

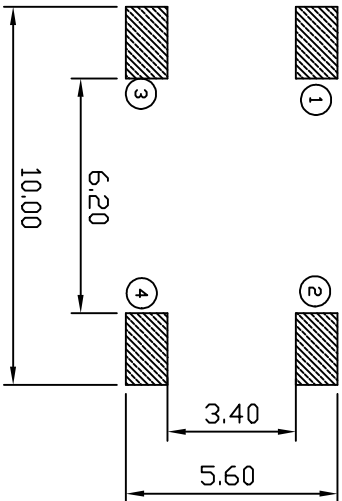
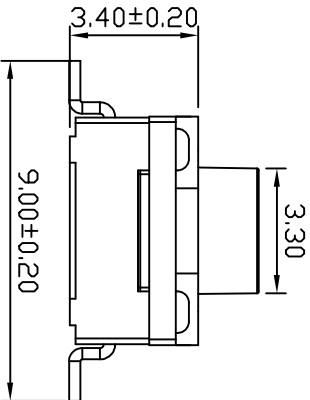



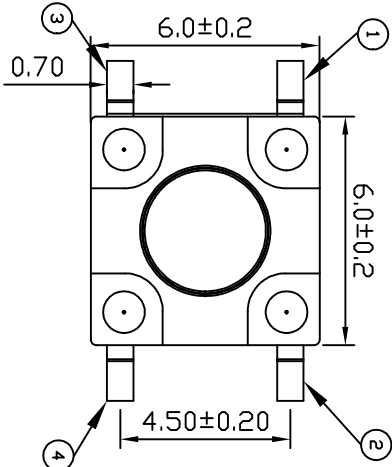

本公司智慧财产未经许可不得复制
ming biao copyright may not be used without permission from ming biao



SPECIFICATIONS:

Operating temperature range: -20°C to +70°C
Rating: 50mA DC 12V Max
Insulation resistance: 100MΩ min. 100V DC
Dielectric strength: 250V. AC. 1Min
Contact resistance: 100mΩ Max
Life: 100,000 Cycles
Travel: 0.25±0.1mm
Operating force: 250±50gf

H	
4.1	4.3
4.5	4.8
5.0	5.5
6.0	6.5
7.0	7.5
8.0	8.5
9.0	9.5
10.0	10.5
11.0	



ROHS COMPLIANT Pb Pb-free Hg Mercury Free				东莞市铭标电子科技有限公司 Ming Biao Electronic Technology Co., Ltd.			
TOLERANCE				DESIGN	DATE	TITLE	Tact Switch
UNLESS OTHERWISE STATED				WYJ	2024.03.12		
X.X	±0.20	SIZE	A4	CHKD	DATE	MODEL	TVCN58-C-R
X.XX	±0.15	REV	A		DATE	SHEET	1/3
X.XXX	±0.10	UNIT	mm	APPD	DATE	PRINT DATE	2025.02.27
≠	±2°	SCALE	5:1				