
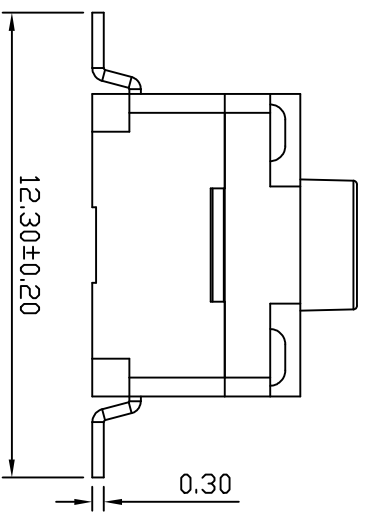

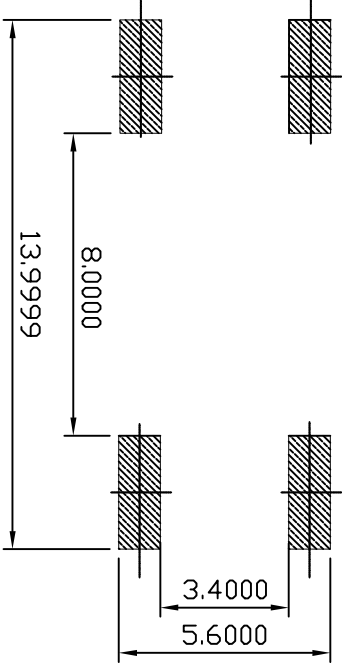


本公司智慧财产未经许可不得复制
ming biao copy/right may not be used without permission from ming biao

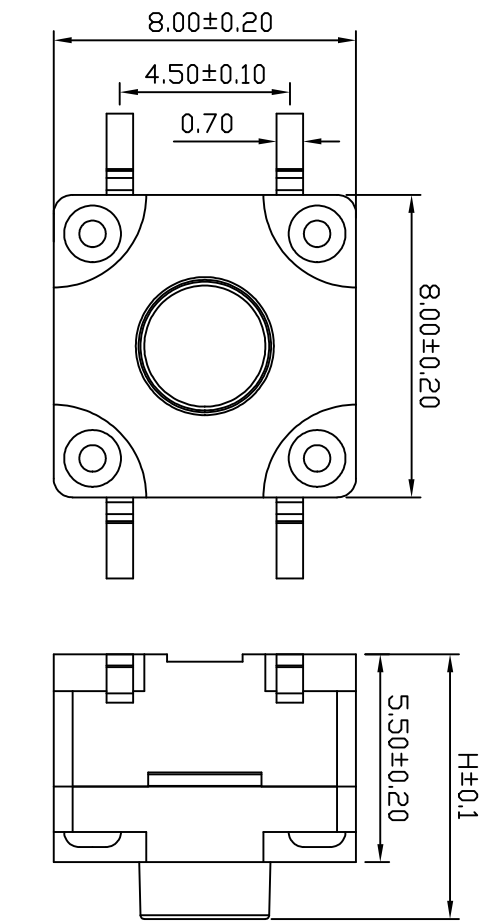

SPECIFICATIONS:

Operating temperature range: -20°C to +70°C
Rating: 50mA DC12V Max
Insulation resistance: 100MΩ min. 100V DC
Dielectric strength: 250V.AC. 1Min
Contact resistance: 100mΩ Max
Life: 100,000 Cycles
Travel: 0.35±0.1mm
Operating force: 250±40gf
防水等级: IP67

H			
6.5	7.0		
7.5	8.0		
8.5	9.0		
9.5	10.0		
10.5	11.0		
11.5	12.0		



TOLERANCE				DESIGN				DATE				TITLE			
UNLESS OTHERWISE STATED				WYJ				2024.03.12				Tact Switch			
X.X	±0.20	SIZE	A4	CHKD				DATE				MODEL			
X.XX	±0.15	REV	A	APPD				DATE				TVCM61-120C-R			
X.XXX	±0.10	UNIT	mm									SHEET			
△	±2°	SCALE	5:1									PRINT DATE			
												1/3			
												2025.04.25			

ROHS COMPLIANT Pb-free Halogen Free
东莞市铭标电子科技有限公司
Ming Biao Electronic Technology Co., Ltd.