


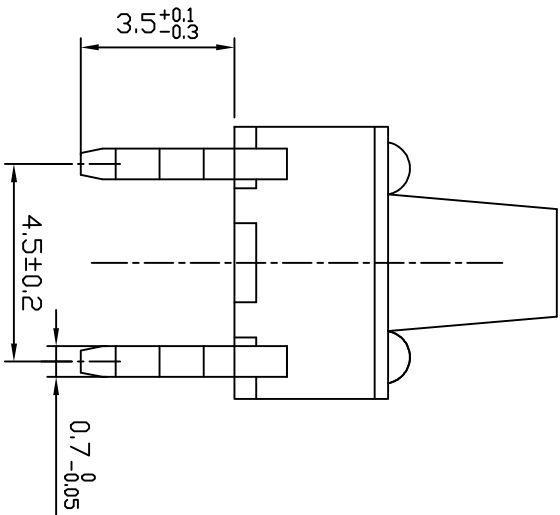
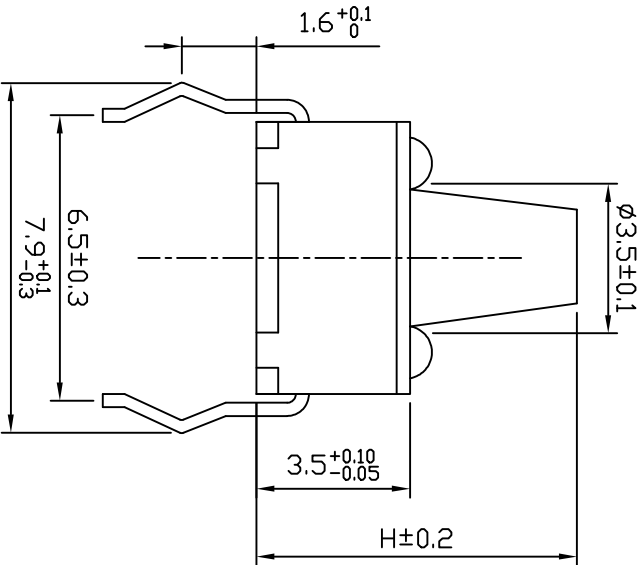



本公司智慧财产未经许可不得复制
ming biao copy/right may not be used without permission from ming biao.

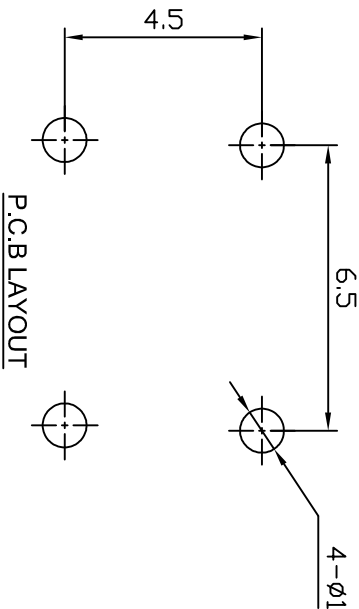

CIRCUIT

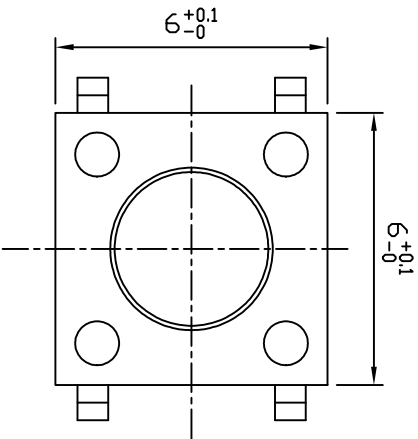

P.C.B LAYOUT

材质: PPA黑色
按钮: 不锈钢
盖板: 不锈钢
弹片: 黄铜
端子: PPA黑色
底座: PPA黑色

SPECIFICATIONS:
Operating temperature range: -20℃to+70℃
Rating: 50mA, 12V DC Max
Insulation resistance: 100MΩ min. 100V DC
Dielectric strength: 250V AC for 1Min
Contact resistance: 100mΩ Max
Life: 100, 000 Cycles
Travel: 0.25±0.10mm
Operating force: 250±50gf

东莞市铭标电子科技有限公司
Ming Biao Electronic Technology Co., Ltd.



H	
4.3	4.5
5.0	5.5
6.0	6.5
7.0	7.5
8.0	8.5
.....	30Hmax

TOLERANCE				DESIGN		DATE		TITLE	
UNLESS OTHERWISE STATED				wyl		2025. 04. 24		Tact Switch	
X.X	±0.20	SIZE	A4	CHKD		DATE		MODEL	
X.XX	±0.15	REV	A	APPD		DATE		TVCP32-050CBSS-B-G	
X.XXX	±0.10	UNIT	mm			SHEET		1/3	
±2°		SCALE	6:1			PRINT DATE		2025.07.07	