
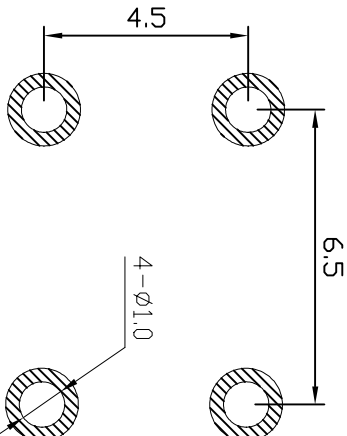
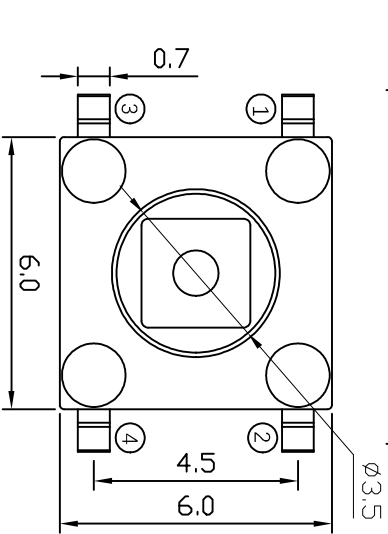

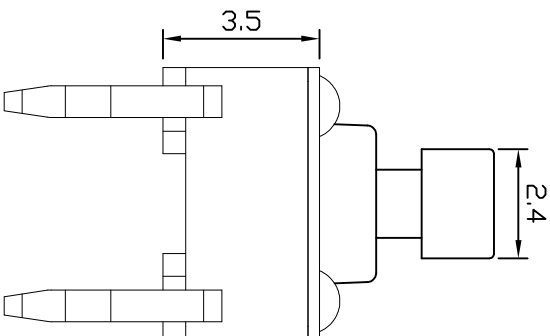


本公司智慧财产未经许可不得复制
ming biao copyright may not be used without permission from ming biao

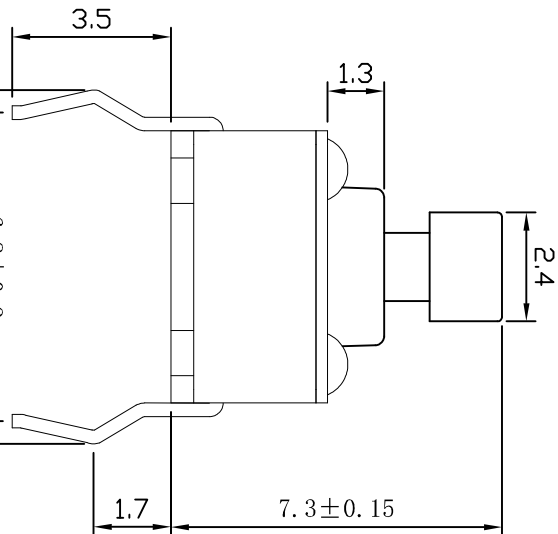

P.C.B LAYOUT

SPECIFICATIONS:

Operating temperature range: -20°C to +70°C
Rating: 50mA, 12V DC Max
Insulation resistance: 100MΩ min, 100V DC
Dielectric strength: 250V AC for 1Min
Contact resistance: 100mΩ Max
Life: 100,000 Cycles
Travel: 0.25±0.1mm
Operating force: 160±50gf

材料:

- | | | |
|-----|-----|------|
| 本体 | PPA | (黑色) |
| 按钮 | PPA | (黑色) |
| 卡件: | 黄铜 | (镀银) |
| 弹片: | 不锈钢 | (镀银) |
| 盖板: | 不锈钢 | 盖 |



RÖHS COMPLIANT Pb-free RoHS Free				东莞市铭标电子科技有限公司 Ming Biao Electronic Technology Co., Ltd.			
TOLERANCE				DESIGN	DATE	TITLE	Tact Switch
UNLESS OTHERWISE STATED				WYJ	2024.09.27		
X.X	±0.20	SIZE	A4	CHKD	DATE	MODEL	TVCP32-G73JBSS-R
X.XX	±0.15	REV	A				
X.XXX	±0.10	UNIT	mm	APPD	DATE	SHEET	1/3
△	±2°	SCALE	6:1			PRINT DATE	2025.07.21