

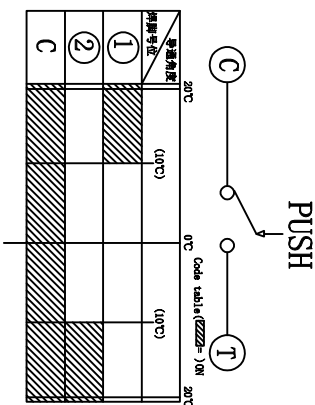


本公司智慧财产未经许可不得复制
ming biao copyright may not be used without permission from ming biao.

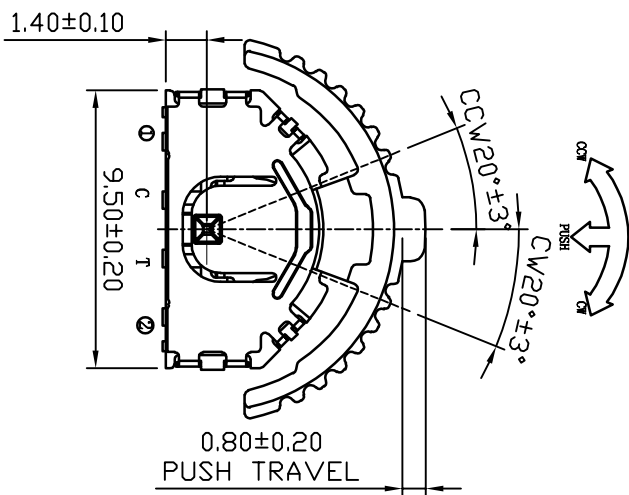

SPECIFICATIONS:

Operating temperature range: -40°C to $+85^{\circ}\text{C}$
Rating: 5mA, 5V DC
Insulation resistance: $100\text{M}\Omega$ min. 100V DC
Dielectric strength: 100V AC for 1min
Contact resistance: $300\text{m}\Omega$ Max
Life: 50,000 Cycles
Travel: $0.8 \pm 0.20\text{mm}$
Operating force: $300 \pm 100\text{gf}$, $80 \pm 50\text{gf}$

P.C.B LAYOUT



RoHS COMPLIANT Pb-free Halogen Free				 东莞市铭标电子科技有限公司 Ming Biao Electronic Technology Co., Ltd.				
TOLERANCE			DESIGN		DATE		TITLE	
UNLESS OTHERWISE STATED			WYJ		2024. 12. 27		DIAL WHEEL SWITCH	
XX	±0.20	SIZE	A4	CHKD	DATE		MODEL	THMU36-X-R
XXX	±0.15	REV	A	APPD	DATE		SHEET	
XXXX	±0.10	UNIT	mm		PRINT DATE		2025.01.22	
SCALE	4:1							