


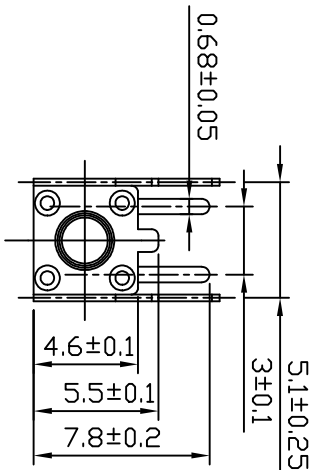
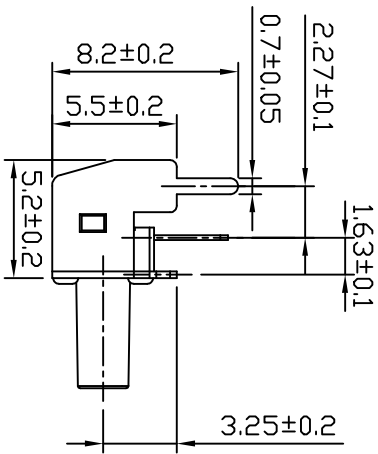



本公司智慧财产未经许可不得复制
ming biao copyright may not be used without permission from ming biao

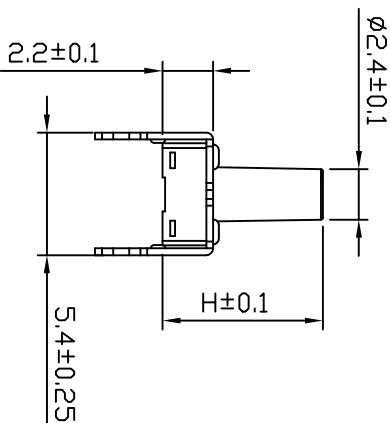

按压力 Operating force	行程 Travel	寿命 Life
160±30g	0.20±0.10	50,000次
260±50g	0.20±0.10	50,000次

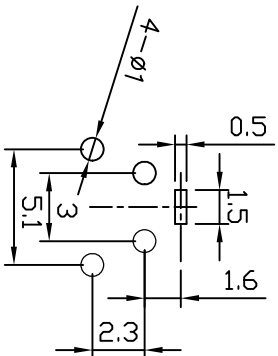

P.C.B LAYOUT



单位 (mm)

H	3.8	4.3	4.5	4.8	5.0	5.5	6-12
---	-----	-----	-----	-----	-----	-----	------



ROHS COMPLIANT Pb-Free Halogen Free				东莞市铭标电子科技有限公司 Ming Biao Electronic Technology Co., Ltd.			
TOLERANCE UNLESS OTHERWISE STATED				DESIGN WYJ	DATE 2024.08.22	TITLE Tact Switch	
X.X	±0.20	SIZE	A4	CHKD	DATE	MODEL	TVBT01-070J-R
X.XX	±0.15	REV	A				
X.XXX	±0.10	UNIT	mm	APPD	DATE	SHEET PRINT DATE	1/2 2025.06.16
△	±2°	SCALE	3:1				

SPECIFICATIONS:

Operating temperature range: -30℃ to +70℃
Rating: 50mA, 12V DC Max
Insulation resistance: 100MΩ min. 250V DC
Dielectric strength: 250V AC for 1Min
Contact resistance: 100mΩ Max
Life: 50,000 Cycles
Travel: 0.20 ± 0.10mm
Operating force: 160 ± 30gf