
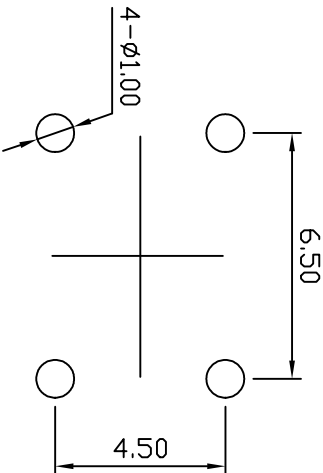
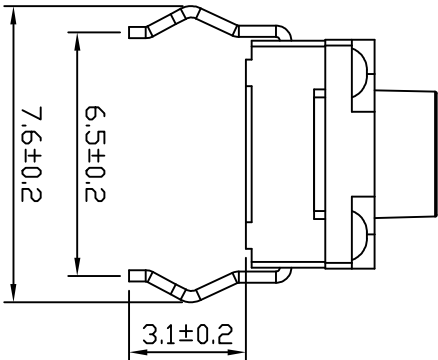

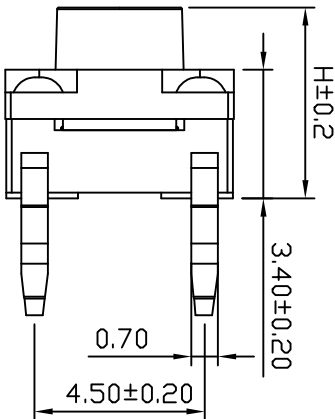


本公司智慧财产未经许可不得复制
ming biao copyright may not be used without permission from ming biao



P.C.B LAYOUT

SPECIFICATIONS:

Operating temperature range: -20°C to +70°C
Rating: 50mA DC/12V Max
Insulation resistance: 100MΩ min. 100V DC
Dielectric strength: 250V. AC. 1Min
Contact resistance: 100mΩ Max
Life: 100,000 Cycles
Travel: 0.3±0.1mm
Operating force: 250±40gf

H

G

F

E

D

C

B

A

H

G

F

E

D

C

B

A

H

G

F

E

D

C

B

A

H

G

F

E

D

C

B

A

H

G

F

E

D

C

B

A

H

G

F

E

D

C

B

A

H

G

F

E

D

C

B

A

H

G

F

E

D

C

B

A

H

G

F

E

D

C

B

A

H

G

F

E

D

C

B

A

H

G

F

E

D

C

B

A

H

G

F

E

D

C

B

A

H

G

F

E

D

C

B

A

H

G

F

E

D

C

B

A

H

G

F

E

D

C

B

A

H

G

F

E

D

C

B

A

H

G

F

E

D

C

B

A

H

G

F

E

D

C

B

A

H

G

F

E

D

C

B

A

H

G

F

E

D

C

B

A

H

G

F

E

D

C

B

A

H

G

F

E

D

C

B

A

H

G

F

E

D

C

B

A

H

G

F

E

D

C

B

A

H

G

F

E

D

C

B

A

H

G

F

E

D

C

B

A

H

G

F

E

D

C

B

A

H

G

F

E

D

C

B

A

H

G

F

E

D

C

B

A

H

G

F

E

D

C

B

A

H

G

F

E

D

C

B

A

H

G

F

E

D

C

B

A

H

G

F

E

D

C

B

A

H

G

F

E

D

C

B

A

H

G

F

E

D

C

B

A

H

G

F

E

D

C

B

A

H

G

F

E

D

C

B

A

H

G

F

E

D

C

B

A

H

G

F

E

D

C

B

A

H

G

F

E

D

C

B

A

H

G

F

E

D

C

B

A

H

G

F

E

D

C

B

A

H

G

F

E

D

C

B

A

H

G

F

E

D

C

B

A

H

G

F

E

D

C

B

A

H

G

F

E

D

C

B

A

H

G

F

E

D

C

B

A

H

G