


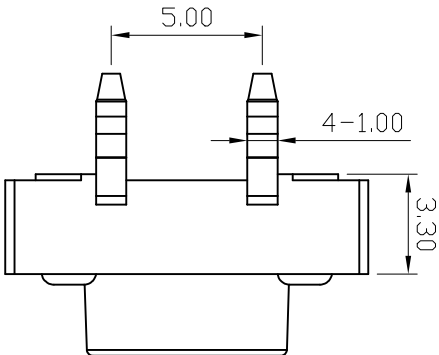




H	
4.3	4.5
5.0	5.5
6.0	6.5
.....	
18.0	18.5
19.0	19.5

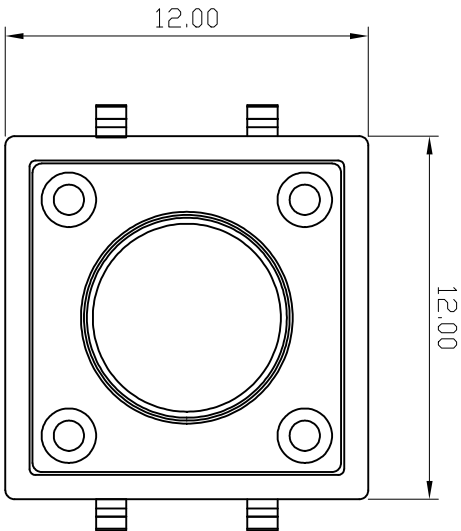

本公司智慧财产未经许可不得复制
ming biao copyright may not be used without permission from ming biao



CIRCUIT

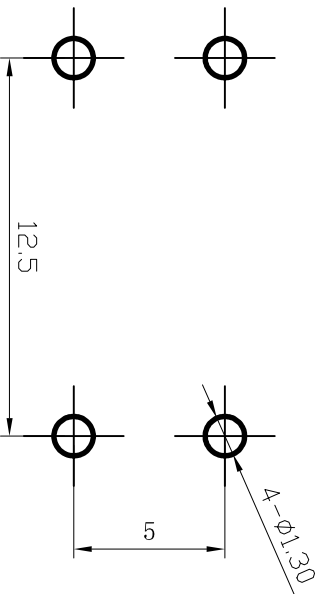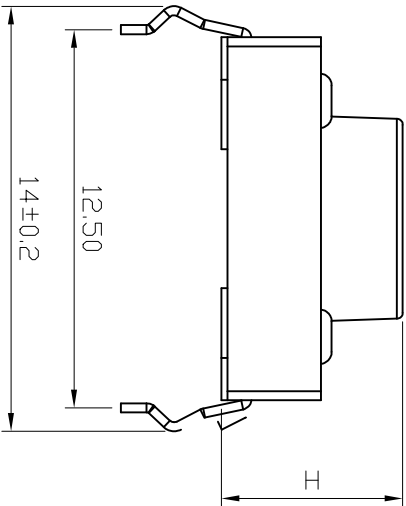

P.B.C LAYOUT

SPECIFICATIONS:

Operating temperature range: -40°C to +85°C
Rating: 50mA, 12V DC Max
Insulation resistance: 100MΩ min, 100V DC
Dielectric strength: 250V AC for 1Min
Contact resistance: 100mΩ Max
Life: 100,000 Cycles
Travel: 0.35±0.1mm
Operating force: 250±50gf



Rohs COMPLIANT Pb-Free RoHS Compliant				东莞市铭标电子科技有限公司 Ming Biao Electronic Technology Co., Ltd.			
TOLERANCE				DESIGN	DATE	TITLE	Tact Switch
UNLESS OTHERWISE STATED				WYJ	2025.11.18		
X.X	±0.20	SIZE	A4	CHKD	DATE	MODEL	TVDP01
X.XX	±0.15	REV	A				
X.XXX	±0.10	UNIT	mm	APPD	DATE	SHEET	1/3
	±2°	SCALE	4:1			PRINT DATE	2025.11.18