
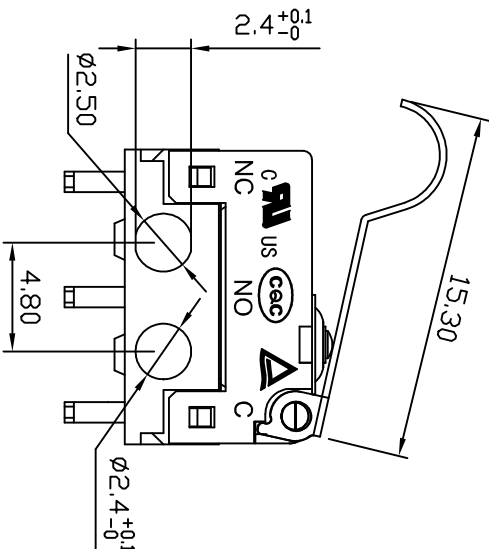
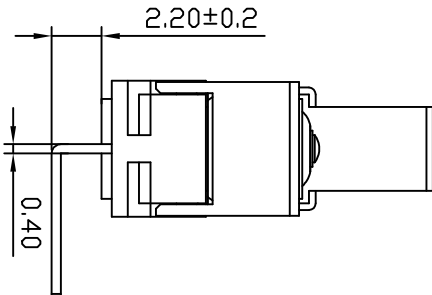
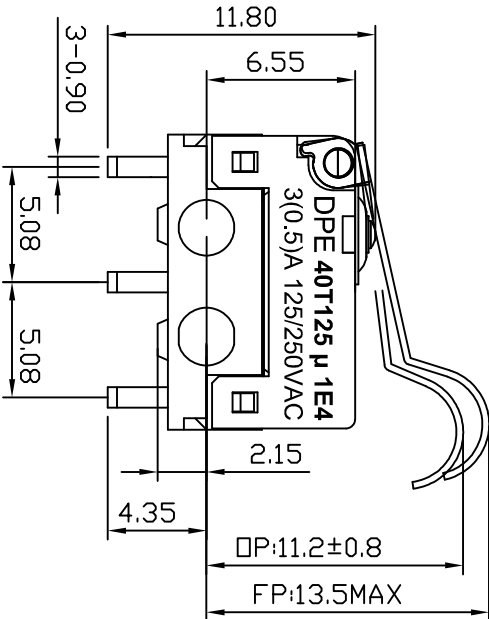




本公司智慧财产未经许可不得复制
ming biao copyright may not be used without permission from ming biao

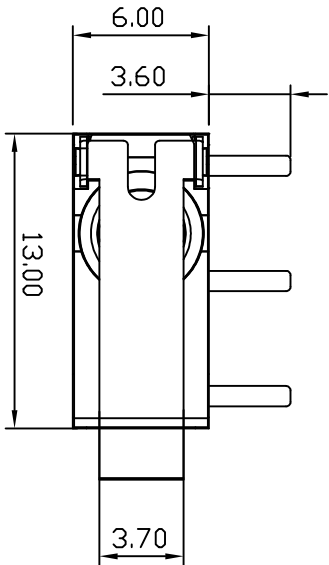

Rating	3A DC48V	Electrical Life	30,000 cycles
Contact Resistance	3A 125VAC	Mechanical Life	10,000 cycles
Insulation Resistance	100mΩ Max	Ambient Temper. Used	300,000 cycles
Withstand Voltage	>100MΩ DC500V	Ambient Humidity Used	-25℃ to +85℃
Soldering Temper.	AC500V 1min.	Operating Force	≤85% at +40℃
	235±5℃ 5s		60gf max

说明 利用橡胶封装的密封结构实现防尘防水 (IEC IP67) 端子部分除外。

8	密封垫	1	TPE	
7	密封帽	1	硅胶	
6	端子	3	C2680	镀银
5	触点	3	银合金	
4	按钮	1	PBT UL94 V0	
3	弹片	1	C17200	进口镀铜
2	盖片	1	PA66 UL94 V0	
1	底座	1	PBT UL94 V0	
序号	零件名称	数量	材质	备注



RÖHS COMPLIANT Pb-free		DESIGN		DATE		TITLE	
UNLESS OTHERWISE STATED		CHKD		2024.12.12		DP系列密封型超小型微动开关	
X.X	±0.20	SIZE	A4	DATE		MODEL	
X.XX	±0.15	REV	A	DATE		DPE-D-05CR(右弯脚)	
X.XXX	±0.10	UNIT	mm	DATE		SHEET	
△	±2°	SCALE	3:1	DATE		PRINT DATE	
						1/3	
						2025.02.28	

东莞市铭标电子科技有限公司
Ming Biao Electronic Technology Co., Ltd.