


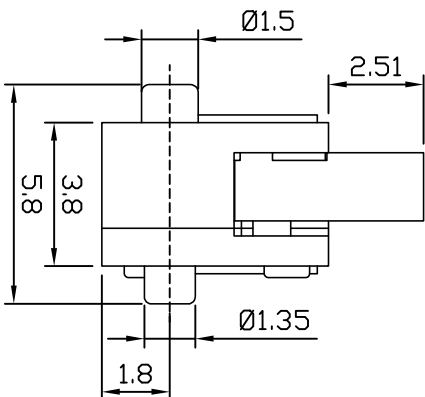


本公司智慧财产未经许可不得复制
ming biao copyright may not be used without permission from ming biao.

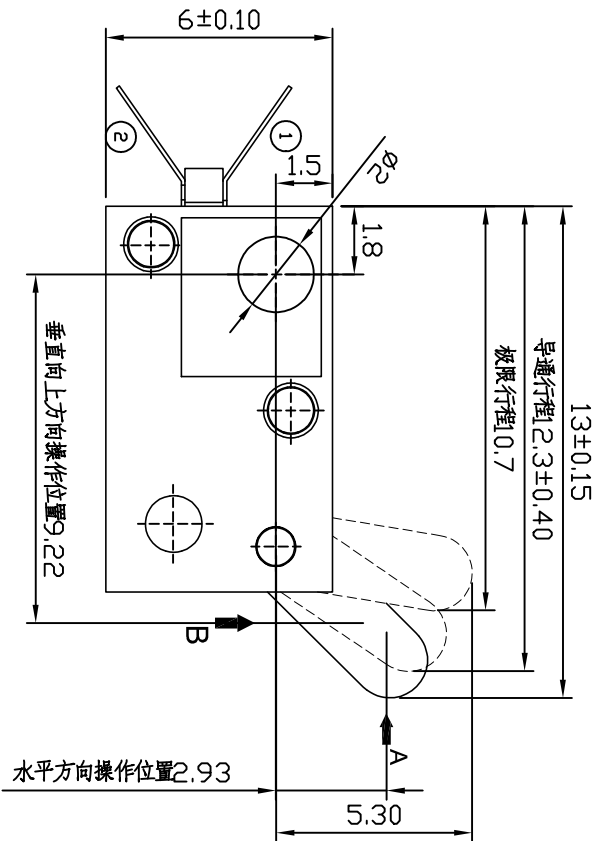

SPECIFICATIONS:

Operating temperature range: -10°C to +60°C
Rating: Max 500mA 16V DC
Insulation resistance: 50M Ω min. 250V DC
Dielectric strength: 250V, AC, 1min
Contact resistance: 200m Ω Max
Life: 10,000 Cycles
Operating force: 20 $\pm$ 10gf

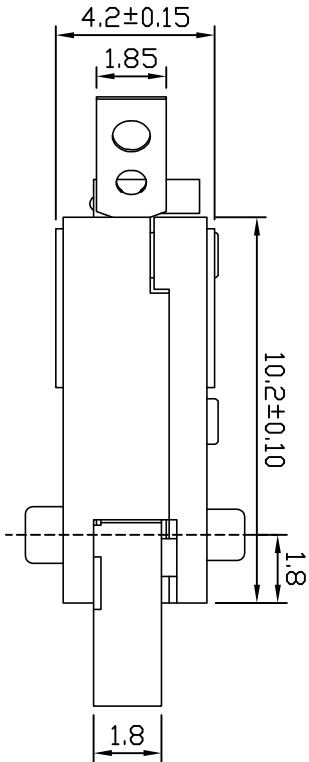

RoHS COMPLIANT Pb-Free Halogen Free				东莞市铭标电子科技有限公司 Ming Biao Electronic Technology Co., Ltd.			
TOLERANCE UNLESS OTHERWISE STATED				DESIGN	DATE	TITLE	Detector Switch
X.X	±0.20	SIZE	A4	CHKD	2024.06.12	MODEL	LM-V-101
X.XX	±0.15	REV	A	APPD	DATE	SHEET	1/3
X.XXX	±0.10	UNIT	mm		PRINT DATE	2025.06.09	
±2°	SCALE	5:1					