


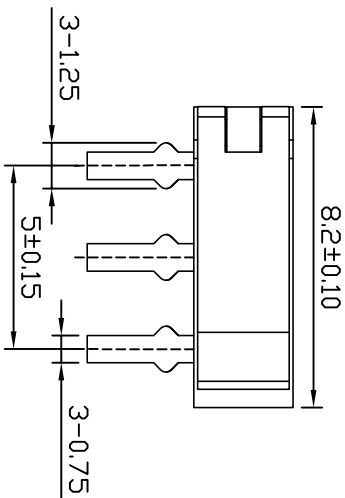


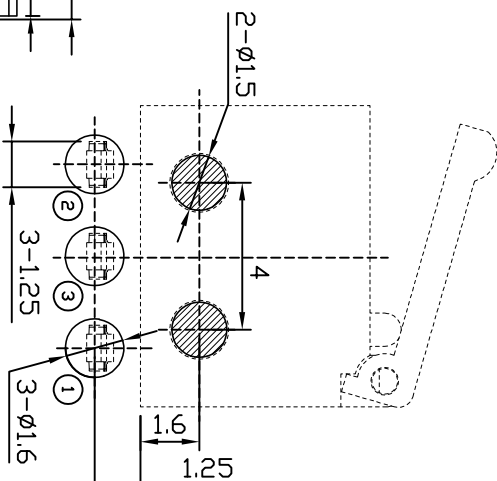

垂直向下方向操作位置6.92

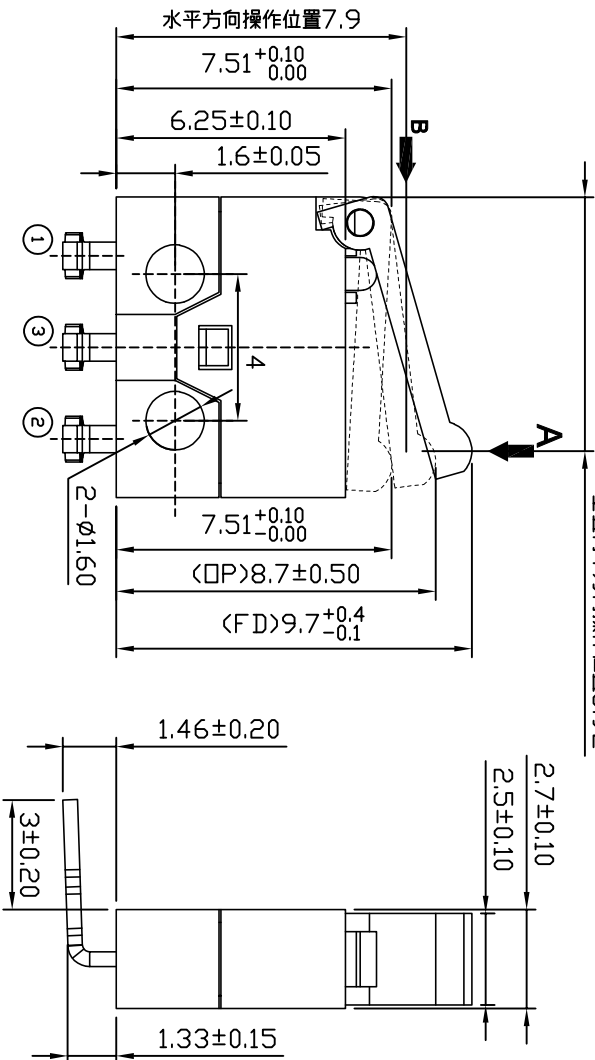

P.C.B LAYOUT



本公司智慧财产未经许可不得复制
ming biao copyright may not be used without permission from ming biao.

SPECIFICATIONS:

Operating temperature range: -10℃ to +60℃
Rating: Max 50mA 16V DC
Insulation resistance: 50MΩ min. 100V DC
Dielectric strength: 100V.AC. 1Min
Contact resistance: 20mΩ Max
Life: 20,000 Cycles
Operating force: 25±5gf Max



ROHS COMPLIANT Pb-Free HF				Ming Biao 东莞市铭标电子科技有限公司 Ming Biao Electronic Technology Co., Ltd.			
TOLERANCE				DESIGN	DATE	TITLE	Detector Switch
UNLESS OTHERWISE STATED				DATE	2024.06.12		
XX	±0.20	SIZE	A4	CHKD	DATE	MODEL	LM-V-307(左)
XXX	±0.15	REV	A				
XXX	±0.10	UNIT	mm	APPD	DATE	SHEET	1/3
	±2°	SCALE	5:1		PRINT DATE		2025.02.11