


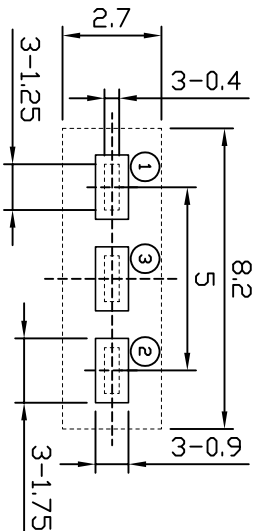



本公司智慧财产未经许可不得复制
ming biao copyright may not be used without permission from ming biao.

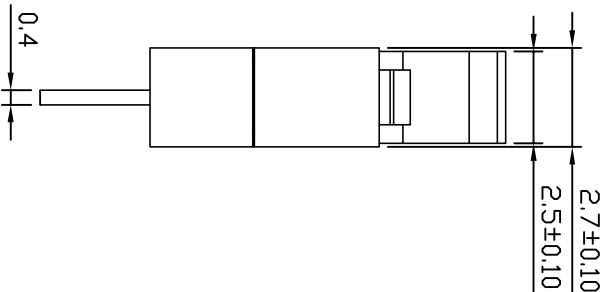

CIRCUIT

P.C.B LAYOUT

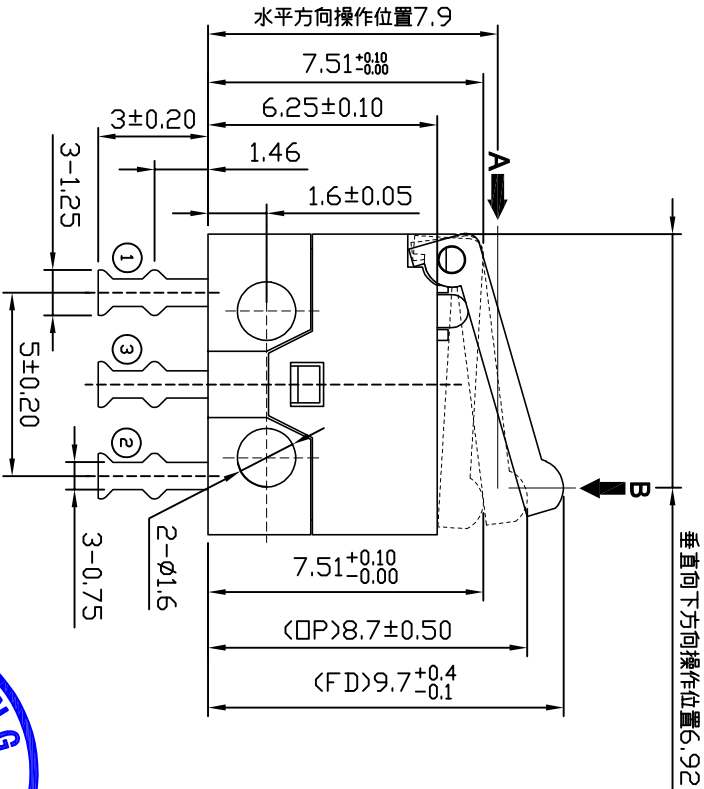

SPECIFICATIONS:

Operating temperature range: -10℃ to +60℃
Rating: Max 50mA 16V DC
Insulation resistance: 50MΩ min. 100V DC
Dielectric strength: 250V AC 1min
Contact resistance: 200mΩ Max
Life: 20,000 Cycles
Operating force: 25±5gf Max



R&D COMPLIANT Pb-free RoHS				Ming Biao Electronic Technology Co., Ltd.			
TOLERANCE				DESIGN	DATE	TITLE	Detector Switch
UNLESS OTHERWISE STATED				WYJ	2024.06.14		
XX	±0.20	SIZE	A4	CHKD	DATE	MODEL	LM-V-307
XXX	±0.15	REV	A				
XXX	±0.10	UNIT	mm	APPD	DATE	SHEET	1/3
	±2°	SCALE	5:1			PRINT DATE	2025.02.11