

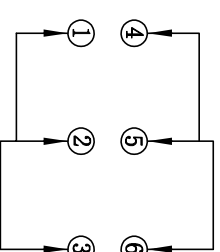


1		2	3	4		5
7	CONTACT	PBS C5210R-EH		1	Ag CLAD	
6	TERMINAL	BRASS STRIP		1	Ag COATING	
5	SPRING	SUS		1	NATURAL	
4	CAM STICK	SUS		1	NATURAL	
3	CASE	PPA		1	GREY	
2	COVER	PPA		1	BLACK	
1	KNOB	PPA		1	WHITE	
NO.	PARTS	MATERIALS		Q'TY	FINISH	



本公司智慧財產未經許可不得复制



Circuit



P.C.B LAYOUT

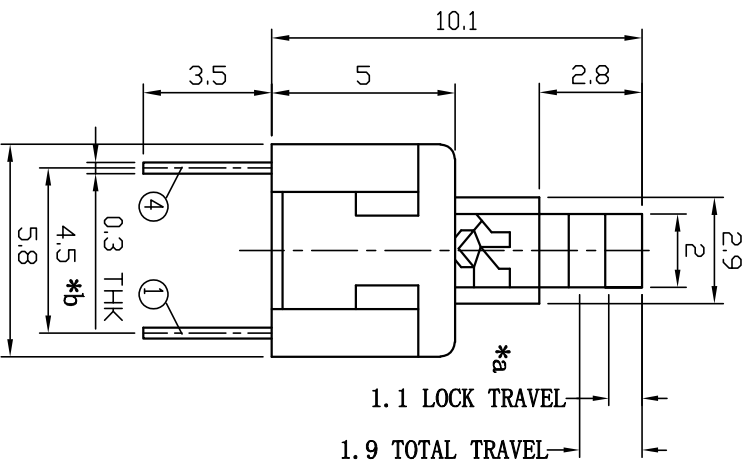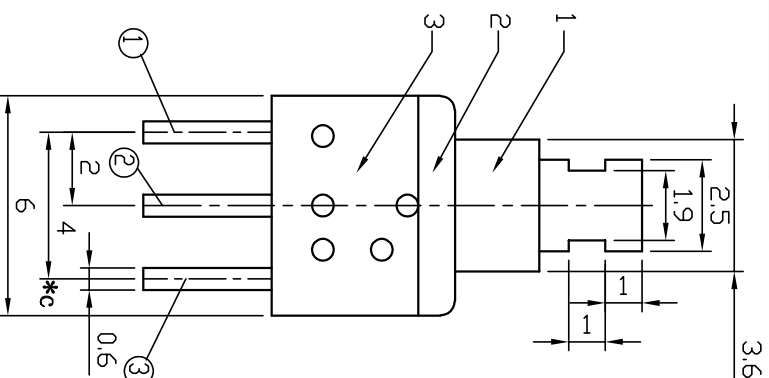

SPECIFICATIONS:

Operating temperature range:-16°C to +60°C
Rating: 0.2A, 12V DC Max
Insulation resistance: 100M Ω min. 500V DC
Dielectric strength: 500V AC for 1Min
Contact resistance: 70m Ω Max
Life: 10,000 Cycles
Travel: 1.9mm
Operating force: 250 $\pm$ 100gf



RÖHS COMPLIANT Pb Pb-Free Hf Halogen Free				东莞市铭标电子科技有限公司 Ming Biao Electronic Technology Co., Ltd							
TOLERANCE				DESIGN		DATE		TITLE		VERTICAL PUSH SWITCH	
UNLESS OTHERWISE STATED				%yy%		2024. 08. 28					
X.X	#0.20	SIZE	A4	CHKD		DATE		MODEL		PB22E60-PPA	
X.XX	#0.15	REV	A								
X.XXX	#0.10	UNIT	mm	APPD		DATE		SHEET		1/1	
A	#2°	SCALE	5:1					PRINT DATE		2025.02.12	