

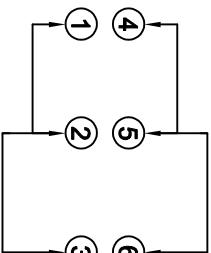


1	CONTACT CLIP	PBS C5210R-EH	2	AG CLAD
6	SPRING	SUS	1	NATURAL
5	CAM STICK	SUS	1	NATURAL
4	TERMINAL	BRASS STRIP	6	AG PLATED
3	CASE	PPA	1	BLACK
2	COVER	PA66	1	BLACK
1	KNOB	POM	1	WHITE
NO.	PARTS	MATERIALS	Q'TY	FINISH

本公司智慧财产未经许可不得复制
ming biao copyright may not be used without permission from ming biao.





CIRCUIT



P.C.B LAYOUT

注：“*”表示关键尺寸(3个).

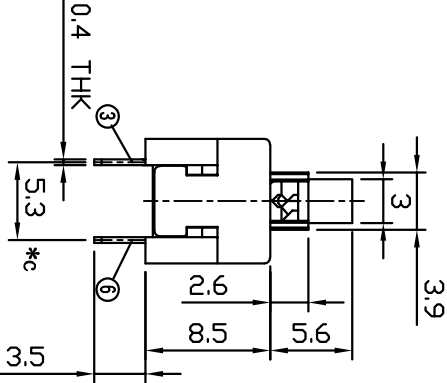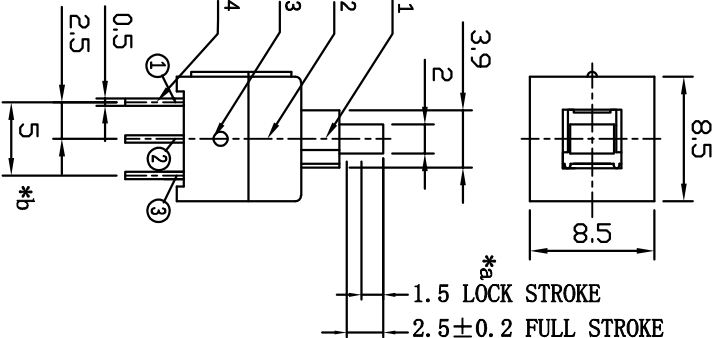

SPECIFICATIONS:

Operating temperature range:-25℃to+85℃
Rating:100mA, 30V DC Max
Insulation resistance:100MΩ min, 500V DC
Dielectric strength:500V AC for 1Min
Contact resistance:50mΩ Max
Life:10, 000 Cycles
Travel:2.5±0.2
Operating force:250±100gf



R&D DEPT				Ming Biao Electronic Technology Co., Ltd.			
2024.08.28				PB22E86			
ISSUED				1/1			
2025.02.12				PRINT DATE			