

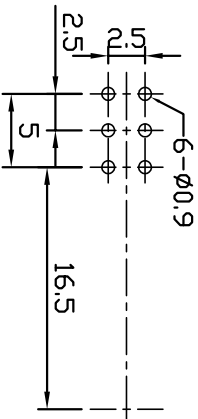



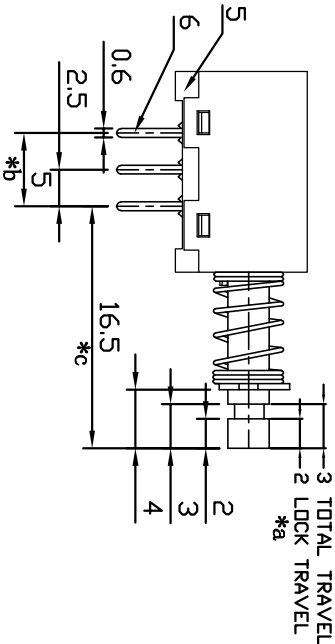

本公司智慧财产未经许可不得复制
ming biao copyright may not be used without permission from ming biao.

	1	2	3	4	5	6	7	8	9	10
A	9 SPRING PLATE	PBS STRIP	1	NATURAL						
	8 CONTACT CLIP	PBS C5210R-EH	2	Ag CLAD						
	7 CAM STICK	BRASS WIRE	1	Ni PLATED						
	6 TERMINAL	BRASS STRIP	6	Ag PLATED						
	5 BASE	PPA	1	BLACK						
	4 COVER	PC	1	BLUE						
B	3 SPRING	STEEL WIRE	1	Ni PLATED						
	2 BLOCK	STEEL STRIP	1	Ni PLATED						
	1 KNOB	PA66	1	BLACK						
	NO. PARTS	MATERIALS	Q'TY	FINISH						

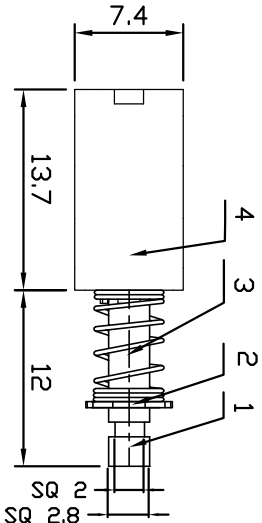

P.C.B LAYOUT

注：“*”表示关键尺寸(5个).

SPECIFICATIONS:

Operating temperature range:-16℃to+60℃
Rating:0.3A,50V DC Max
Insulation resistance:100MΩ min,500V DC
Dielectric strength:500V AC for 1Min
Contact resistance:50mΩ Max
Life:10,000 Cycles
Travel:3.0 mm
Operating force:250±100gf



R&D HS COMPLIANT Pb-Free RoHS				Ming Biao Electronic Technology Co., Ltd.			
TOLERANCE				DESIGN	DATE	TITLE	PLASTIC PUSH SWITCH
UNLESS OTHERWISE STATED				CHKD	2024.08.28		
XX	±0.20	SIZE	A4		DATE		
XXX	±0.15	REV	A			MODEL	PBS-22D06
XXX	±0.10	UNIT	mm	APPD	DATE		
±2°	SCALE	2:1				SHEET	1/1
						PRINT DATE	2025.02.12