








本公司智慧财产未经许可不得复制
ming biao copyright may not be used without permission from ming biao.

1	2	3	4	5	6	7	8	9	10
9	SPRING PLATE	PBS STRIP	1	NATURAL					
8	CONTACT CLIP	PBS C5210R-EH	4	Ag CLAD					
7	CAM STICK	BRASS WIRE	1	Ni PLATED					
6	TERMINAL	BRASS STRIP	12	Ag PLATED					
5	BASE	PPA	1	BLACK					
4	COVER	PC	1	BLUE					
3	SPRING	STEEL WIRE	1	Ni PLATED					
2	BLOCK	STEEL STRIP	1	Ni PLATED					
1	KNOB	PA66	1	BLACK					
PARTS		MATERIALS		Q'TY	FINISH				

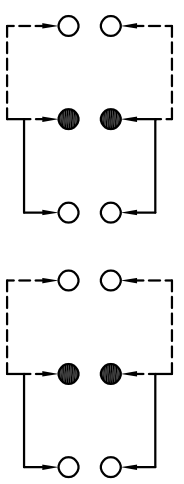

CIRCUIT

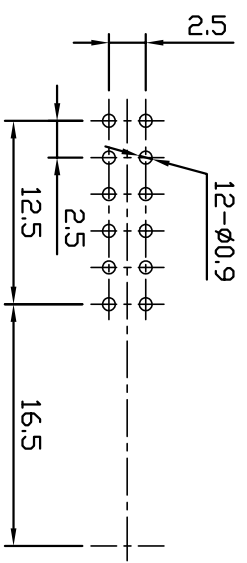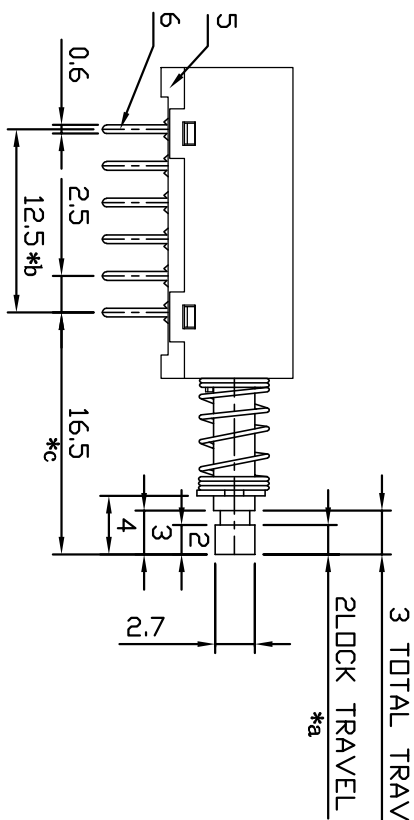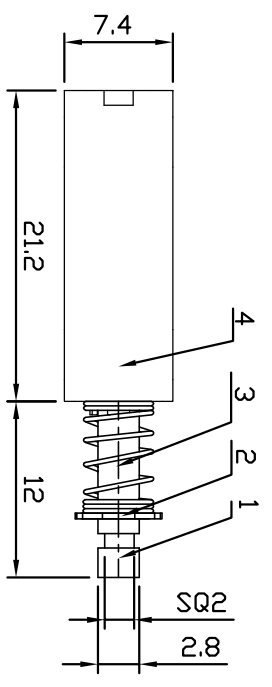

注：“*”表示关键尺寸(5个).

SPECIFICATIONS:

Operating temperature range:-16℃to+60℃
Rating:0.3A, 50V DC Max
Insulation resistance:100MΩ min, 500V DC
Dielectric strength:500V AC for 1Min
Contact resistance:50mΩ Max
Life:10, 000 Cycles
Travel:3. 0mm
Operating force:350±100gf



R&D DEPT.		DESIGN		DATE		TITLE	
UNLESS OTHERWISE STATED		CHKD		DATE		PLASTIC PUSH SWITCH	
X.X		±0.20		SIZE		A4	
X.XX		±0.15		REV		A	
X.XXX		±0.10		UNIT		mm	
±2°		SCALE		2:1			

东莞市铭标电子科技有限公司
Ming Biao Electronic Technology Co., Ltd.

