

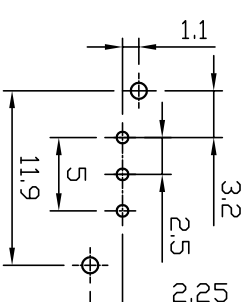
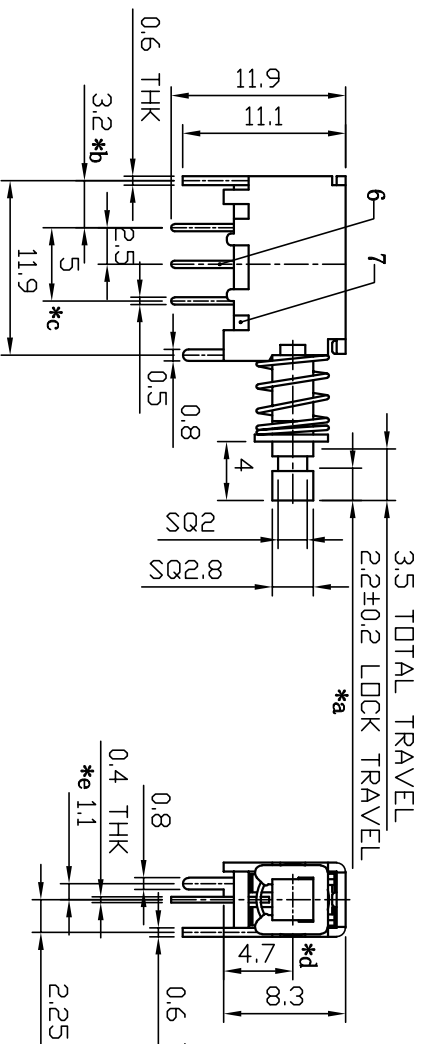


1	2	3	4	5	6	7	8	9	10
9	CONTACT CLIP	PBS C5210R-EH	1	Ag CLAD	本公司智慧财产未经许可不得复制 ming biao copyright may not be used without permission from ming biao.				
8	SPRING PLATE	PBS STRIP	1	NATURAL					
7	BASE	PHENOLIC RESIN	1	NATURAL					
6	TERMINAL	BRASS STRIP	3	Ag PLATED					
5	KNOB	PA66	1	BLUE					
4	BLOCK	STEEL STRIP	1	Ni PLATED					
3	SPRING	STEEL WIRE	1	Ni PLATED					
2	CAM STICK	PBS WIRE	1	NATURAL					
1	FRAME	STEEL STRIP	1	Ni PLATED					
NO.	PARTS	MATERIALS	Q'TY	FINISHING					

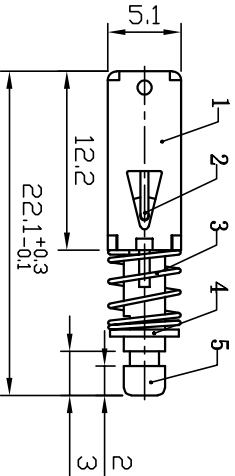

P.C.B LAYOUT

注：“*”表示关键尺寸(5个).

SPECIFICATIONS:

Operating temperature range: -16℃to+60℃
Rating: 0.5A, 30V DC Max
Insulation resistance: 100MΩ min. 500V DC
Dielectric strength: 500V AC for 1Min
Contact resistance: 50mΩ Max
Life: 10, 000 Cycles
Travel: 3.5mm
Operating force: 250±100gf



RÖHS COMPLIANT Pb-free			DESIGN			DATE			TITLE		
TOLERANCE			UNLESS OTHERWISE STATED			DATE			DATE		
X.X			±0.20			SIZE			A4		
X.XX			±0.15			REV			A		
X.XXX			±0.10			UNIT			mm		
✓			±2°			SCALE			2:1		
Ming Biao Electronic Technology Co., Ltd.			APPD			DATE			SHEET		
									1/1		
									PRINT DATE		
									2025.02.12		