
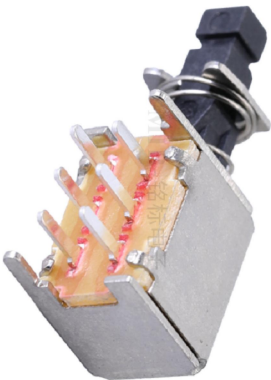

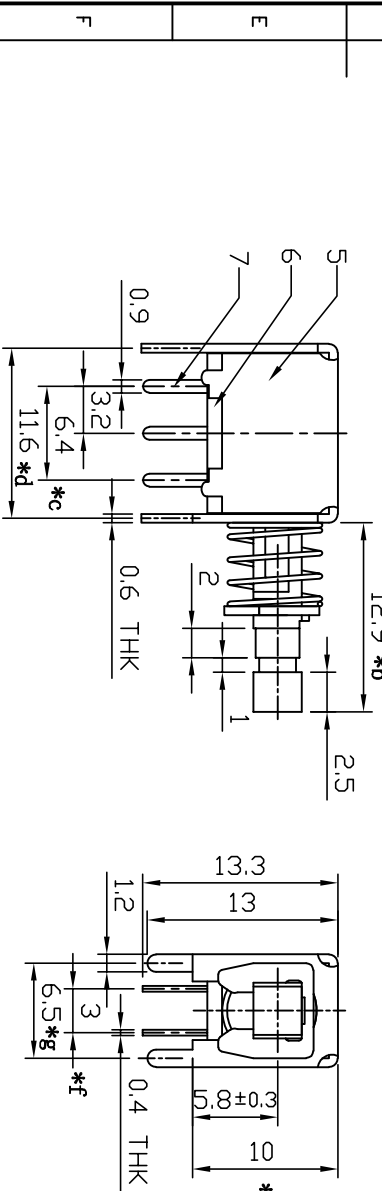


		1	2	3	4	5	6	7	8	9	10
A	9	CONTACT CLIP	PBS C5210R-EH	2	Ag CLAD	本公司智慧财产未经许可不得复制 ming biao copyright may not be used without permission from ming biao. 					
	8	CAM STICK	PBS WIRE	1	NATURAL						
	7	TERMINAL	BRASS STRIP	6	Ag PLATED						
	6	BASE	PHENOLIC RESIN	1	NATURAL						
	5	FRAME	STEEL STRIP	1	Ni PLATED						
	4	SPRING PLATE	PBS STRIP	1	NATURAL						
B	3	SPRING	STEEL WIRE	1	Ni PLATED						
	2	BLOCK	STEEL STRIP	1	Ni PLATED						
	1	KNOB	PA66	1	BLACK						
	NO.	PARTS	MATERIALS	Q'TY	FINISH						

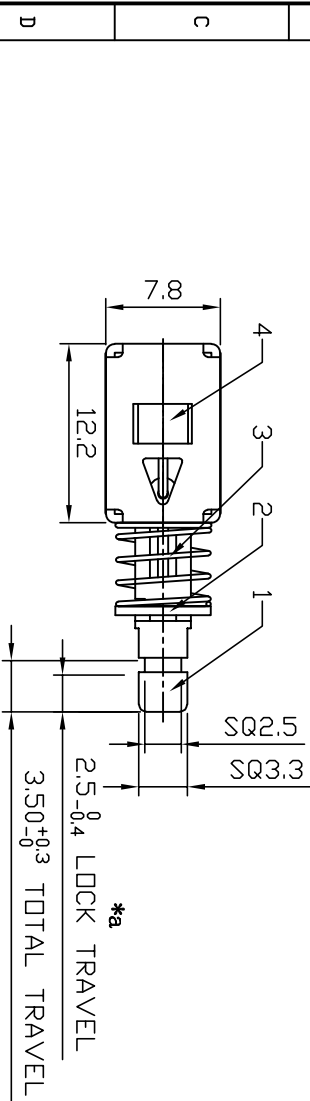

注: “*”表示关键尺寸(7个)

P.C.B LAYOUT

SPECIFICATIONS:

Operating temperature range:-16℃to+60℃
Rating:0.3A, 50V DC Max
Insulation resistance:100MΩ min, 500V DC
Dielectric strength:500V AC for 1min
Contact resistance:50mΩ Max
Life:10, 000 Cycles
Travel:3.5±0.3mm
Operating force:250±100gf



RÖHS COMPLIANT		Pb-free		RoHS		Ming Biao Electronic Technology Co., Ltd.	
TOLERANCE		DESIGN		DATE		TITLE	
UNLESS OTHERWISE STATED		7/12		2024. 08. 30		PUSH SWITCH	
XX	±0.20	SIZE	A4	DATE		MODEL	PS22F02-Cs
XXX	±0.15	REV	A	DATE			
X.XXX	±0.10	UNIT	mm	APPD			
±	±2°	SCALE	2:1	DATE		SHEET	1/1
						PRINT DATE	2025.02.12

