

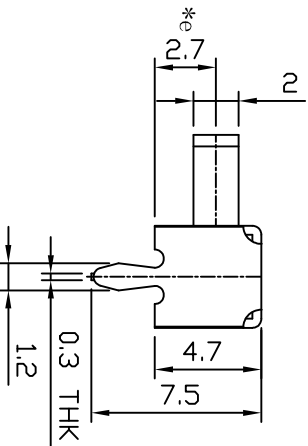
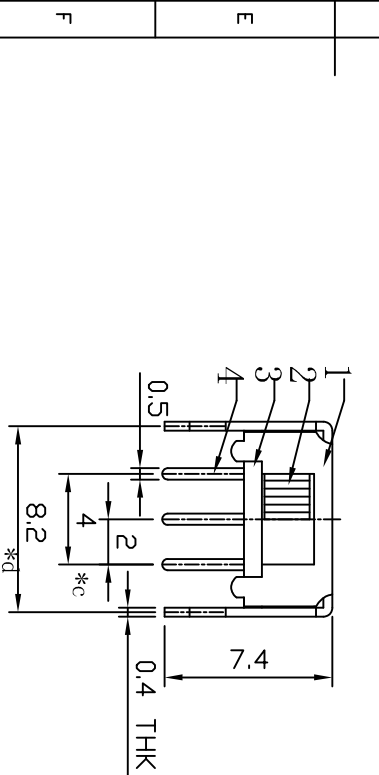




1		2	3	4	
6	SPRING PLATE	PBS STRIP	1	NATURAL	
5	CONTACT CLIP	PBS C5210R-EH	1	Ag CLAD	
4	TERMINAL	BRASS STRIP	3	Ag PLATED	
3	BASE	PHENOLIC RESIN	1	NATURAL	
2	KNOB	PA66	1	BLACK	
1	FRAME	STEEL STRIP	1	Ni PLATED	
NO. PARTS		MATERIALS	Q' TY	FINISH	

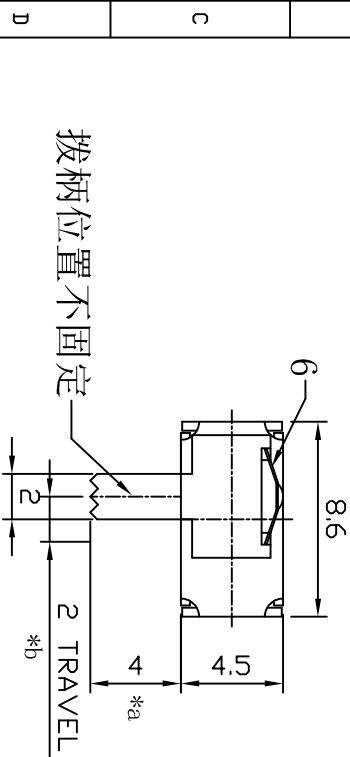

P.C.B LAYOUT

注: “*” 表示关键尺寸 (5个)

CIRCUIT

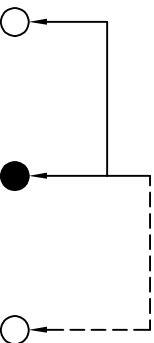

SPECIFICATIONS:

Operating temperature range:-16℃to+60℃
Rating:0.5A.50V DC Max
Insulation resistance:100MΩ min. 500V DC
Dielectric strength:500V AC for 1min
Contact resistance:50mΩ Max
Life:10,000 Cycles
Travel:2.0mm
Operating force:250±100gf



R&D DEREGISTRATION				RoHS COMPLIANT				Pb-Free				Halogeen free			
TOLERANCE				DESIGN				DATE				TITLE			
UNLESS OTHERWISE STATED				CHKD				DATE				MODEL			
X.X	±0.20	SIZE	A4	APPD				DATE				SK12D02G4-NF-Cs			
X.XX	±0.15	REV	A												
X.XXX	±0.10	UNIT	mm												
±	±2°	SCALE	3:1												