


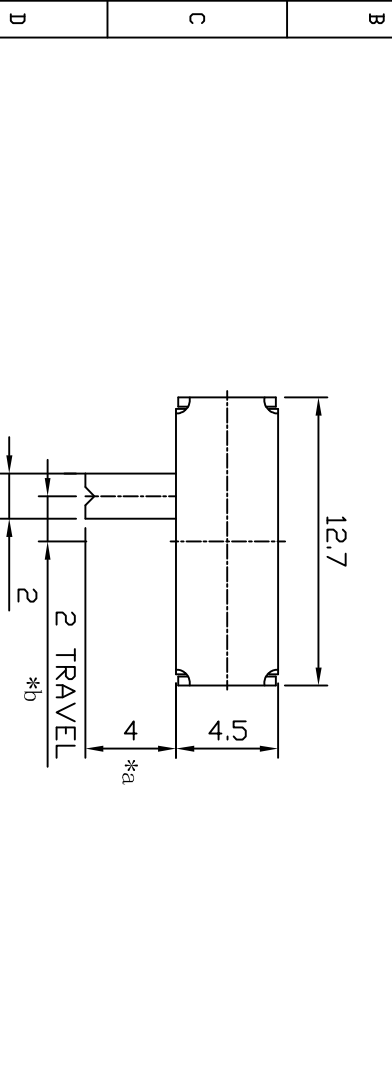
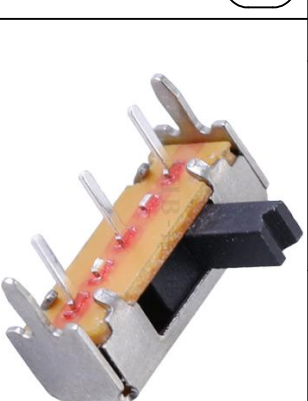
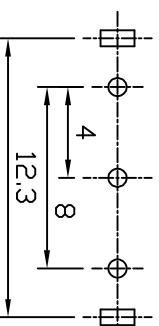


1	2	3	4	5
6	SPRING PLATE	PBS STRIP	1	NATURAL
5	CONTACT CLIP	PBS C5210R-EH	1	Ag CLAD
4	TERMINAL	BRASS STRIP	3	Ag PLATED
3	BASE	PHENOLIC RESIN	1	NATURAL
2	KNOB	PA66	1	BLACK
1	FRAME	STEEL STRIP	1	Ni PLATED
NO.	PARTS	MATERIALS	Q'TY	FINISH

本公司智慧财产未经许可不得复制
ming biao copy/right may not be used without permission from ming biao.

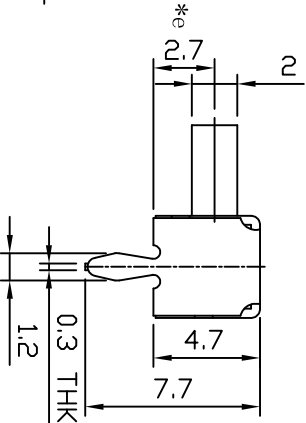

CIRCUIT

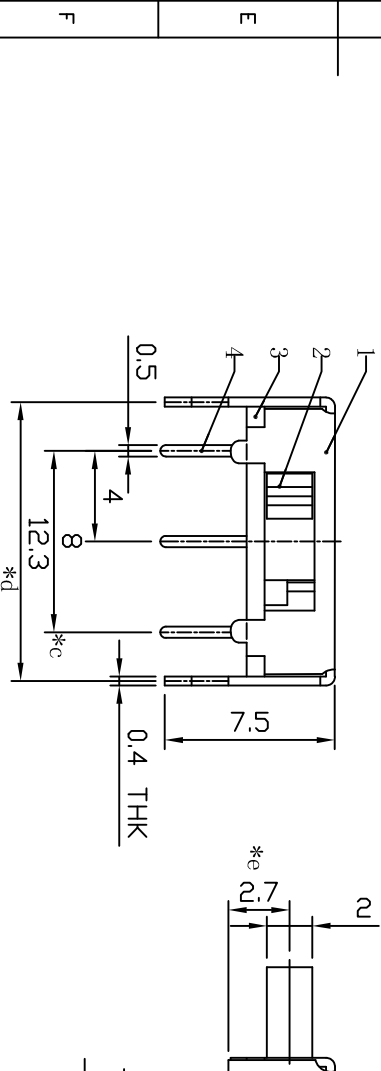

P.C.B LAYOUT

注: "*"表示关键尺寸(5个).

SPECIFICATIONS:

Operating temperature range: -16°C to +60°C
Rating: 0.3A, 50V DC Max
Insulation resistance: 100MΩ min, 500V DC
Dielectric strength: 500V AC for 1Min
Contact resistance: 50mΩ Max
Life: 10,000 Cycles
Travel: 2.0mm
Operating force: 250 ± 100gf



RÖHS COMPLIANT Pb-Free RoHS Compliant				东莞市铭标电子科技有限公司 Ming Biao Electronic Technology Co., Ltd.			
TOLERANCE				DESIGN	DATE	TITLE	
UNLESS OTHERWISE STATED				WYJ	2024. 08. 30	HORIZONTAL SLIDE SWITCH	
X.X	±0.20	SIZE	A4	CHKD	DATE	MODEL	SK13D02VG4-NF-Cs
X.XX	±0.15	REV	A				
X.XXX	±0.10	UNIT	mm	APPD	DATE	SHEET	1/1
△	±2°	SCALE	3:1			PRINT DATE	2025.06.17