

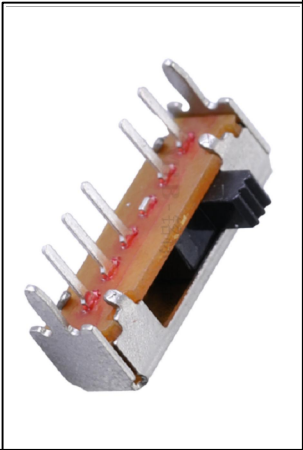
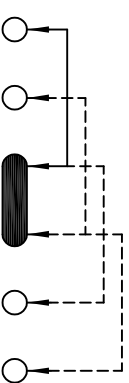
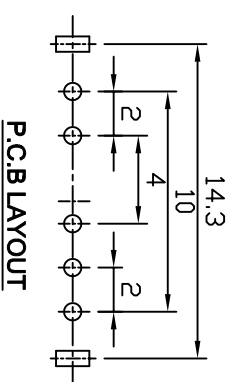
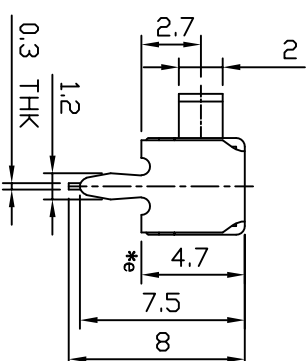


1	2	3	4	5
6	SPRING PLATE	PBS STRIP	1	NATURAL
5	CONTACT CLIP	PBS C5210R-EH	1	Ag CLAD
4	TERMINAL	BRASS STRIP	5	Ag PLATED
3	BASE	PHENOLIC RESIN	1	NATURAL
2	Knob	PA66	1	BLACK
1	FRAME	STEEL STRIP	1	Ni PLATED
NO.	PARTS	MATERIALS	Q'TY	

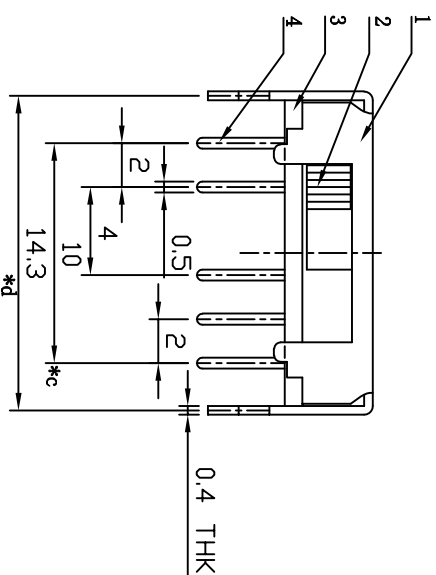

本公司智慧财产未经许可不得复制
ming biao copyright may not be used without permission from ming biao.

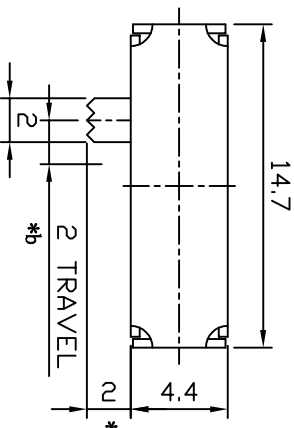

CIRCUIT

注：“*”表示关键尺寸(5个).

SPECIFICATIONS:

Operating temperature range:-16℃to+60℃
Rating:0.3A, 50V DC Max
Insulation resistance:100MΩ min, 500V DC
Dielectric strength:500V AC for 1Min
Contact resistance:50mΩ Max
Life:10, 000 Cycles
Travel:2.0mm
Operating force:250±100gf



R&D COMPLIANT Pb-free RoHS			Ming Biao Electronic Technology Co., Ltd.		
TOLERANCE			DESIGN	DATE	TITLE
UNLESS OTHERWISE STATED			WYJ	2024.08.31	HORIZONTAL SLIDE SWITCH
XX	±0.20	SIZE	A4	DATE	MODEL
XXX	±0.15	REV	A	DATE	SK14D02G2-NF-Cs
X,XXX	±0.10	UNIT	mm	DATE	
±	±2°	SCALE	3:1	DATE	
			APPD	DATE	
			SHEET	1/1	
			PRINT DATE	2025.02.12	