



1	2	3	4	5	6	7	8	9	10
7	STEEL BALL	STEEL	1	NATURAL	本公司智慧财产未经许可不得复制 ming biao copyright may not be used without permission from ming biao.				
6	SPRING	WIRE	1	NATURAL					
5	CONTACT CLIP	PBS C6210R-EH	2	Ag CLAD					
4	TERMINAL	BRASS STRIP	8	Ag PLATED					
3	BASE	PHENOLIC RESIN	1	NATURAL					
2	KNOB	POM	1	BLACK					
1	FRAME	STEEL STRIP	1	Ni PLATED					
B	NO. PARTS	MATERIALS	Q'TY	FINISH					

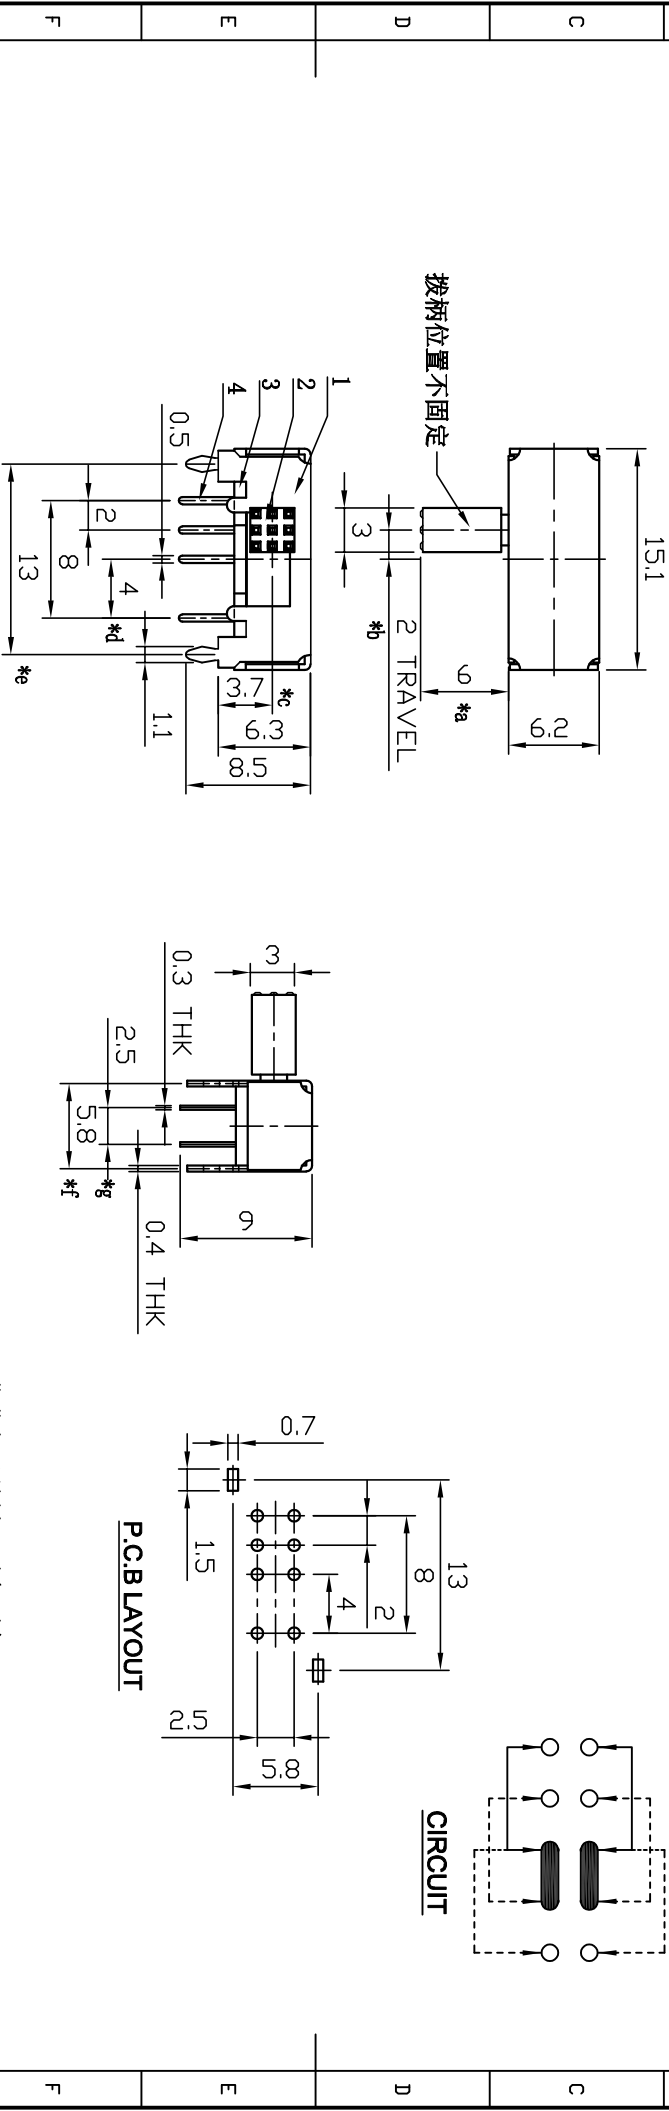

注：“*”表示关键尺寸(7个).

SPECIFICATIONS:

Operating temperature range:-16℃to+60℃
Rating:0.3A, 50V DC Max
Insulation resistance:100M Ω min, 500V DC
Dielectric strength:500V AC for 1Min
Contact resistance:50m Ω Max
Life:10, 000 Cycles
Travel:2.0mm
Operating force:250 $\pm$ 100gf/300 $\pm$ 150gf



ROHS COMPLIANT Pb-free HS RoHS Compliant	 东莞市铭标电子科技有限公司 Ming Biao Electronic Technology Co., Ltd.	
TOLERANCE	DESIGN	DATE
UNLESS OTHERWISE STATED	CHKD	DATE
XX	±0.20	SIZE
XX	±0.15	REV
X.XXX	±0.10	UNIT
X.XXX	±2°	SCALE
	2:1	
	APPD	DATE
	SHEET	1/1
	PRINT DATE	2025.02.12
	