

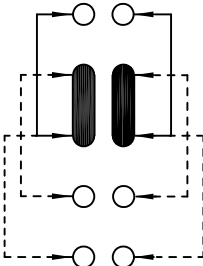

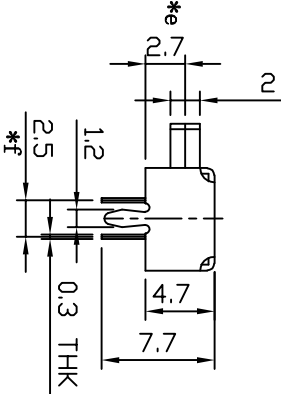


1	2	3	4	5
6 SPRING PLATE	PBS STRIP		1 NATURAL	
5 CONTACT CLIP	PBS C5210R-EH		2 Ag CLAD	
4 TERMINAL	BRASS STRIP		8 Ag PLATED	
3 BASE	PHENOLIC RESIN		1 NATURAL	
2 FRAME	STEEL STRIP		1 Ni PLATED	
1 KNOB	PA66		1 BLACK	
NO. PARTS	MATERIALS	Q'TY	FINISH	

本公司智慧财产未经许可不得复制
ming biao copyright may not be used without permission from ming biao.



CIRCUIT

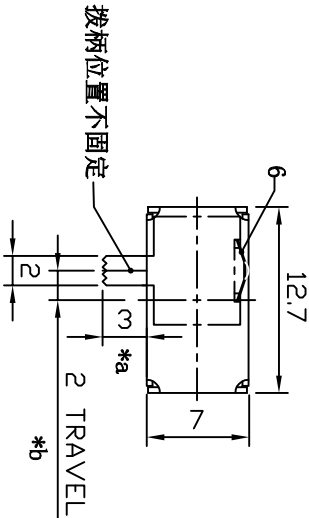

P.C.B LAYOUT

注：“*”表示关键尺寸(6个)

SPECIFICATIONS:

Operating temperature range:-16℃to+60℃
Rating:0.3A, 50V DC Max
Insulation resistance:100MΩ min, 500V DC
Dielectric strength:500V AC for 1Min
Contact resistance:50mΩ Max
Life:10, 000 Cycles
Travel:2.0mm
Operating force:250±100gf



ROHS COMPLIANT		Pb Free		HF		东莞市铭标电子科技有限公司 Ming Biao Electronic Technology Co., Ltd.	
TOLERANCE		DESIGN		DATE		TITLE	
UNLESS OTHERWISE STATED		CHKD		2024. 08. 31		HORIZONTAL SLIDE SWITCH	
XX	±0.20	SIZE	A4	DATE		MODEL	SK23D07G3-NF-Cs
XXX	±0.15	REV	A	DATE		SHEET	1/1
XXX	±0.10	UNIT	mm	APPD		PRINT DATE	2025.02.12
±	±2°	SCALE	2:1				