
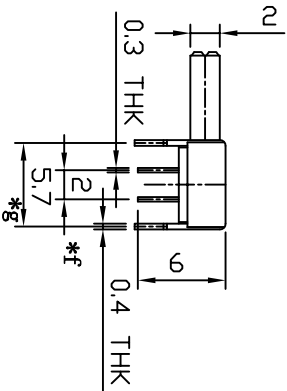
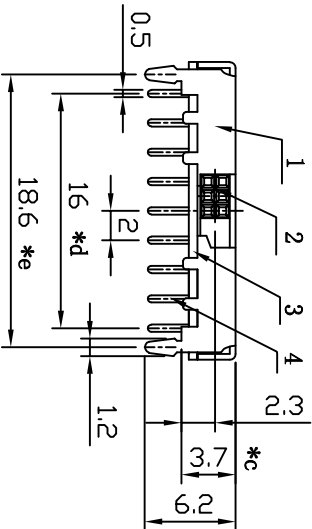
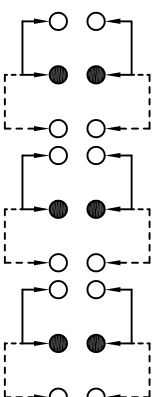
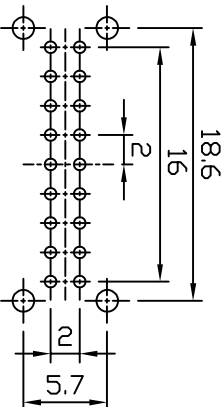
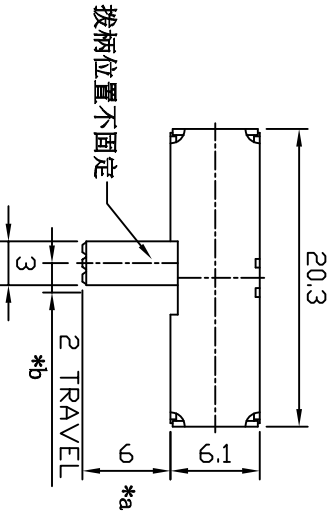


1	2	3	4	5
6	SPRING PLATE	SUS	1	NATURAL
5	CONTACT CLIP	PBS C5210R-EH	6	Ag CLAD
4	TERMINAL	BRASS STRIP	18	Ag PLATED
3	BASE	PHENOLIC RESIN	1	NATURAL
2	KNOB	PA66	1	BLACK
1	FRAME	STEEL STRIP	1	Ni PLATED
NO.	PARTS	MATERIALS	Q'TY	FINISH

本公司智慧财产未经许可不得复制
ming biao copyright may not be used without permission from ming biao.



注：“*”表示关键尺寸(7个).

SPECIFICATIONS:

Operating temperature range:-16℃to+60℃
Rating:0.3A, 50V DC Max
Insulation resistance:100M Ω min, 500V DC
Dielectric strength:500V AC for 1Min
Contact resistance:50m Ω Max
Life:10, 000 Cycles
Travel:2.0mm
Operating force:250 $\pm$ 100gf



RÖHS COMPLIANT Pb Pb-free HF RoHS-free				东莞市铭标电子科技有限公司 Ming Bao Electronic Technology Co., Ltd.				
TOLERANCE			DESIGN		DATE		TITLE	
UNLESS OTHERWISE STATED			9999		2024. 08. 31		HORIZONTAL SLIDE SWITCH	
X.X	±0.20	SIZE	A4	CHKD	DATE		MODEL	SK62D01PG6-NF
X.XX	±0.15	REV	A		DATE			
X.XXX	±0.10	UNIT	mm	APPD	DATE		SHEET	1/1
±2°	SCALE	2:1			PRINT DATE		2025.02.12	

东莞市铭标电子科技有限公司
Ming Biao Electronic Technology Co., Ltd.