







1	2	3	4	5
5	CONTACT CLIP	PBS C5210R-EH	1	Ag CLAD
4	TERMINAL	BRASS STRIP	3	Ag PLATED
3	BASE	PHENOLIC RESIN	1	NATURAL
2	FRAME	STEEL STRIP	1	NI PLATED
1	KNOB	PA66	1	BLACK
NO.	PARTS	MATERIALS	QTY	FINISH

本公司智慧财产未经许可不得复制
ming biao copyright may not be used without permission from ming biao.

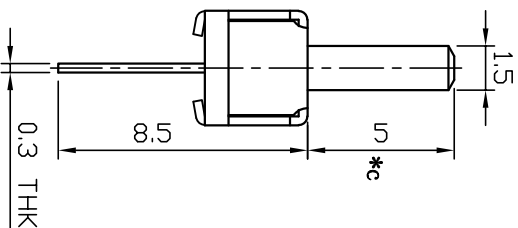

CIRCUIT

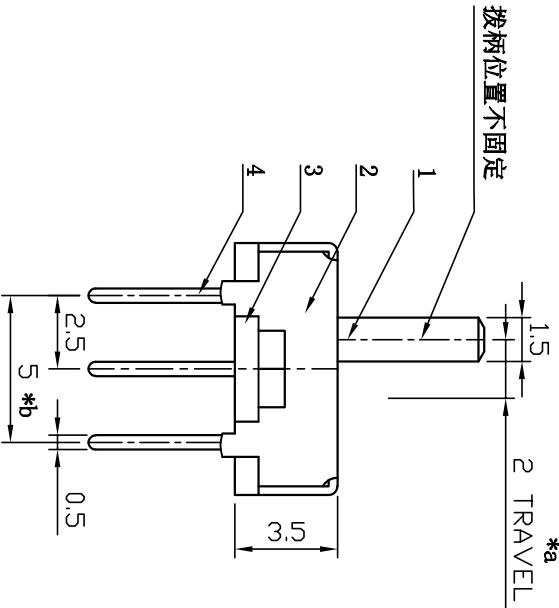

P.C.B LAYOUT

SPECIFICATIONS:

Operating temperature range:-20℃to+70℃
Rating:0.3A, 50V DC Max
Insulation resistance:100M Ω min, 500V DC
Dielectric strength:500V AC for 1min
Contact resistance:50m Ω Max
Life:10, 000 Cycles
Travel:2.0mm
Operating force:250 $\pm$ 100gf



R&D COMPLIANT		Pb-free		RoHS		Ming Biao		东莞市铭标电子科技有限公司	
TOLERANCE		DESIGN		DATE		TITLE		VERTICAL SLIDE SWITCH	
UNLESS OTHERWISE STATED		7/9		2024.08.31		MODEL		SS12D01G5-NF-Cs	
XX	± 0.20	SIZE	A4	DATE		SHEET		1/1	
XXX	± 0.15	REV	A	DATE		PRINT DATE		2025.02.12	
X,XXX	± 0.10	UNIT	mm	APPD		DATE			
	$\pm 2^\circ$	SCALE	4:1						