

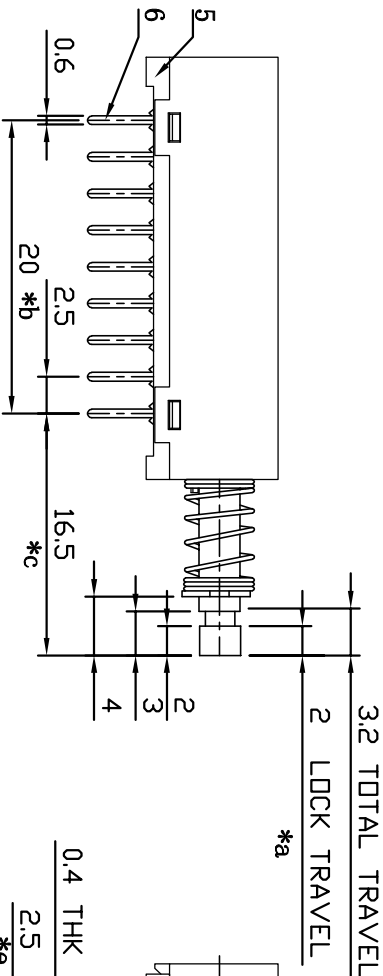


1	2	3	4	5
9	SPRING PLATE	PBS STRIP	1	NATURAL
8	CONTACT CLIP	PBS C5210R-EH	6	Ag CLAD
7	CAM STICK	BRASS WIRE	1	Ni PLATED
6	TERMINAL	BRASS STRIP	18	Ag PLATED
5	BASE	PPA	1	BLACK
4	COVER	PC	1	BLUE
3	SPRING	STEEL WIRE	1	Ni PLATED
2	BLOCK	STEEL STRIP	1	Ni PLATED
1	KNOB	PA66	1	BLACK
NO.	PARTS	MATERIALS	Q'TY	FINISH

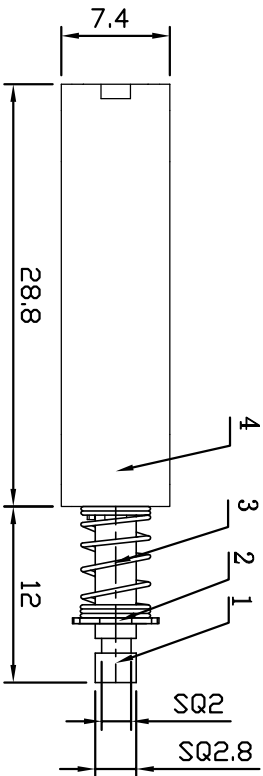

注：“*”表示关键尺寸(5个).

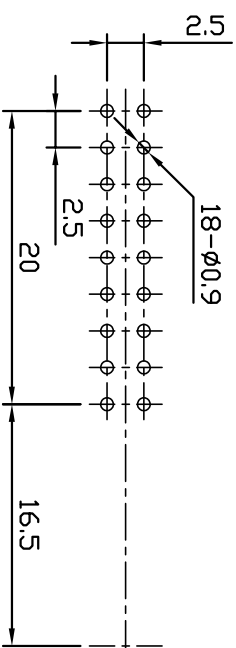

P.C.B LAYOUT

SPECIFICATIONS:

Operating temperature range:-16℃to+60℃
Rating:0.3A, 50V DC Max
Insulation resistance:100MΩ min, 500V DC
Dielectric strength:500V AC for 1Min
Contact resistance:50mΩ Max
Life:10, 000 Cycles
Travel:3.2mm
Operating force:400±100gf



RoHS COMPLIANT Pb Pb-free HF RoHS Compliant				 东莞市铭标电子科技有限公司 Ming Biao Electronic Technology Co., Ltd.			
TOLERANCE				DESIGN	DATE	TITLE	PLASTIC PUSH SWITCH
UNLESS OTHERWISE STATED				WYJ	2024. 08. 30		
X.X	±0.20	SIZE	A4	CHKD	DATE	MODEL	PBS-62D02
X.XX	±0.15	REV	A				
X,XXX	±0.10	UNIT	mm	APPD	DATE	SHEET	1/1
✓	±2°	SCALE	2:1			PRINT DATE	2025.02.12
							

本公司智慧财产未经许可不得复制
ming biao copyright may not be used without permission from ming biao.



CIRCUIT

