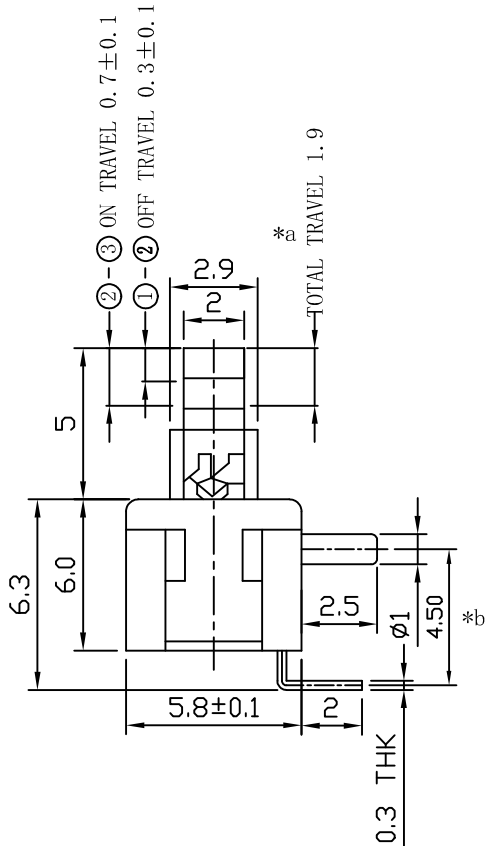
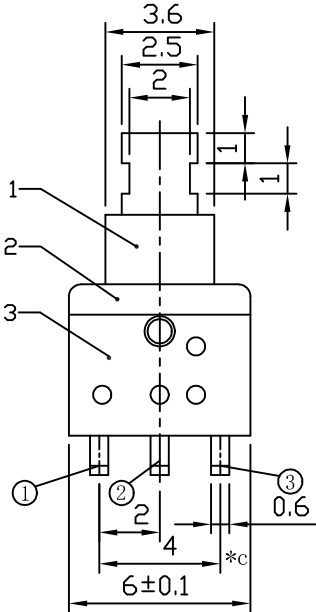

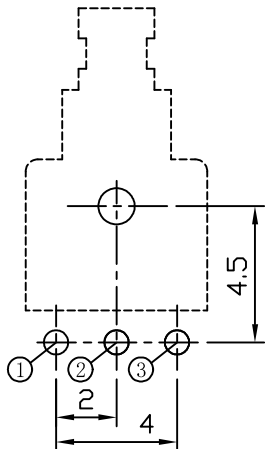



	1	2	3	4	5	6	7	8	9	10																																																		
A	4	SPRING 弹弓	SUS 不锈钢线	1	NATURAL	本公司智慧财产未经许可不得复制 ming biao copyright,may not be used without permission from ming biao.																																																						
	3	CASE 胶座	PA66/BRASS STRIP PA66/青铜	1	GREY/Ag PLATED																																																							
	2	COVER 胶盖	PA66 PA66	1	BLACK																																																							
	1	KNOB 胶头	PBT/PBS C5210R-EH PBT/磷铜	1	WHITE/Ag CLAD																																																							
	NO.	PARTS	MATERIALS	Q' TY	FINISH																																																							
B																																																												
C																																																												
D																																																												
E																																																												
F											 CIRCUIT																																																	
G						 P.C.B LAYOUT																																																						
H	SPECIFICATIONS: Operating temperature range:-16℃to+60℃ Rating:0.2A.12V DC Max Insulation resistance:100MΩ min.500V DC Dielectric strength:500V AC for 1Min Contact resistance:70mΩ Max Life:1,000, 000 Cycles Operating force:200±50gf																																																											
						   东莞市铭标电子科技有限公司 Ming Biao Electronic Technology Co.,Ltd. <table><tr><td colspan="2">TOLERANCE</td><td>DESIGN</td><td>DATE</td><td>TITLE</td><td colspan="2">PUSH SWITCH</td></tr><tr><td colspan="2">UNLESS OTHERWISE STATED</td><td>WY</td><td>2025. 11. 24</td><td></td><td colspan="2"></td></tr><tr><td>X.X</td><td>±0.20</td><td>SIZE</td><td>A4</td><td>CHKD</td><td>DATE</td><td></td></tr><tr><td>X.XX</td><td>±0.15</td><td>REV</td><td>A</td><td></td><td>MODEL</td><td>PB12E645-NF-L</td></tr><tr><td>X.XXX</td><td>±0.10</td><td>UNIT</td><td>mm</td><td>APPD</td><td>DATE</td><td></td></tr><tr><td>∠</td><td>±2°</td><td>SCALE</td><td>4:1</td><td></td><td>SHEET</td><td>1/1</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td>PRINT DATE</td><td>2025.11.24</td></tr></table> 						TOLERANCE		DESIGN	DATE	TITLE	PUSH SWITCH		UNLESS OTHERWISE STATED		WY	2025. 11. 24				X.X	±0.20	SIZE	A4	CHKD	DATE		X.XX	±0.15	REV	A		MODEL	PB12E645-NF-L	X.XXX	±0.10	UNIT	mm	APPD	DATE		∠	±2°	SCALE	4:1		SHEET	1/1						PRINT DATE	2025.11.24
TOLERANCE		DESIGN	DATE	TITLE	PUSH SWITCH																																																							
UNLESS OTHERWISE STATED		WY	2025. 11. 24																																																									
X.X	±0.20	SIZE	A4	CHKD	DATE																																																							
X.XX	±0.15	REV	A		MODEL	PB12E645-NF-L																																																						
X.XXX	±0.10	UNIT	mm	APPD	DATE																																																							
∠	±2°	SCALE	4:1		SHEET	1/1																																																						
					PRINT DATE	2025.11.24																																																						