


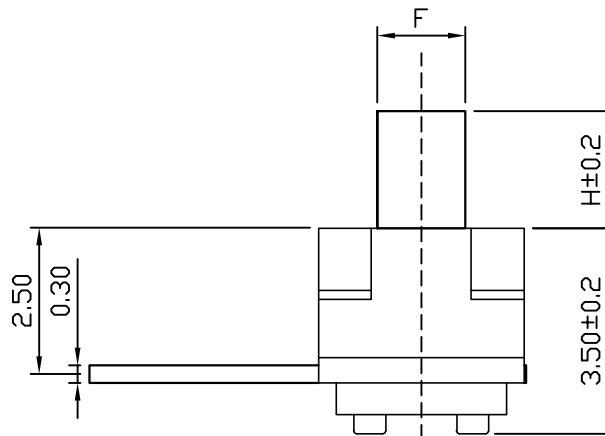
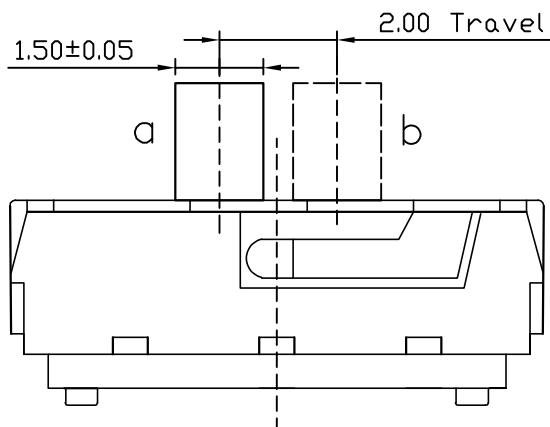
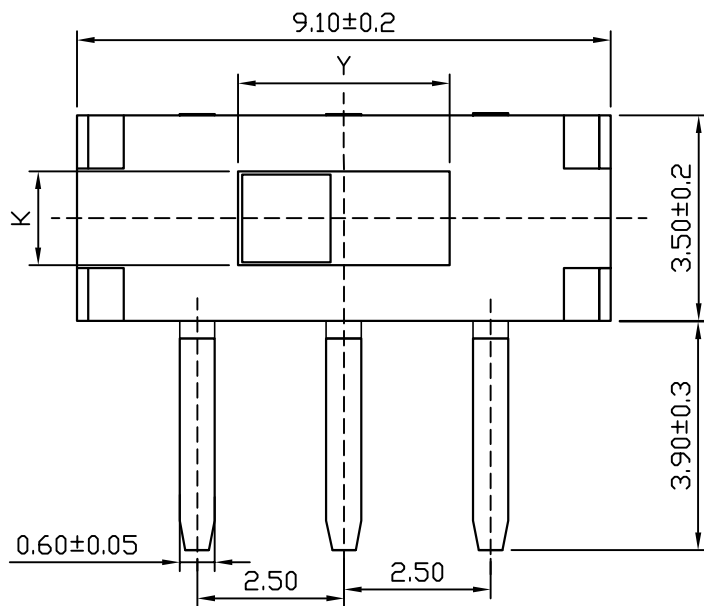


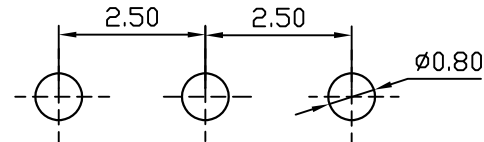

本公司智慧财产未经许可不得复制
ming biao copyright, may not be used without permission from ming biao.

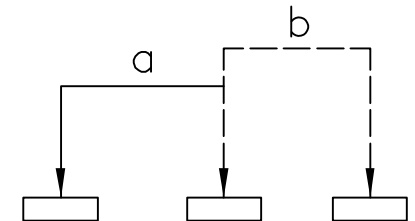

P.C.B LAYOUT

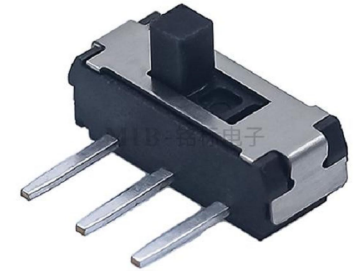

CIRCUIT

SPECIFICATIONS:

Operating temperature range: -10℃ to +50℃
Rating: 100mA, 12V DC Max
Insulation resistance: 50MΩ min. 100V DC
Dielectric strength: 250V, AC, 1Min
Contact resistance: 100mΩ Max
Life: 10,000 Cycles
Travel: 2±0.2mm
Operating force: 200±50gf

手柄尺寸			
F	K	Y	
2.0	1.5	1.6	
3.0	2.0	2.1	
4.0	2.5	2.6	



ROHS COMPLIANT				Pb-Free				Halogen Free				东莞市铭标电子科技有限公司			
TOLERANCE				DESIGN				DATE				TITLE			
UNLESS OTHERWISE STATED				WYJ				2024. 01. 03				Slide Switch			
X.X	±0.20	SIZE	A4	CHKD				DATE				MODEL			
X.XX	±0.15	REV	A	APPD				DATE				SHEET			
X.XXX	±0.10	UNIT	mm									1/3			
≤	±2°	SCALE	8:1					PRINT DATE				2025.02.11			