
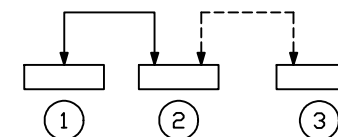
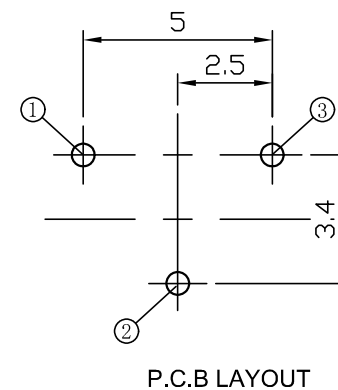
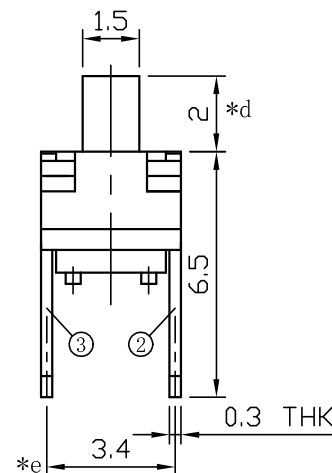
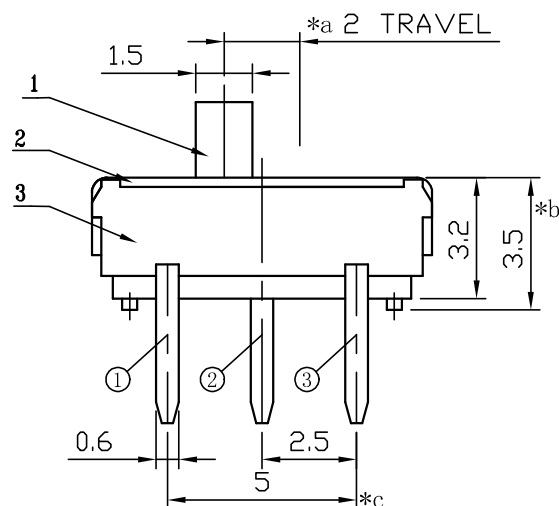
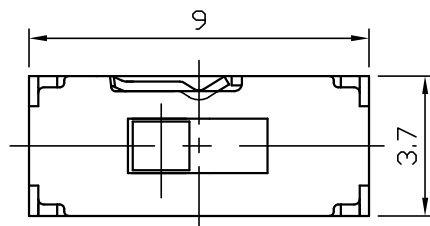


1		2	3		4
4	CONTACT	PBS WIRE		1	Ag PLATED
3	CASE/TERMINAL	PPA/BRASS STRIP		1	BLACK/Ag PLATED
2	COVER	SUS		1	NATURAL
1	KNOB	PPA		1	BLACK
NO.	PARTS	MATERIALS		Q' TY	FINISH

本公司智慧财产未经许可不得复制
ming biao copyright,may not be used without permission from ming biao.



CIRCUIT

SPECIFICATIONS:

Operating temperature range:-10°Cto+80°C
Rating:10mA,12V DC Max
Insulation resistance:100M Ω min.500V DC
Dielectric strength:500V AC for 1Min
Contact resistance:50m Ω Max
Life:5,000 Cycles
Travel:2.0mm
Operating force:200 $\pm$ 80gf



 东莞市铭标电子科技有限公司 Ming Biao Electronic Technology Co., Ltd								
TOLERANCE				DESIGN	DATE	TITLE	MINI SLIDE SWITCH	
UNLESS OTHERWISE STATED				WYJ	2024. 08. 27			
X.X	±0.20	SIZE	A4	CHKD	DATE	MODEL	MS12D16G2-B 弹线	
X.XX	±0.15	REV	A					
X.XXX	±0.10	UNIT	mm	APPD	DATE	SHEET	1/1	
	±2°	SCALE	5:1			PRINT DATE	2025.06.11	

