
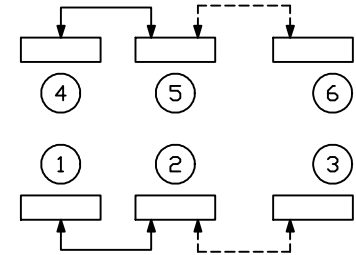
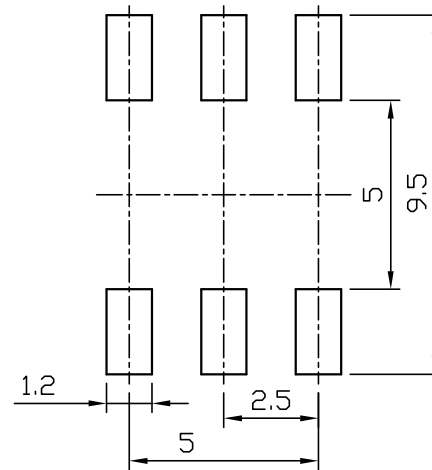
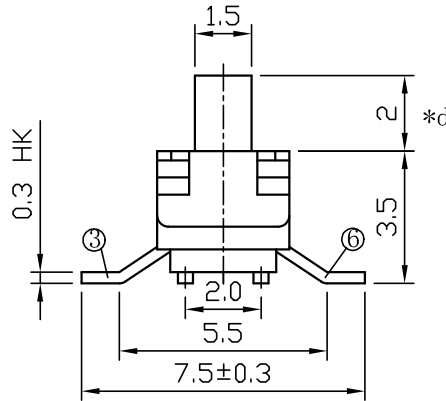
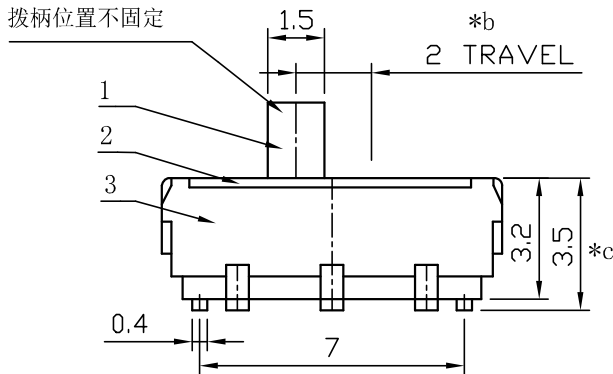


	1	2	3	4	5	6	7	8	9	10
4	CONTACT	PBS WIRE	2	Ag PLATED						
3	CASE/TERMINAL	PPA/BRASS STRIP	1	BLACK/Ag PLATED						
2	COVER	SUS	1	NATURAL						
1	KNOB	PPA	1	BLACK						
NO.	PARTS	MATERIALS	Q' TY	FINISH						

本公司智慧财产未经许可不得复制
ming biao copyright,may not be used without permission from ming biao.

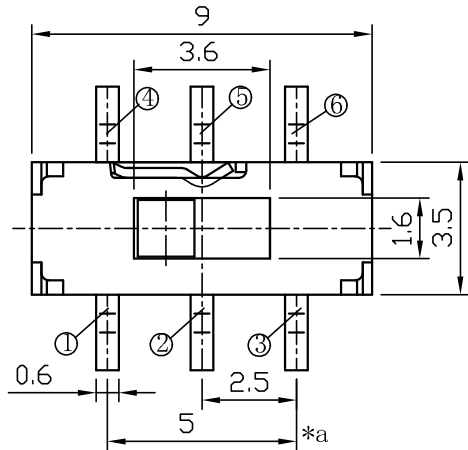


CIRCUIT

注：“*”表示关键尺寸(4个).

SPECIFICATIONS:

Operating temperature range:-20℃to+70℃
Rating:0.3A.6V DC Max
Insulation resistance:100MΩ min.500V DC
Dielectric strength:500V AC for 1Min
Contact resistance:70mΩ Max
Life:5,000 Cycles
Travel:2.0mm
Operating force:200±80gf



  				东莞市铭标电子科技有限公司 Ming Biao Electronic Technology Co., Ltd.							
TOLERANCE				DESIGN		DATE		TITLE	MINI SLIDE SWITCH		
UNLESS OTHERWISE STATED				wyy		2024.08.28					
X.X	±0.20	SIZE	A4	CHKD		DATE		MODEL	MS22D17G2-B弹线		
X.XX	±0.15	REV	A								
X.XXX	±0.10	UNIT	mm	APPD		DATE		SHEET		1/1	
	±2°	SCALE	5:1					PRINT DATE		2025.06.13	