
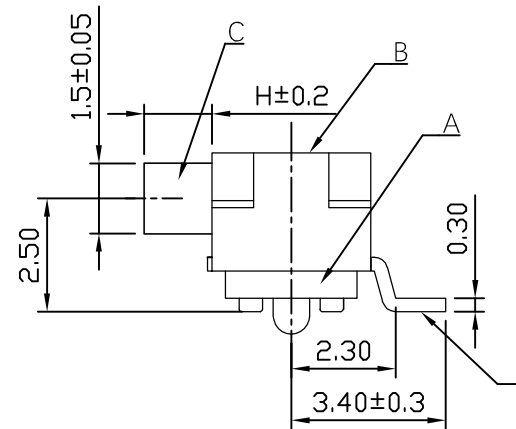


Code	H
A1	2.0
A2	3.0
A3	4.0

SPECIFICATIONS:

Operating temperature range:-10℃to+50℃
Rating:100mA.12V DC Max
Insulation resistance:50MΩ min.100V DC
Dielectric strength:250V.AC.1Min
Contact resistance:100mΩ Max
Life:10,000 Cycles
Travel:2.0±0.2mm
Operating force:180±50gf

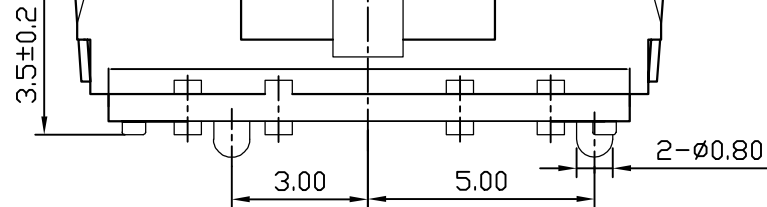

E	Terminal	4	Brass	Silver
D	Contact reed	1	Beryllium copper	Silver covere
C	Handle	1	PA46	Black
B	Cover	1	SUS	Silver
A	Base	1	PA46	Black
NO	Name	Qty	Materil	Remarks



 东莞市铭标电子科技有限公司
Ming Biao Electronic Technology Co., Ltd.

				DESIGN	DATE	TITLE	Toggle switch	
TOLERANCE				WJF	2024. 06. 19			
UNLESS OTHERWISE STATED								
X.X	±0.20	SIZE	A4	CHKD	DATE	MODEL	QHCM05-N-R	
X.XX	±0.15	REV	A					
X.XXX	±0.10	UNIT	mm	APPD	DATE	SHEET	1/3	
	±2°	SCALE	6:1					