

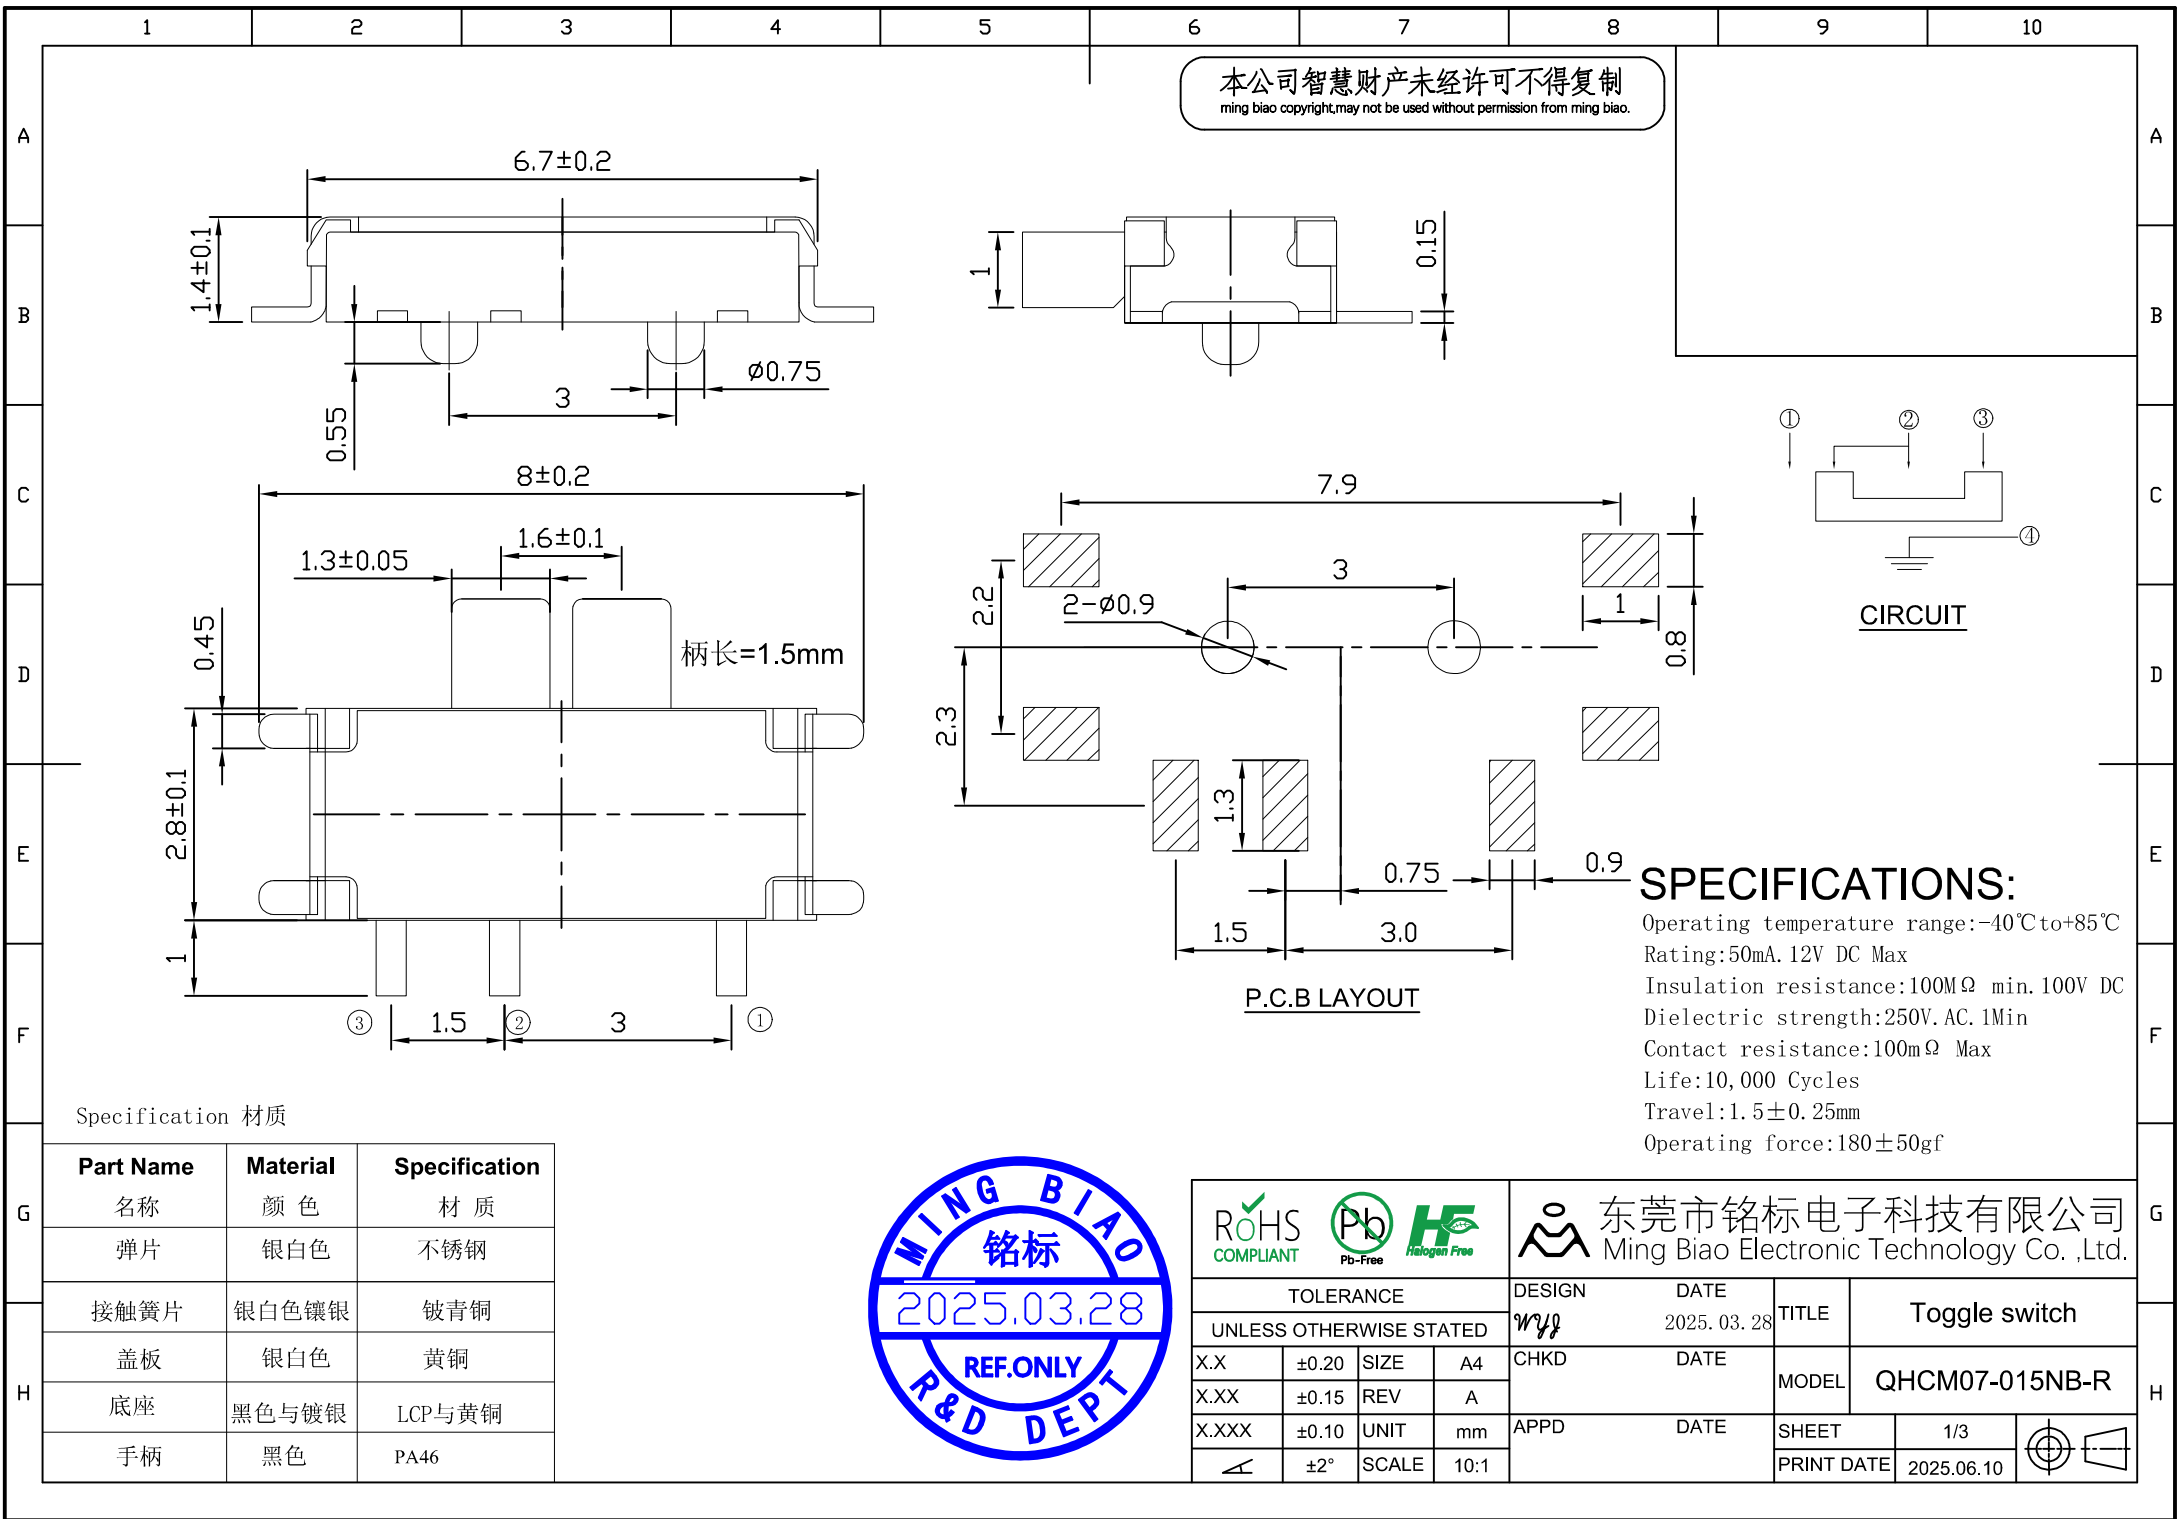


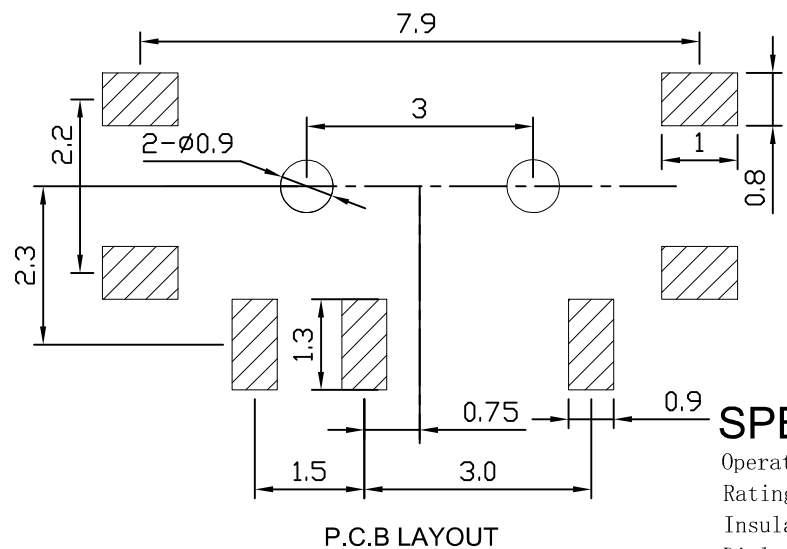

本公司智慧财产未经许可不得复制
ming biao copyright, may not be used without permission from ming biao.




SPECIFICATIONS:
Operating temperature range: -40°C to +85°C
Rating: 50mA, 12V DC Max
Insulation resistance: 100MΩ min, 100V DC
Dielectric strength: 250V, AC, 1Min
Contact resistance: 100mΩ Max
Life: 10,000 Cycles
Travel: 1.5±0.25mm
Operating force: 180±50gf

Specification 材质

Part Name	Material	Specification
名称	颜色	材质
弹片	银白色	不锈钢
接触簧片	银白色镀银	铍青铜
盖板	银白色	黄铜
底座	黑色与镀银	LCP与黄铜
手柄	黑色	PA46



RoHS COMPLIANT Pb Pb-Free HF Halogen Free				 东莞市铭标电子科技有限公司 Ming Biao Electronic Technology Co., Ltd.				
TOLERANCE				DESIGN	DATE	TITLE	Toggle switch	
UNLESS OTHERWISE STATED				wyf	2025. 03. 28			
X.X	±0.20	SIZE	A4	CHKD	DATE	MODEL	QHCM07-015NB-R	
X.XX	±0.15	REV	A					
X.XXX	±0.10	UNIT	mm	APPD	DATE	SHEET	1/3	
	±2°	SCALE	10:1			PRINT DATE	2025.06.10	