


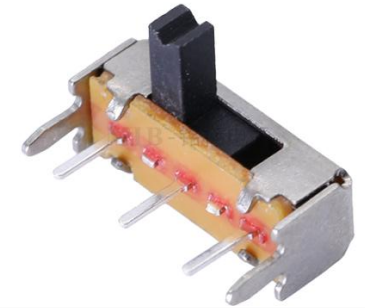
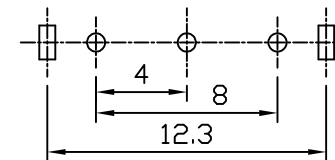
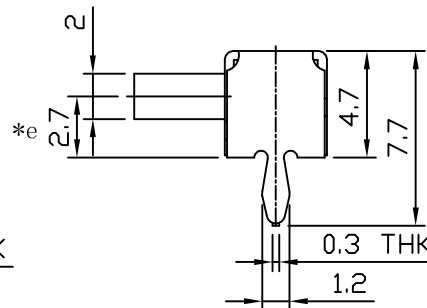


1		2		3		4		5	
6	SPRING PLATE	PBS STRIP			1	NATURAL			
5	CONTACT CLIP	PBS C5210R-EH			1	Ag CLAD			
4	TERMINAL	BRASS STRIP			3	Ag PLATED			
3	BASE	PHENOLIC RESIN			1	NATURAL			
2	KNOB	PA66			1	BLACK			
1	FRAME	STEEL STRIP			1	Ni PLATED			
NO.	PARTS	MATERIALS			Q'TY	FINISH			

本公司智慧财产未经许可不得复制
ming biao copyright,may not be used without permission from ming biao.

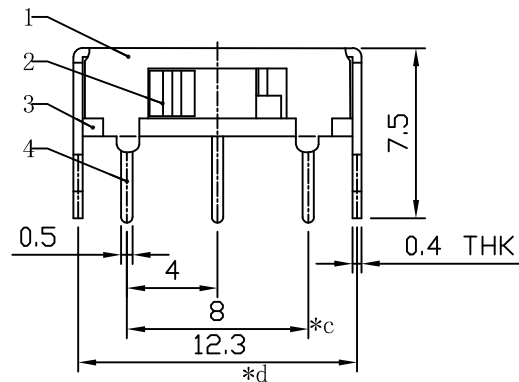

CIRCUIT

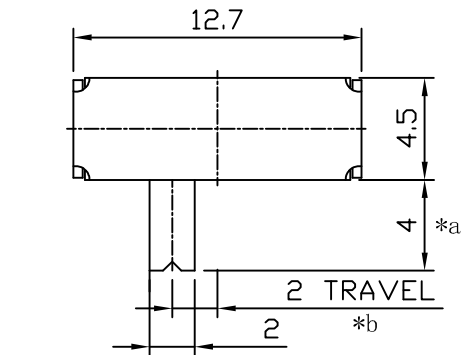

P.C.B LAYOUT

注: "*"表示关键尺寸(5个).

SPECIFICATIONS:

Operating temperature range:-16°Cto+60°C
Rating:0.3A,50V DC Max
Insulation resistance:100M Ω min.500V DC
Dielectric strength:500V AC for 1Min
Contact resistance:50m Ω Max
Life:10,000 Cycles
Travel:2.0mm
Operating force:250 $\pm$ 100gf



  				 东莞市铭标电子科技有限公司 Ming Biao Electronic Technology Co., Ltd.				
TOLERANCE				DESIGN	DATE	TITLE	HORIZONTAL SLIDE SWITCH	
UNLESS OTHERWISE STATED				WYF	2024. 08. 30			
X.X	±0.20	SIZE	A4	CHKD	DATE	MODEL	SK13D02VG4-NF-Cs	
X.XX	±0.15	REV	A					
X.XXX	±0.10	UNIT	mm	APPD	DATE	SHEET	1/1	
	±2°	SCALE	3:1			PRINT DATE	2025.06.17	

