


	1	2	3	4	5	6	7	8	9	10
A	6	SPRING PLATE	SUS	1	NATURAL	本公司智慧财产未经许可不得复制 ming biao copyright,may not be used without permission from ming biao.				
	5	CONTACT CLIP	PBS C5210R-EH	1	Ag (8u) CLAD					
	4	TERMINAL	BRASS STRIP	6	Ag (8u) PLATED					
	3	BASE	PHENOLIC RESIN	1	NATURAL					
	2	KNOB	PPA	1	BLACK					
	1	FRAME	STEEL STRIP	1	Ni (40u) PLATED					
	NO.	PARTS	MATERIALS	Q' TY						



SPECIFICATIONS:

Operating temperature range:-16℃to+60℃
Rating:0.2A.120V DC Max
Insulation resistance:100MΩ min.500V DC
Dielectric strength:500V AC for 1Min
Contact resistance:50mΩ Max
Life:10,000 Cycles
Travel:2.0mm
Operating force:350±150gf

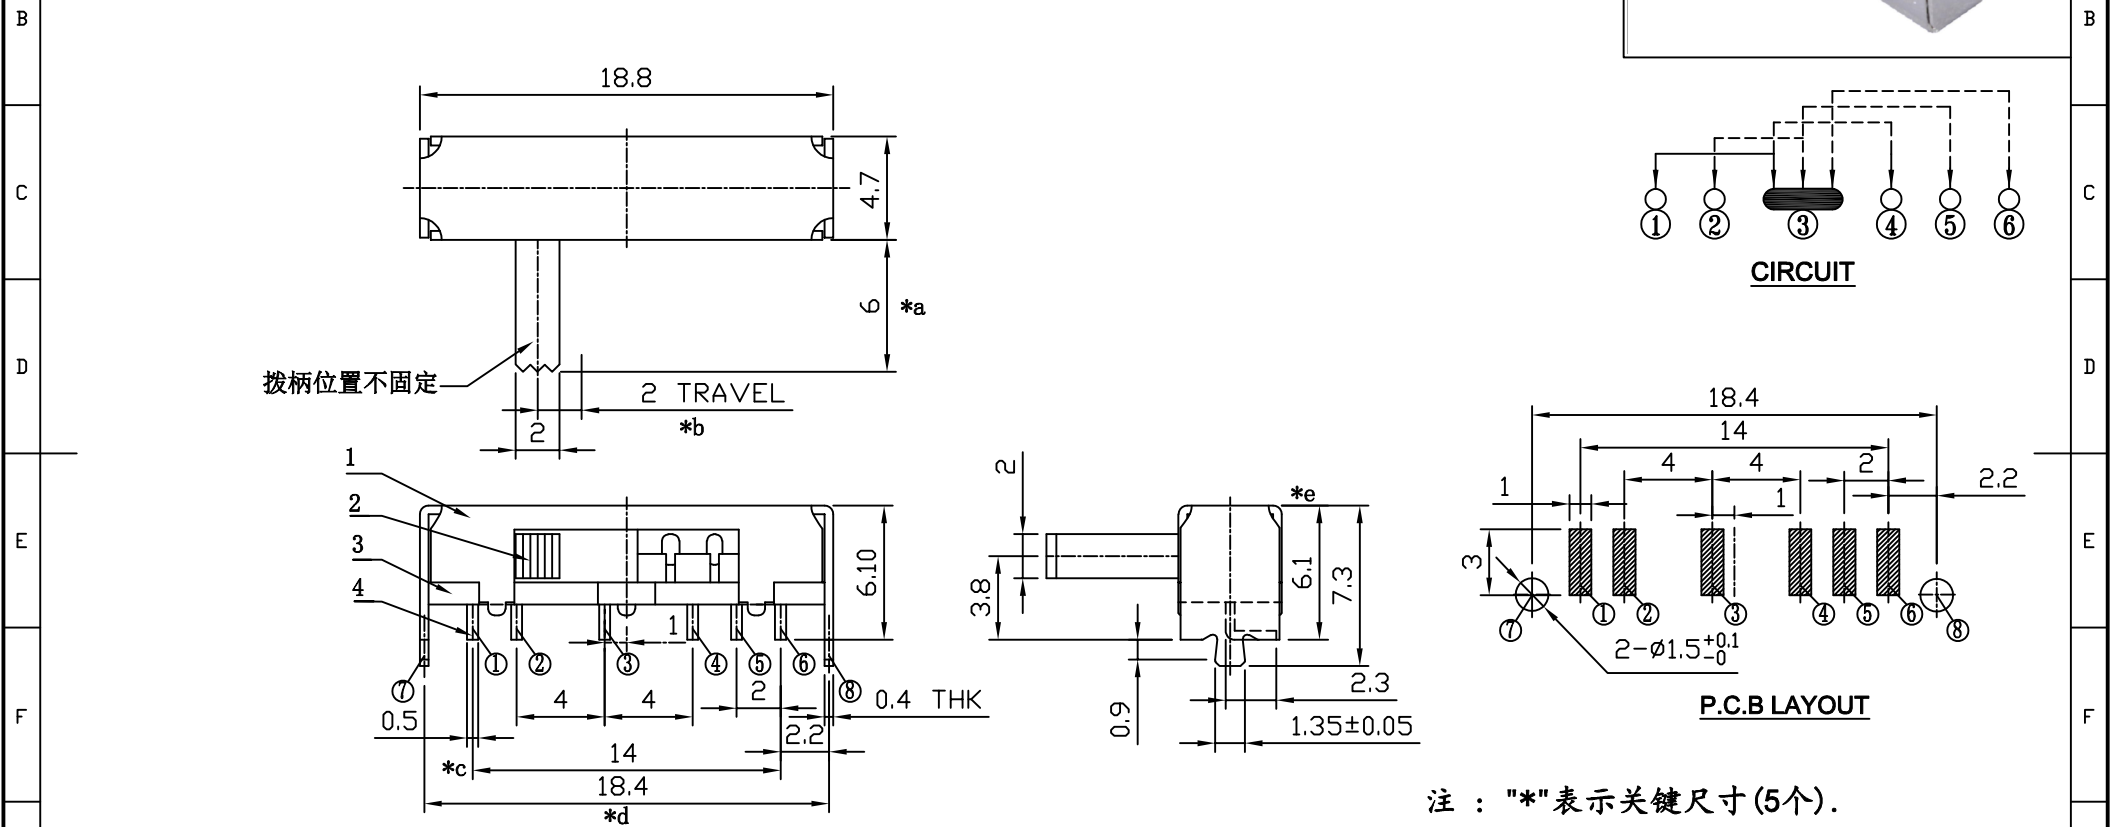

						 东莞市铭标电子科技有限公司 Ming Biao Electronic Technology Co.,Ltd.			
TOLERANCE		DESIGN		DATE		TITLE		HORIZONTAL SLIDE SWITCH	
UNLESS OTHERWISE STATED		WYJ		2024.08.31					
X.X	±0.20	SIZE	A4	CHKD	DATE	MODEL		SK15D02G6-PPA-Cs-N-RD	
X.XX	±0.15	REV	A			SHEET		1/1	
X.XXX	±0.10	UNIT	mm	APPD	DATE	PRINT DATE		2025.02.12	
∠	±2°	SCALE	3:1					