




本公司智慧财产未经许可不得复制
ming biao copyright may not be used without permission from ming biao.




CIRCUIT




垂直方向操作位置 0.85

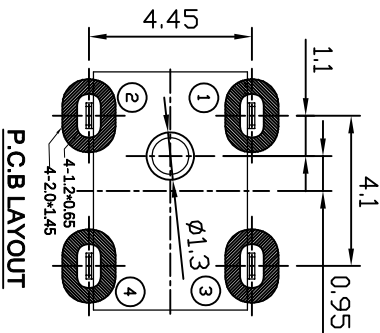

PCB LAYOUT

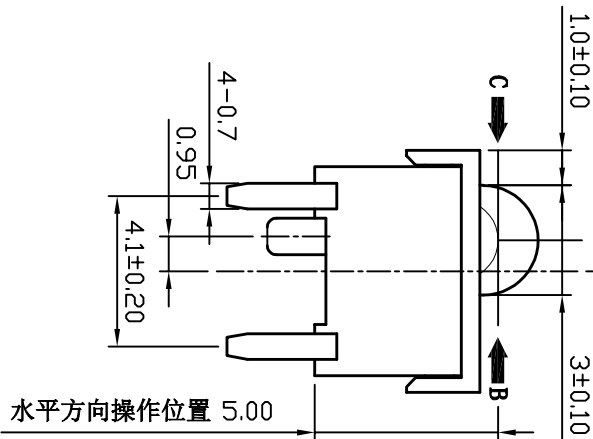

水平方向操作位置 5.00

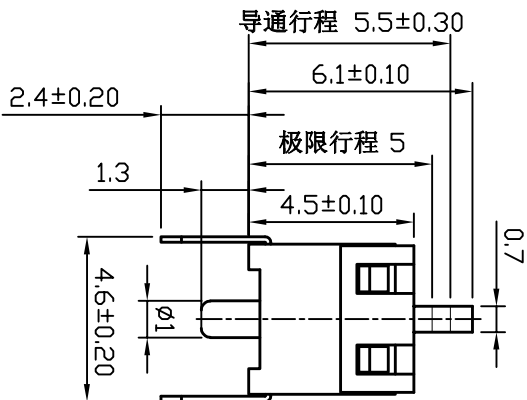

导通行程 5.5±0.30

极限行程 5

SPECIFICATIONS:

Operating temperature range: -10°C to +60°C
Rating: Max 50mA 16V DC
Insulation resistance: 50MΩ min. 100V DC
Dielectric strength: 250V AC 1Min
Contact resistance: 200mΩ Max
Life: 20,000 Cycles
Operating force: 30±10gf Max



R&D DEPT				2024.06.15				铭标			
COMPLIANT				Pb-free				RoHS			
TOLERANCE				DESIGN				DATE			
UNLESS OTHERWISE STATED				CHKD				DATE			
XX				XX				DATE			
XX				XX				DATE			
X.XXX				X.XXX				DATE			
±2°				SCALE				5:1			
APPD				DATE				DATE			
SHEET				MODEL				LM-V-104R			
PRINT DATE				2025.02.11				1/3			
PRINT DATE				2025.02.11				1/3			

东莞市铭标电子科技有限公司
Ming Biao Electronic Technology Co., Ltd.

Detector Switch