

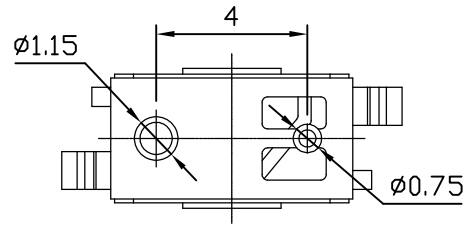

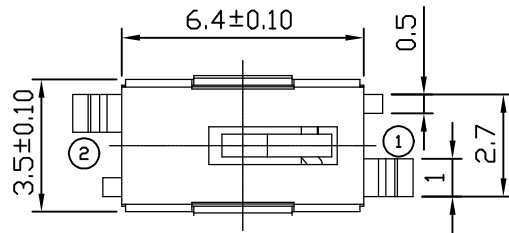



本公司智慧财产未经许可不得复制
ming biao copyright, may not be used without permission from ming biao.

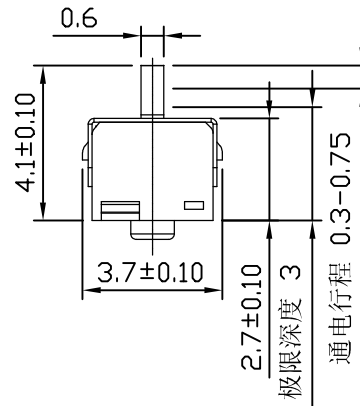

垂直方向操作位置 0.65 ± 0.50

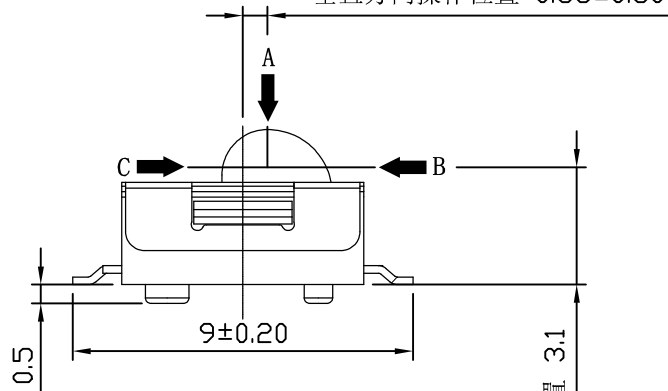

水平方向操作位置 3.1

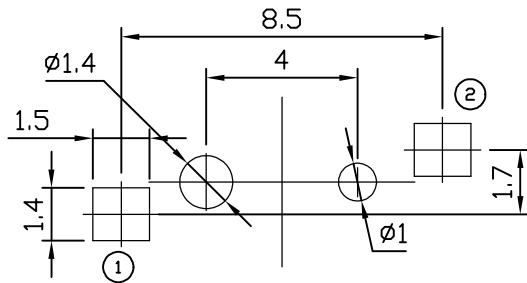

P.C.B LAYOUT

SPECIFICATIONS:

Operating temperature range: -10°C to $+60^{\circ}\text{C}$

Rating: Max 500mA 16V DC

Insulation resistance: $50\text{M}\Omega$ min. 250V DC

Dielectric strength: 250V. AC. 1min

Contact resistance: $200\text{m}\Omega$ Max

Life: 50,000 Cycles

Operating force: $30 \pm 10\text{gf}$ Max



  				 东莞市铭标电子科技有限公司 Ming Biao Electronic Technology Co., Ltd.							
TOLERANCE				DESIGN		DATE		TITLE		Detector Switch	
UNLESS OTHERWISE STATED				WY		2024. 06. 13					
X.X	±0.20	SIZE	A4	CHKD		DATE		MODEL		LM-V-105S-2-T	
X.XX	±0.15	REV	A								
X.XXX	±0.10	UNIT	mm	APPD		DATE		SHEET		1/3	
	±2°	SCALE	5:1					PRINT DATE		2025.06.14	
											