


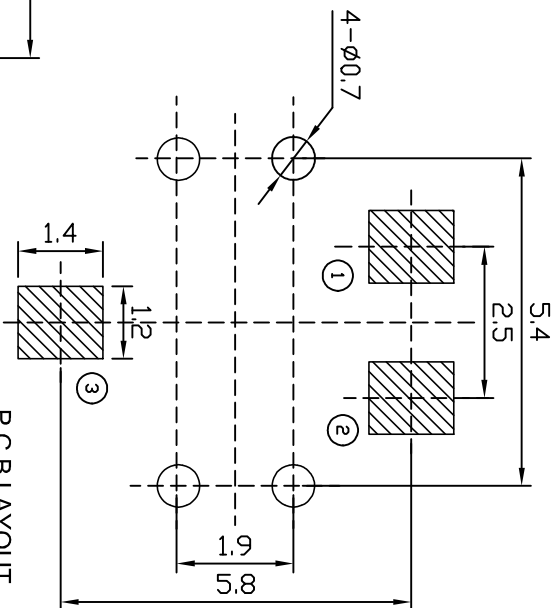
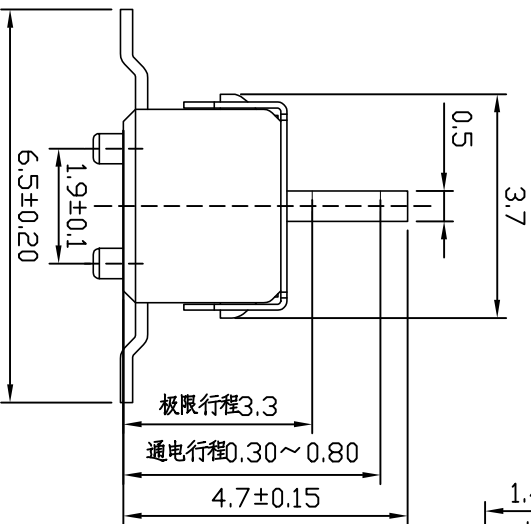


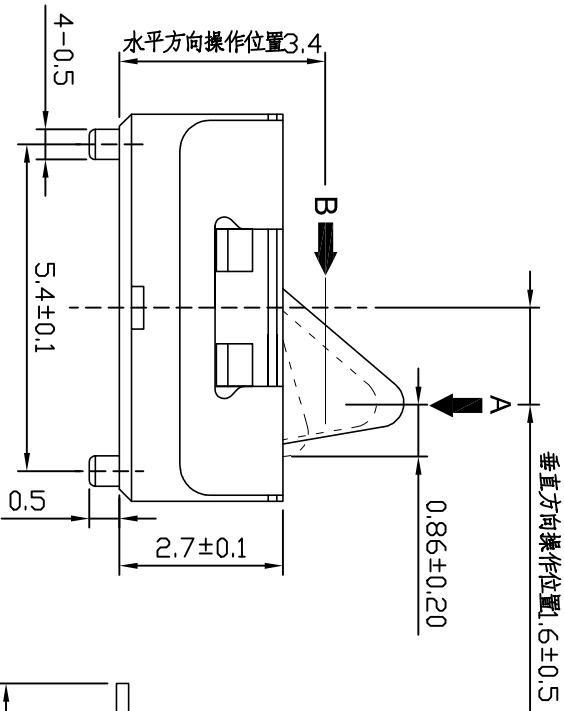

P.C.B LAYOUT

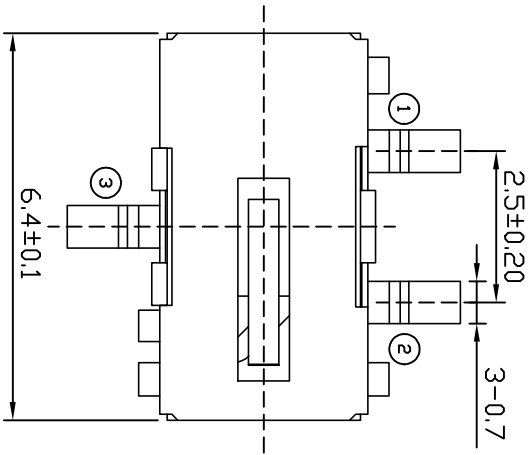

CIRCUIT



本公司智慧财产未经许可不得复制
ming biao copyright may not be used without permission from ming biao.

SPECIFICATIONS:

Operating temperature range: -10°C to +60°C
Rating: Max 500mA 16V DC
Insulation resistance: 50MΩ min. 250V DC
Dielectric strength: 250V.AC. 1Min
Contact resistance: 200mΩ Max
Life: 100,000 Cycles
Operating force: 30±10gf Max



东莞市铭标电子科技有限公司
Ming Biao Electronic Technology Co., Ltd.



TOLERANCE				DESIGN	DATE	TITLE
UNLESS OTHERWISE STATED				WYJ	2024.06.13	Detector Switch
X.X	±0.20	SIZE	A4	CHKD	DATE	MODEL
X.XX	±0.15	REV	A			LM-V-105S-36
X.XXX	±0.10	UNIT	mm	APPD	DATE	SHEET
	±2°	SCALE	8:1			1/3
					PRINT DATE	2025.06.14