

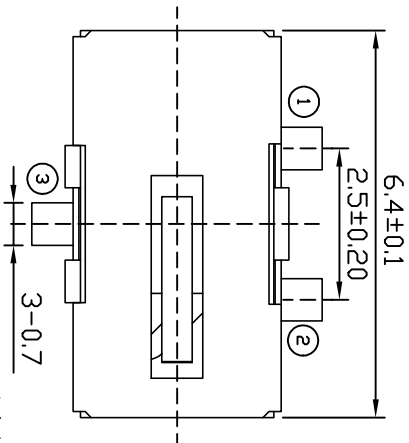


本公司智慧财产未经许可不得复制
ming biao copyright may not be used without permission from ming biao.


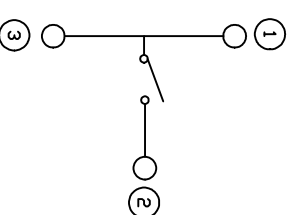


垂直方向操作位置1.6±0.5

P.C.B LAYOUT

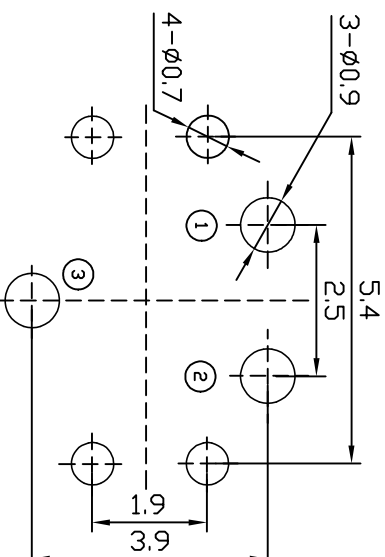

CIRCUIT

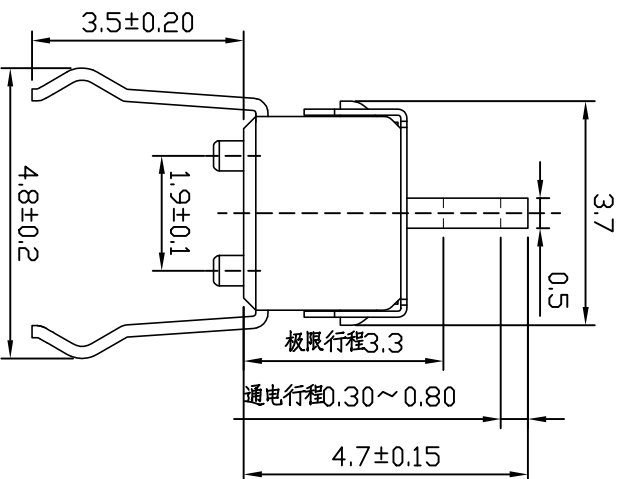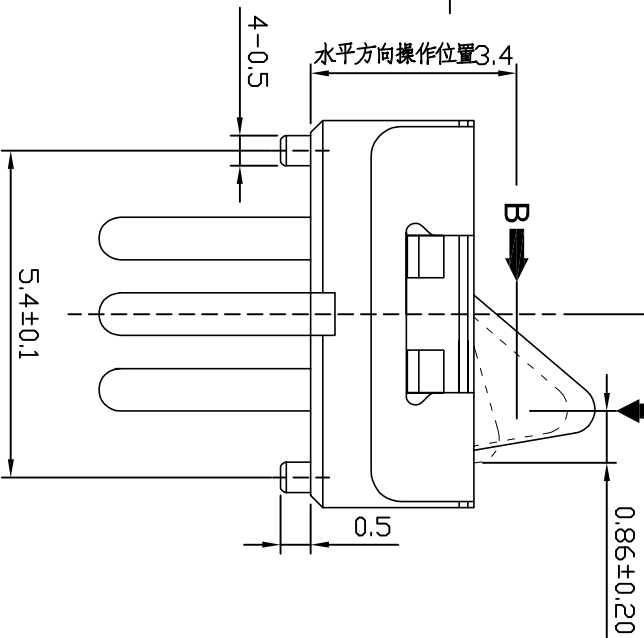

SPECIFICATIONS:

Operating temperature range: -10°C to +60°C
Rating: Max 500mA 16V DC
Insulation resistance: 50MΩ min. 250V DC
Dielectric strength: 250V AC, 1Min
Contact resistance: 200mΩ Max
Life: 50,000 Cycles
Operating force: 30±10gf Max

东莞市铭标电子科技有限公司
Ming Biao Electronic Technology Co., Ltd.



TOLERANCE

UNLESS OTHERWISE STATED

X.X ±0.20 SIZE A4

X.XX ±0.15 REV A

X.XXX ±0.10 UNIT mm

±2° SCALE 8:1

DESIGN DATE

CHKD DATE

MODEL

DATE

APPD DATE

PRINT DATE

Detector Switch

LM-V-105S 插件

1/3

2025.06.14

