


本公司智慧财产未经许可不得复制
ming biao copyright may not be used without permission from ming biao.

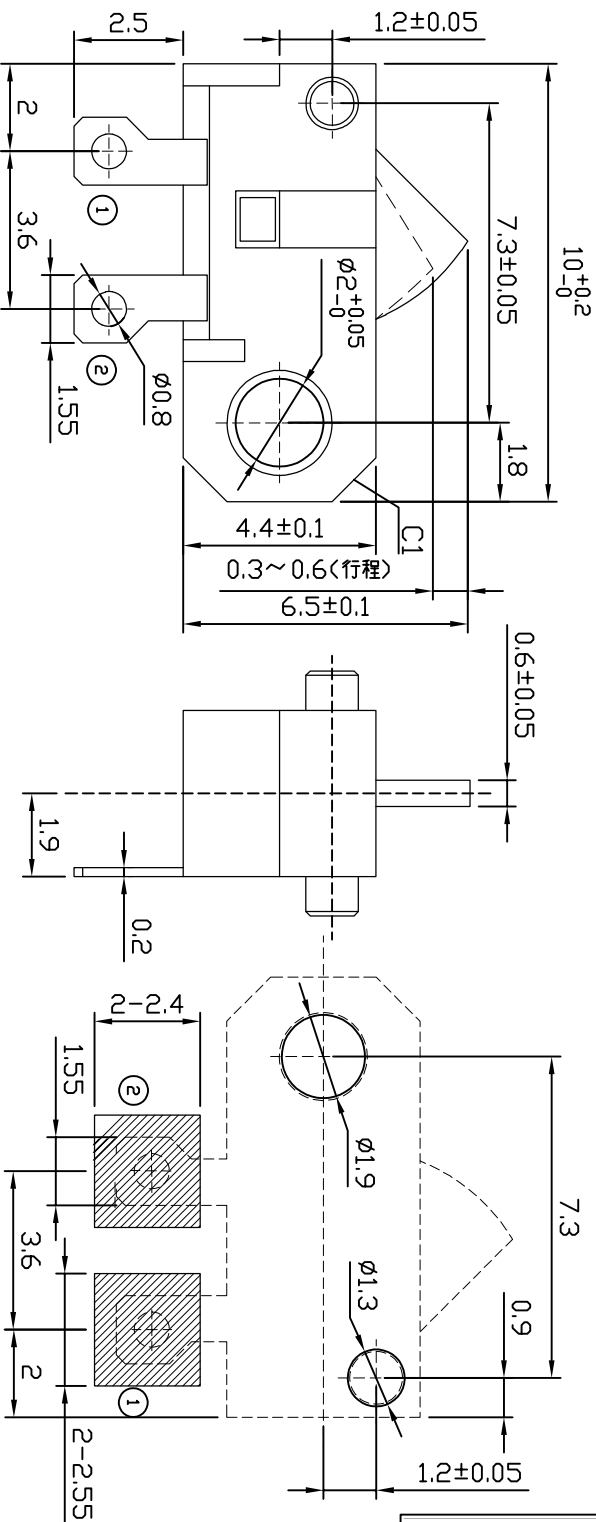

P.C.B LAYOUT

SPECIFICATIONS:

Operating temperature range:-10℃to+60℃
Rating:Max 100mA 16V DC
Insulation resistance:50MΩ min.100V DC
Dielectric strength:500V AC.1Min
Contact resistance:100mΩ Max
Life:20,000 Cycles
Operating force:20±10gf Max



RÖHS COMPLIANT Pb-Free				DESIGN			
TOLERANCE				DATE			
UNLESS OTHERWISE STATED				TITLE			
XX	±0.20	SIZE	A4	CHKD	DATE	Detector Switch	
XX	±0.15	REV	A		DATE	LM-V-116(反)	
XXX	±0.10	UNIT	mm	APPD	DATE		
±	±2°	SCALE	6:1				
				SHEET	1/3		
				PRINT DATE	2025.02.11		