

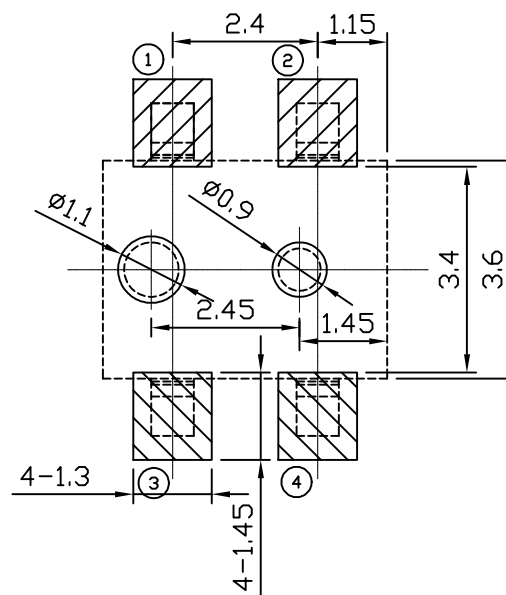
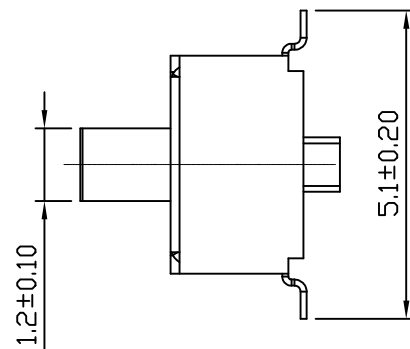
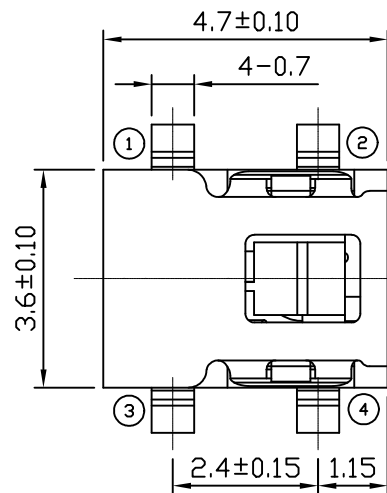


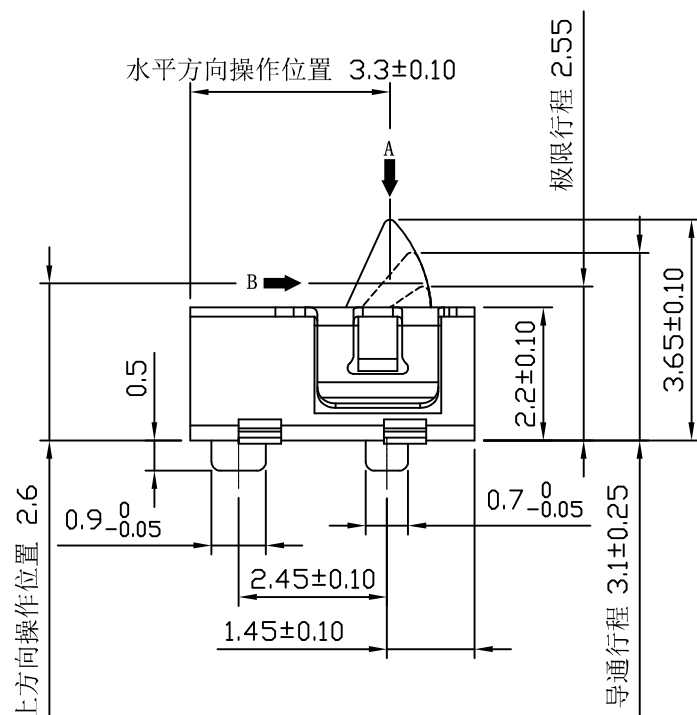

P.C.B LAYOUT



SPECIFICATIONS:

Operating temperature range:-10°Cto+60°C
Rating:Max 500mA 16V DC Max
Insulation resistance:50M Ω min. 250V DC
Dielectric strength:250V. AC. 1Min
Contact resistance:500m Ω Max
Life:50,000 Cycles
Operating force:30 $\pm$ 10gf Max

  				 东莞市铭标电子科技有限公司 Ming Biao Electronic Technology Co., Ltd.			
TOLERANCE				DESIGN	DATE	TITLE	Detector Switch
UNLESS OTHERWISE STATED				WYF	2024.06.15		
X.X	±0.20	SIZE	A4	CHKD	DATE	MODEL	LM-V-221T有柱
X.XX	±0.15	REV	A				
X.XXX	±0.10	UNIT	mm	APPD	DATE	SHEET	1/3
	±2°	SCALE	8:1			PRINT DATE	2025.05.17
							