
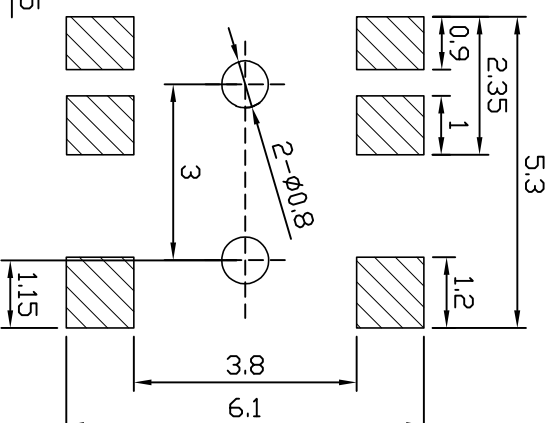
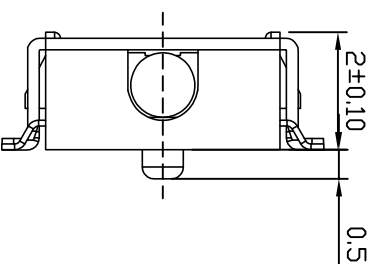


本公司智慧财产未经许可不得复制

SPECIFICATIONS:

Operating temperature range:-10°C to +60°C
 Rating: Max 50mA 16V DC
 Insulation resistance: 50M Ω min. 100V DC
 Dielectric strength: 250V AC, 1min
 Contact resistance: 200m Ω Max
 Life: 50,000 Cycles
 Operating force: 90 $\pm$ 20gf Max

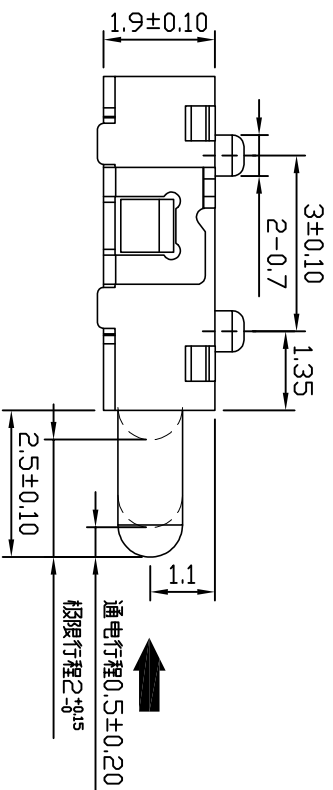

				 东莞市铭标电子科技有限公司 Ming Biao Electronic Technology Co., Ltd			
TOLERANCE				DESIGN		DATE	
UNLESS OTHERWISE STATED				 2024. 06. 15		TITLE	
XX	±0.20	SIZE	A4	CHKD	DATE	MODEL	LM-V-305K
XXX	±0.15	REV	A				
X.XXX	±0.10	UNIT	mm	APPD	DATE	SHEET	1/3
A	±2°	SCALE	8:1			PRINT DATE	2025.02.11
				 			