




本公司智慧财产未经许可不得复制
ming biao copyright,may not be used without permission from ming biao.


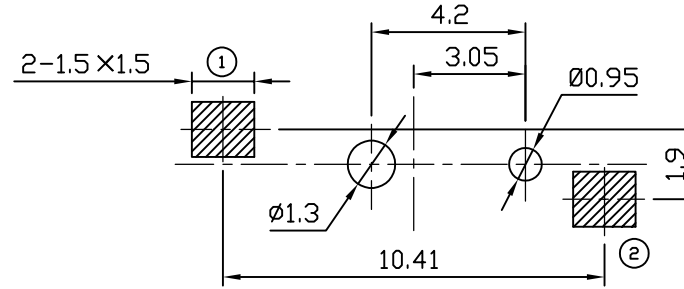


P.C.B LAYOUT

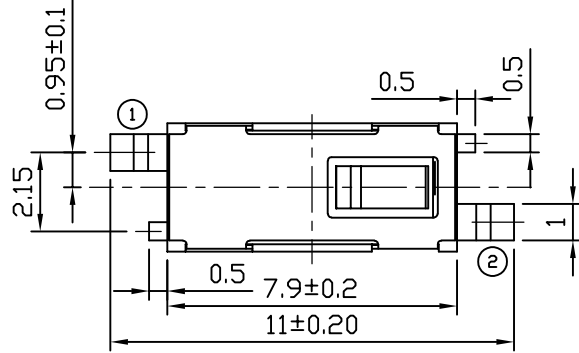

水平方向操作位置 3.75

垂直方向操作位置 1.25±0.50

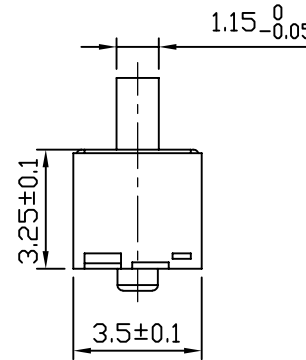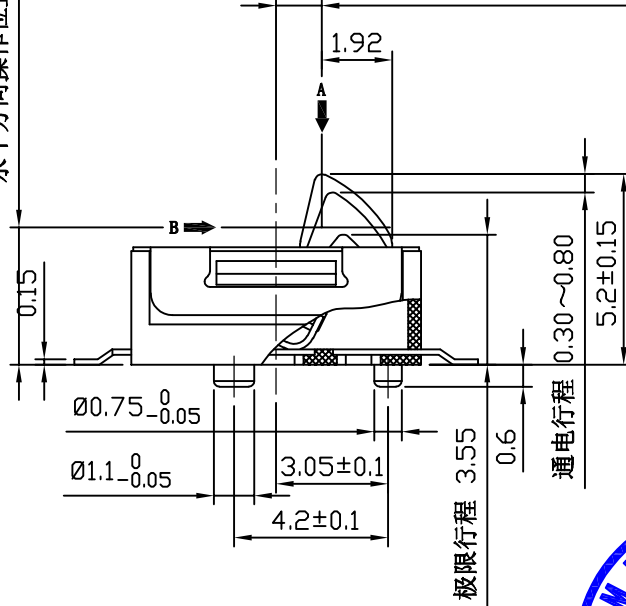

SPECIFICATIONS:

Operating temperature range:-10℃to+60℃
Rating:Max 50mA 16V DC
Insulation resistance:50MΩ min.100V DC
Dielectric strength:250V. AC.1Min
Contact resistance:500mΩ Max
Life:50,000 Cycles
Operating force:30±15gf Max



  				东莞市铭标电子科技有限公司 Ming Biao Electronic Technology Co., Ltd.							
TOLERANCE				DESIGN		DATE		TITLE		Detector Switch	
UNLESS OTHERWISE STATED				WYJ		2024. 06. 14					
X.X	±0.20	SIZE	A4	CHKD		DATE		MODEL		LM-V-310	
X.XX	±0.15	REV	A								
X.XXX	±0.10	UNIT	mm	APPD		DATE		SHEET		1/3	
	±2°	SCALE	5:1					PRINT DATE		2025.02.11	
											