


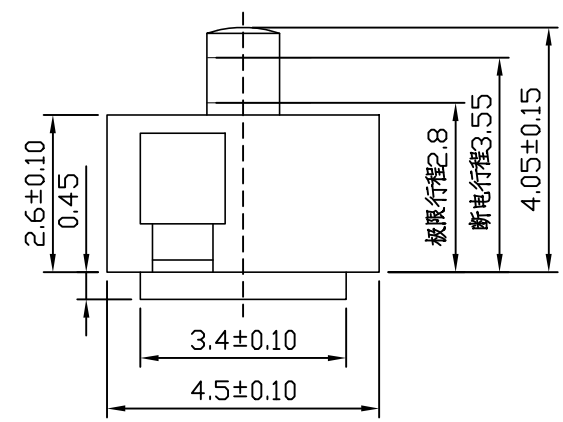
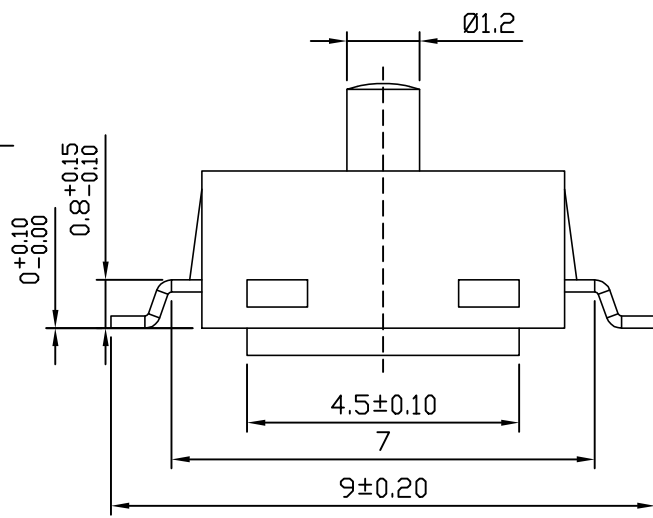


本公司智慧财产未经许可不得复制
ming biao copyright,may not be used without permission from ming biao.

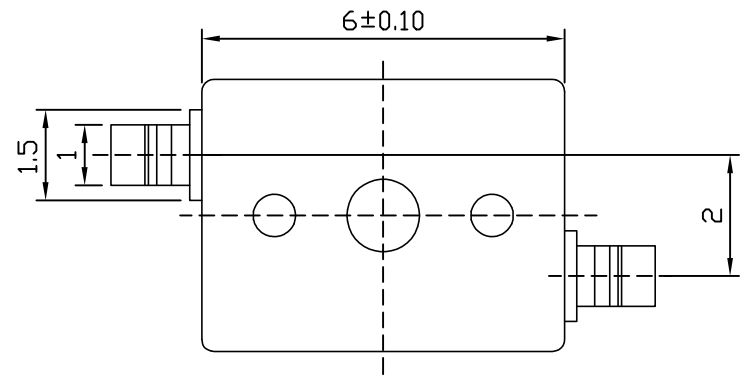

CIRCUIT


P.C.B LAYOUT

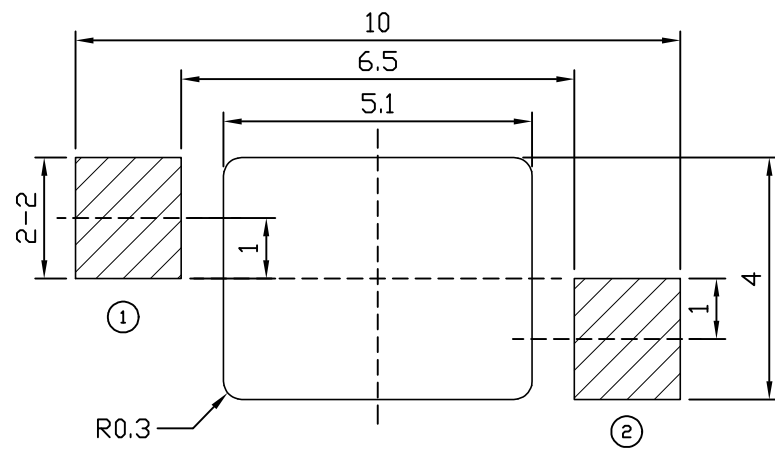

SPECIFICATIONS:

Operating temperature range:-10℃to+60℃
Rating:Max 500mA 16V DC
Insulation resistance:50MΩ min. 250V DC
Dielectric strength:250V. AC. 1Min
Contact resistance:200mΩ Max
Life:20,000 Cycles
Operating force:20±5gf Max



RoHS COMPLIANT Pb Pb-Free HF Halogen Free				 东莞市铭标电子科技有限公司 Ming Biao Electronic Technology Co., Ltd.					
TOLERANCE				DESIGN	DATE	TITLE	Detector Switch		
UNLESS OTHERWISE STATED				WYF	2024.06.14				
X.X	±0.20	SIZE	A4	CHKD	DATE	MODEL	LM-V-511		
X.XX	±0.15	REV	A	APPD		DATE	SHEET	1/3	
X.XXX	±0.10	UNIT	mm						
	±2°	SCALE	8:1			PRINT DATE	2025.06.14		