

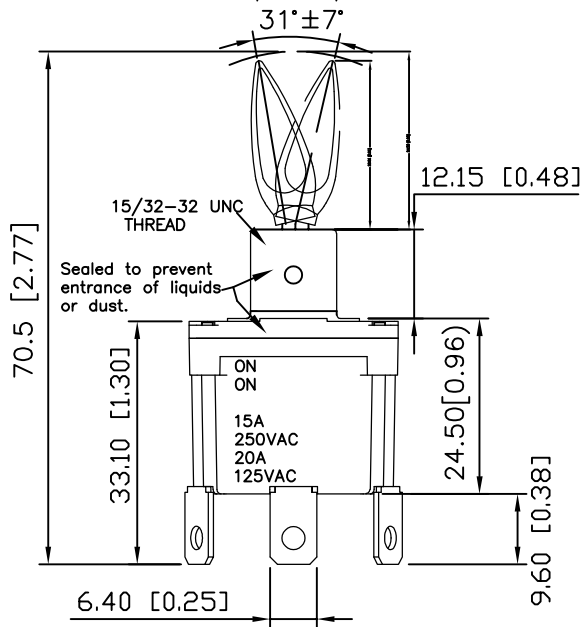
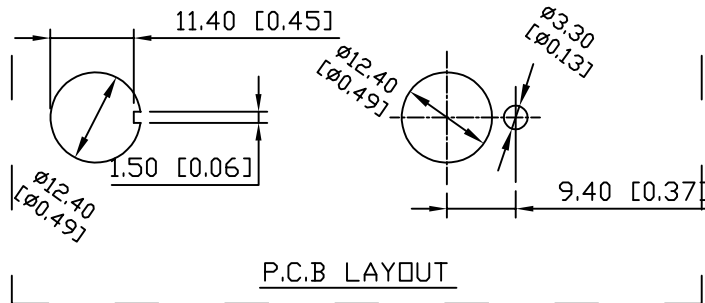
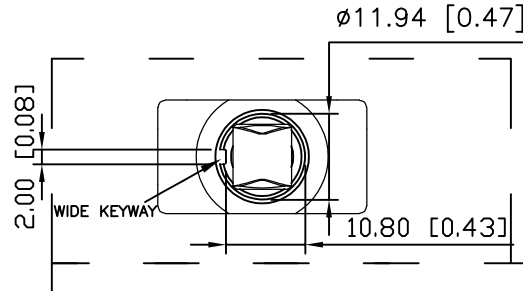


本公司智慧财产未经许可不得复制
ming biao copyright,may not be used without permission from ming biao.

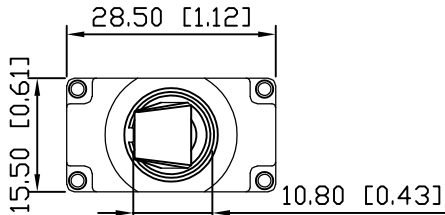

SPECIFICATIONS:

- CONTACT RESISTANCE: 20mΩ.(Max)
- INSULATION RESISTANCE: 100VDC-100MΩ.(Min)
- DIELECTRIC STRENGTH: 1500VAC-1MINUTE.
- MECHANICAL LIFE CYCLE: 100,000 CYCLES.
- OPERATING TEMPERATURE: -40 TO +85°C.
- FRONT SEAL: IP 68.

RATING:

- RESISTIVE LOAD: 10A 125/250VAC, 15A 28VDC.
- INDUCTIVE LOAD: 15A 28VDC.

Model	Switching Position			Schematic
	ON	OFF	ON	
SG1	ON	NONE	ON	
SG2	OFF	NONE	(ON)	
SG3	ON	OFF	ON	
SG4	(ON)	OFF	(ON)	
SG5	(ON)	OFF	ON	
SG9	OFF	NA	ON	
Term. Comm.	2-1	OPEN	2-3	

NO	PART NAME	MATERIAL	Q'TY	FINISHING
1	ACTUATOR	COPPER ALLOY	1	Cr PLATED
2	HOUSING	NYLON (UL94V-0)	1	
3	BUSHING	ZINC ALLOY	1	
4	TERMINAL	COPPER ALLOY	3	Ag PLATED
5	CONTACT	COPPER ALLOY	1	Ag PLATED
6	O-RING	SILICONE RUBBER	1	
7	SHEEL	STAINLESS STELL	1	Ni PLATED



ROHS COMPLIANT			
Pb-Free			
Halogen Free			
TOLERANCE			
UNLESS OTHERWISE STATED			
X.X	±0.20	SIZE	A4
X.XX	±0.15	REV	A
X.XXX	±0.10	UNIT	mm
∠	±2°	SCALE	1:1

东莞市铭标电子科技有限公司
Ming Biao Electronic Technology Co.,Ltd.

DESIGN	DATE	TITLE		
WYJ	2024. 09. 15	Toggle Switches		
CHKD	DATE	MODEL		
		HT-SG1B3T1T23		
APPD	DATE	SHEET	1/2	
		PRINT DATE	2025.02.11	