
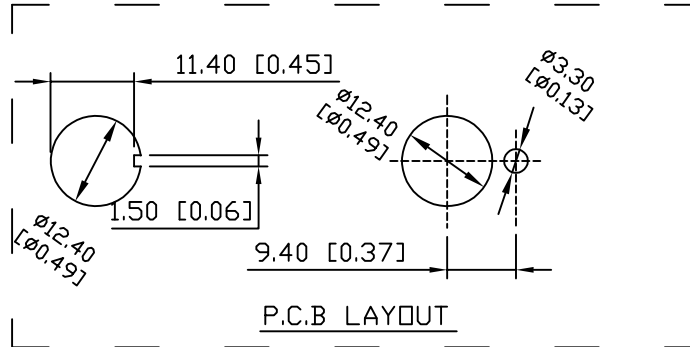
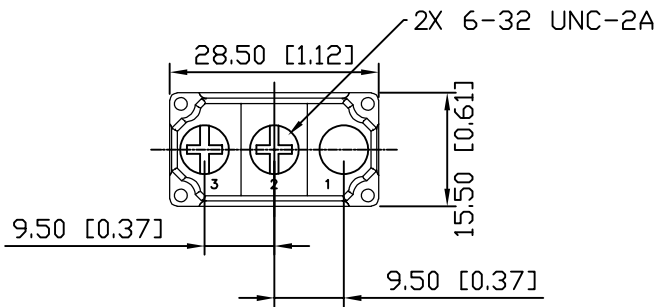
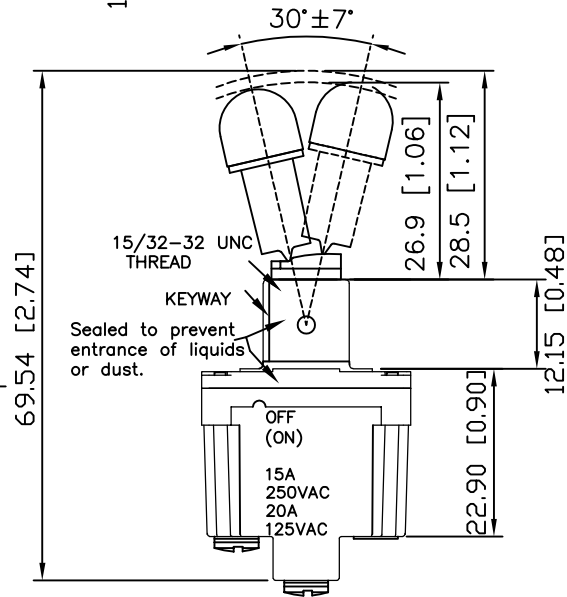


本公司智慧财产未经许可不得复制
ming biao copyright,may not be used without permission from ming biao.



SPECIFICATIONS:

- 1.CONTACT RESISTANCE: 20mΩ.(Max)
- 2.INSULATION RESISTANCE: 100VDC-100MΩ.(Min)
- 3.DIELECTRIC STRENGTH: 1500VAC-1MINUTE.
- 4.MECHANICAL LIFE CYCLE: 100,000 CYCLES.
- 5.OPERATING TEMPERATURE: -40 TO +85°C.
- 6.FRONT SEAL: IP 68.


RATING:

- 1.RESISTIVE LOAD: 15A 125/250VAC, 15A 28VDC. 2.INDUCTIVE LOAD: 15A 28VDC.

NO	PART NAME	MATERIAL	Q'TY	FINISHING
1	ACTUATOR	COPPER ALLOY	1	Cr PLATED
2	HOUSING	NYLON (UL94V-0)	1	
3	BUSHING	ZINC ALLOY	1	
4	TERMINAL	COPPER ALLOY	3	Ag PLATED
5	CONTACT	COPPER ALLOY	1	Ag PLATED
6	O-RING	SILICONE RUBBER	1	
7	SHEEL	STAINLESS STELL	1	Ni PLATED

Model	Switching Position			Schematic
	1 COM 3	1 COM 3	1 COM 3	
SG1	ON	NONE	ON	 (SG1,SG3,SG4,SG5)
SG2	OFF	NONE	(ON)	
SG3	ON	OFF	ON	
SG4	(ON)	OFF	(ON)	
SG5	(ON)	OFF	ON	
SG9	OFF	NONE	ON	 (SG2,SG9)
SGA	(OFF)	NONE	ON	
SGB	(ON)	NONE	ON	
SGC	ON	NONE	(ON)	
Term. Comm.	2-1	OPEN	2-3	



  				 东莞市铭标电子科技有限公司 Ming Biao Electronic Technology Co., Ltd.				
TOLERANCE				DESIGN	DATE	TITLE	Toggle Switches	
UNLESS OTHERWISE STATED				WYJ	2024. 09. 15			
X.X	±0.20	SIZE	A4	CHKD	DATE	MODEL	HT-SG2B9T5T11	
X.XX	±0.15	REV	A					
X.XXX	±0.10	UNIT	mm	APPD	DATE	SHEET	1/2	
	±2°	SCALE	1:1			PRINT DATE	2025.02.11	