
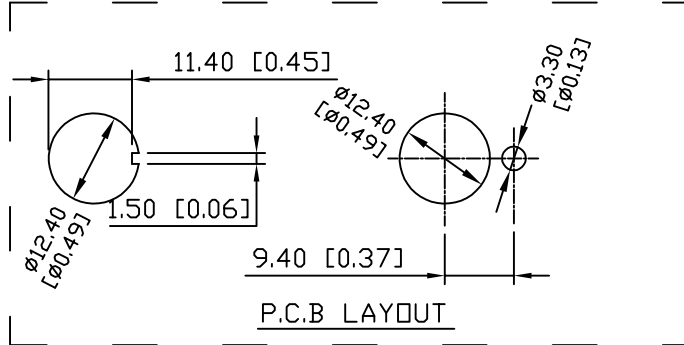


本公司智慧财产未经许可不得复制
ming biao copyright,may not be used without permission from ming biao.

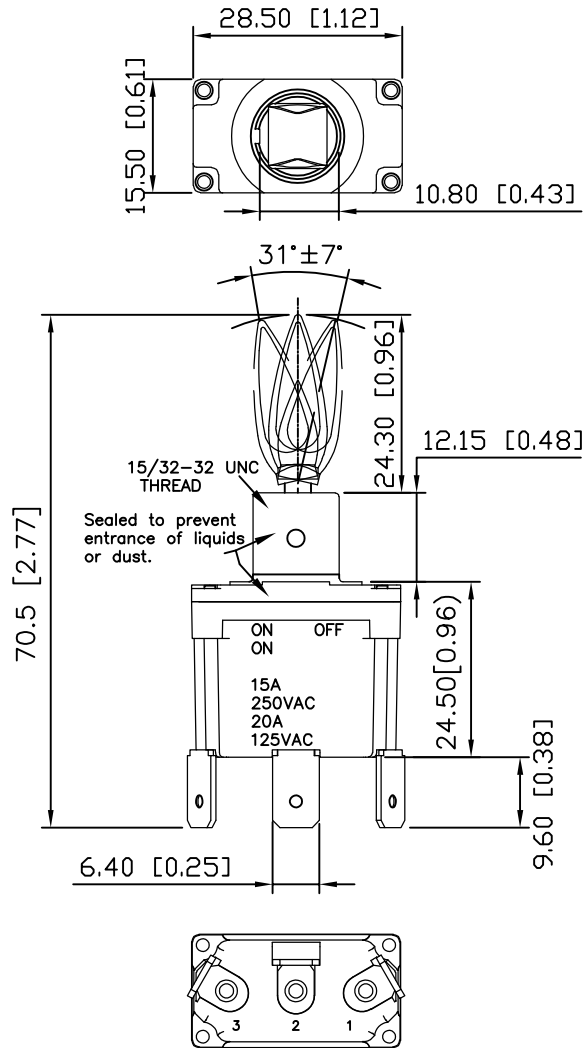

SPECIFICATIONS:

- 1.CONTACT RESISTANCE: 20mΩ.(Max)
- 2.INSULATION RESISTANCE: 100VDC-100MΩ.(Min)
- 3.DIELECTRIC STRENGTH: 1500VAC-1MINUTE.
- 4.MECHANICAL LIFE CYCLE: 100,000 CYCLES.
- 5.OPERATING TEMPERATURE: -40 TO +85°C.
- 6.FRONT SEAL: IP 68.


RATING:

- 1.RESISTIVE LOAD: 10A 125/250VAC, 15A 28VDC.
- 2.INDUCTIVE LOAD: 15A 28VDC.
- 3.LAMP LOAD: 5A 28VDC.

Model	Switching Position			Schematic
	1 2 3 COM.	1 2 3 COM.	1 2 3 COM.	
SG1	ON	NONE	ON	
SG2	OFF	NONE	(ON)	
SG3	ON	OFF	ON	
SG4	(ON)	OFF	(ON)	
SG5	(ON)	OFF	ON	
SG9	OFF	NA	ON	
Term. Comm.	2-1	OPEN	2-3	

NO	PART NAME	MATERIAL	Q'TY	FINISHING
1	ACTUATOR	COPPER ALLOY	1	Cr PLATED
2	HOUSING	NYLON (UL94V-0)	1	
3	BUSHING	ZINC ALLOY	1	
4	TERMINAL	COPPER ALLOY	3	Ag PLATED
5	CONTACT	COPPER ALLOY	1	Ag PLATED
6	O-RING	SILICONE RUBBER	1	
7	SHEEL	STAINLESS STELL	1	Ni PLATED



RoHS COMPLIANT Pb-Free Halogen Free				 东莞市铭标电子科技有限公司 Ming Biao Electronic Technology Co., Ltd.				
TOLERANCE				DESIGN	DATE	TITLE	Toggle Switches	
UNLESS OTHERWISE STATED				<i>WYJ</i>	2024. 09. 15			
X.X	±0.20	SIZE	A4	CHKD	DATE	MODEL	HT-SG3B3T1T24	
X.XX	±0.15	REV	A					
X.XXX	±0.10	UNIT	mm	APPD	DATE	SHEET	1/2	
	±2°	SCALE	1:1			PRINT DATE	2025.02.11	