


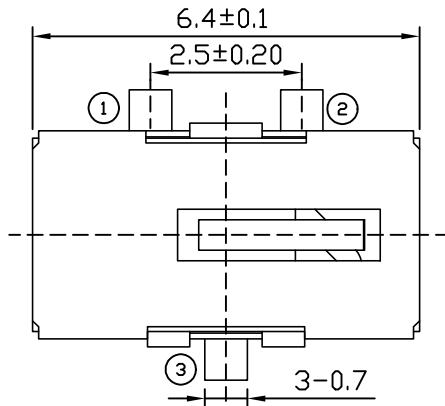


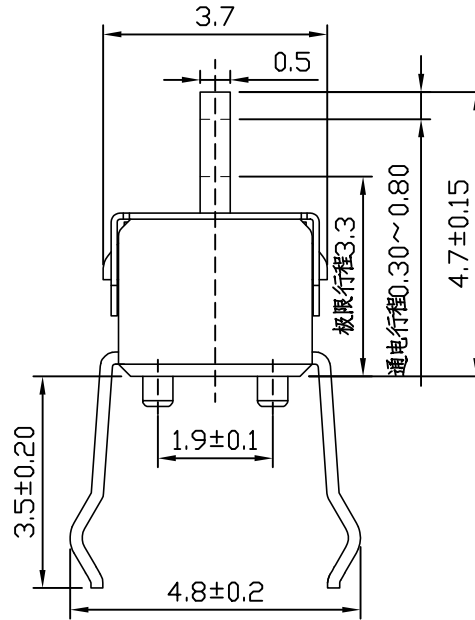


垂直方向操作位置1.6±0.5

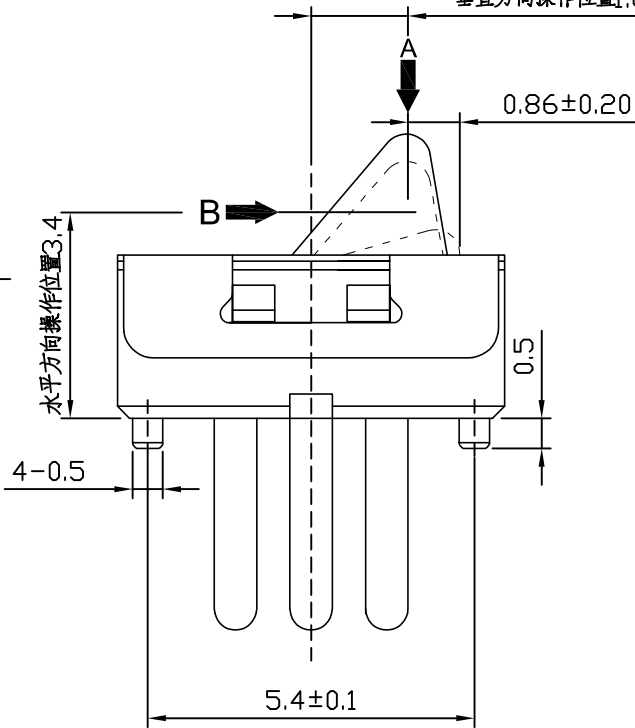

本公司智慧财产未经许可不得复制
ming biao copyright, may not be used without permission from ming biao.

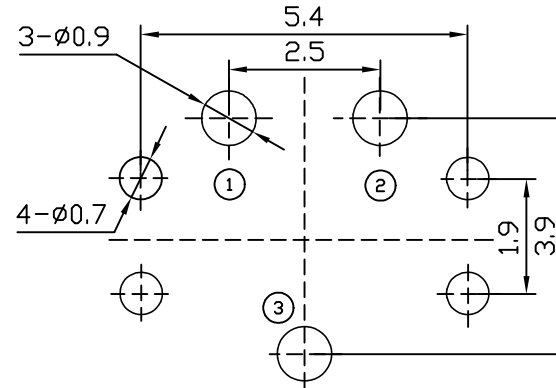

P.C.B LAYOUT



CIRCUIT

SPECIFICATIONS:

Operating temperature range: -10°C to +60°C
Rating: Max 500mA 16V DC
Insulation resistance: 50MΩ min. 250V DC
Dielectric strength: 250V. AC. 1Min
Contact resistance: 200mΩ Max
Life: 50,000 Cycles
Operating force: 30±10gf Max



东莞市铭标电子科技有限公司
Ming Biao Electronic Technology Co., Ltd.

TOLERANCE			
UNLESS OTHERWISE STATED			
X.X	±0.20	SIZE	A4
X.XX	±0.15	REV	A
X.XXX	±0.10	UNIT	mm
△	±2°	SCALE	8:1

DESIGN	DATE	TITLE		
wyf	2024.06.13	Detector Switch		
CHKD	DATE	MODEL		
		LM-V-105S 插件		
APPD	DATE	SHEET	1/3	
		PRINT DATE	2025.06.14	