

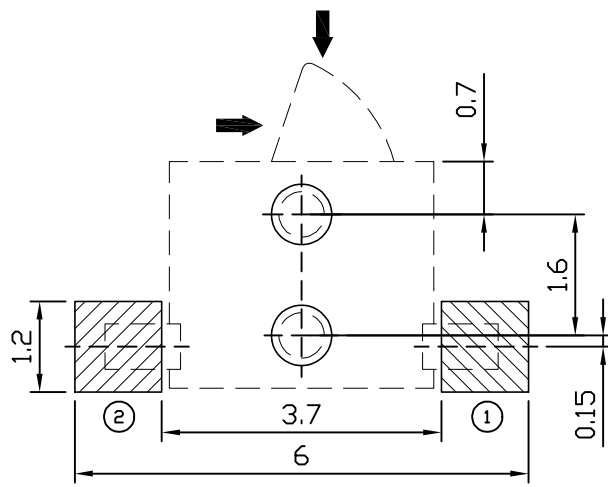
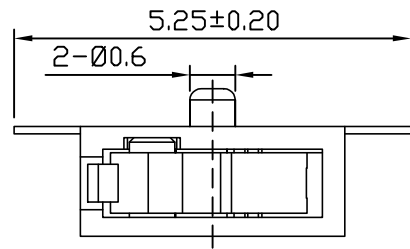
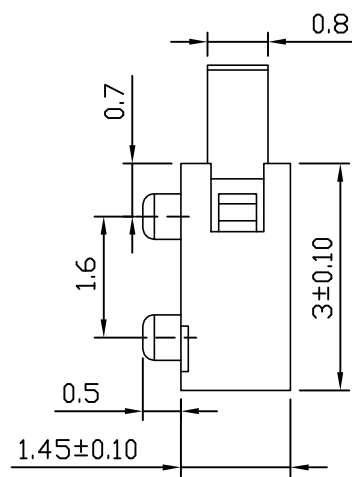


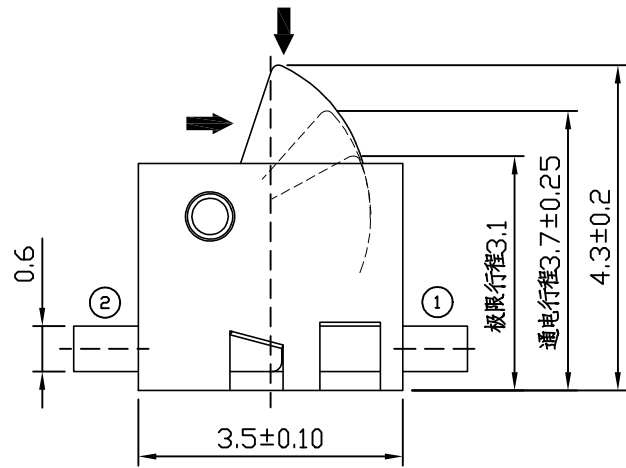

P.C.B LAYOUT


本公司智慧财产未经许可不得复制
ming biao copyright, may not be used without permission from ming biao.



SPECIFICATIONS:

Operating temperature range: -10°C to +60°C
Rating: Max 50mA 12V DC
Insulation resistance: 50MΩ min. 100V DC
Dielectric strength: 100V. AC. 1Min
Contact resistance: 300mΩ Max
Life: 20,000 Cycles
Operating force: 30±10gf Max



RoHS COMPLIANT Pb Pb-Free Hg Halogen Free				 东莞市铭标电子科技有限公司 Ming Biao Electronic Technology Co., Ltd.				
TOLERANCE				DESIGN	DATE	TITLE	Detector Switch	
UNLESS OTHERWISE STATED				WYJ	2024.06.12			
X.X	±0.20	SIZE	A4	CHKD	DATE	MODEL	LM-V-309Y	
X.XX	±0.15	REV	A					
X.XXX	±0.10	UNIT	mm	APPD	DATE	SHEET	1/3	
	±2°	SCALE	10:1			PRINT DATE	2025.06.14	

