

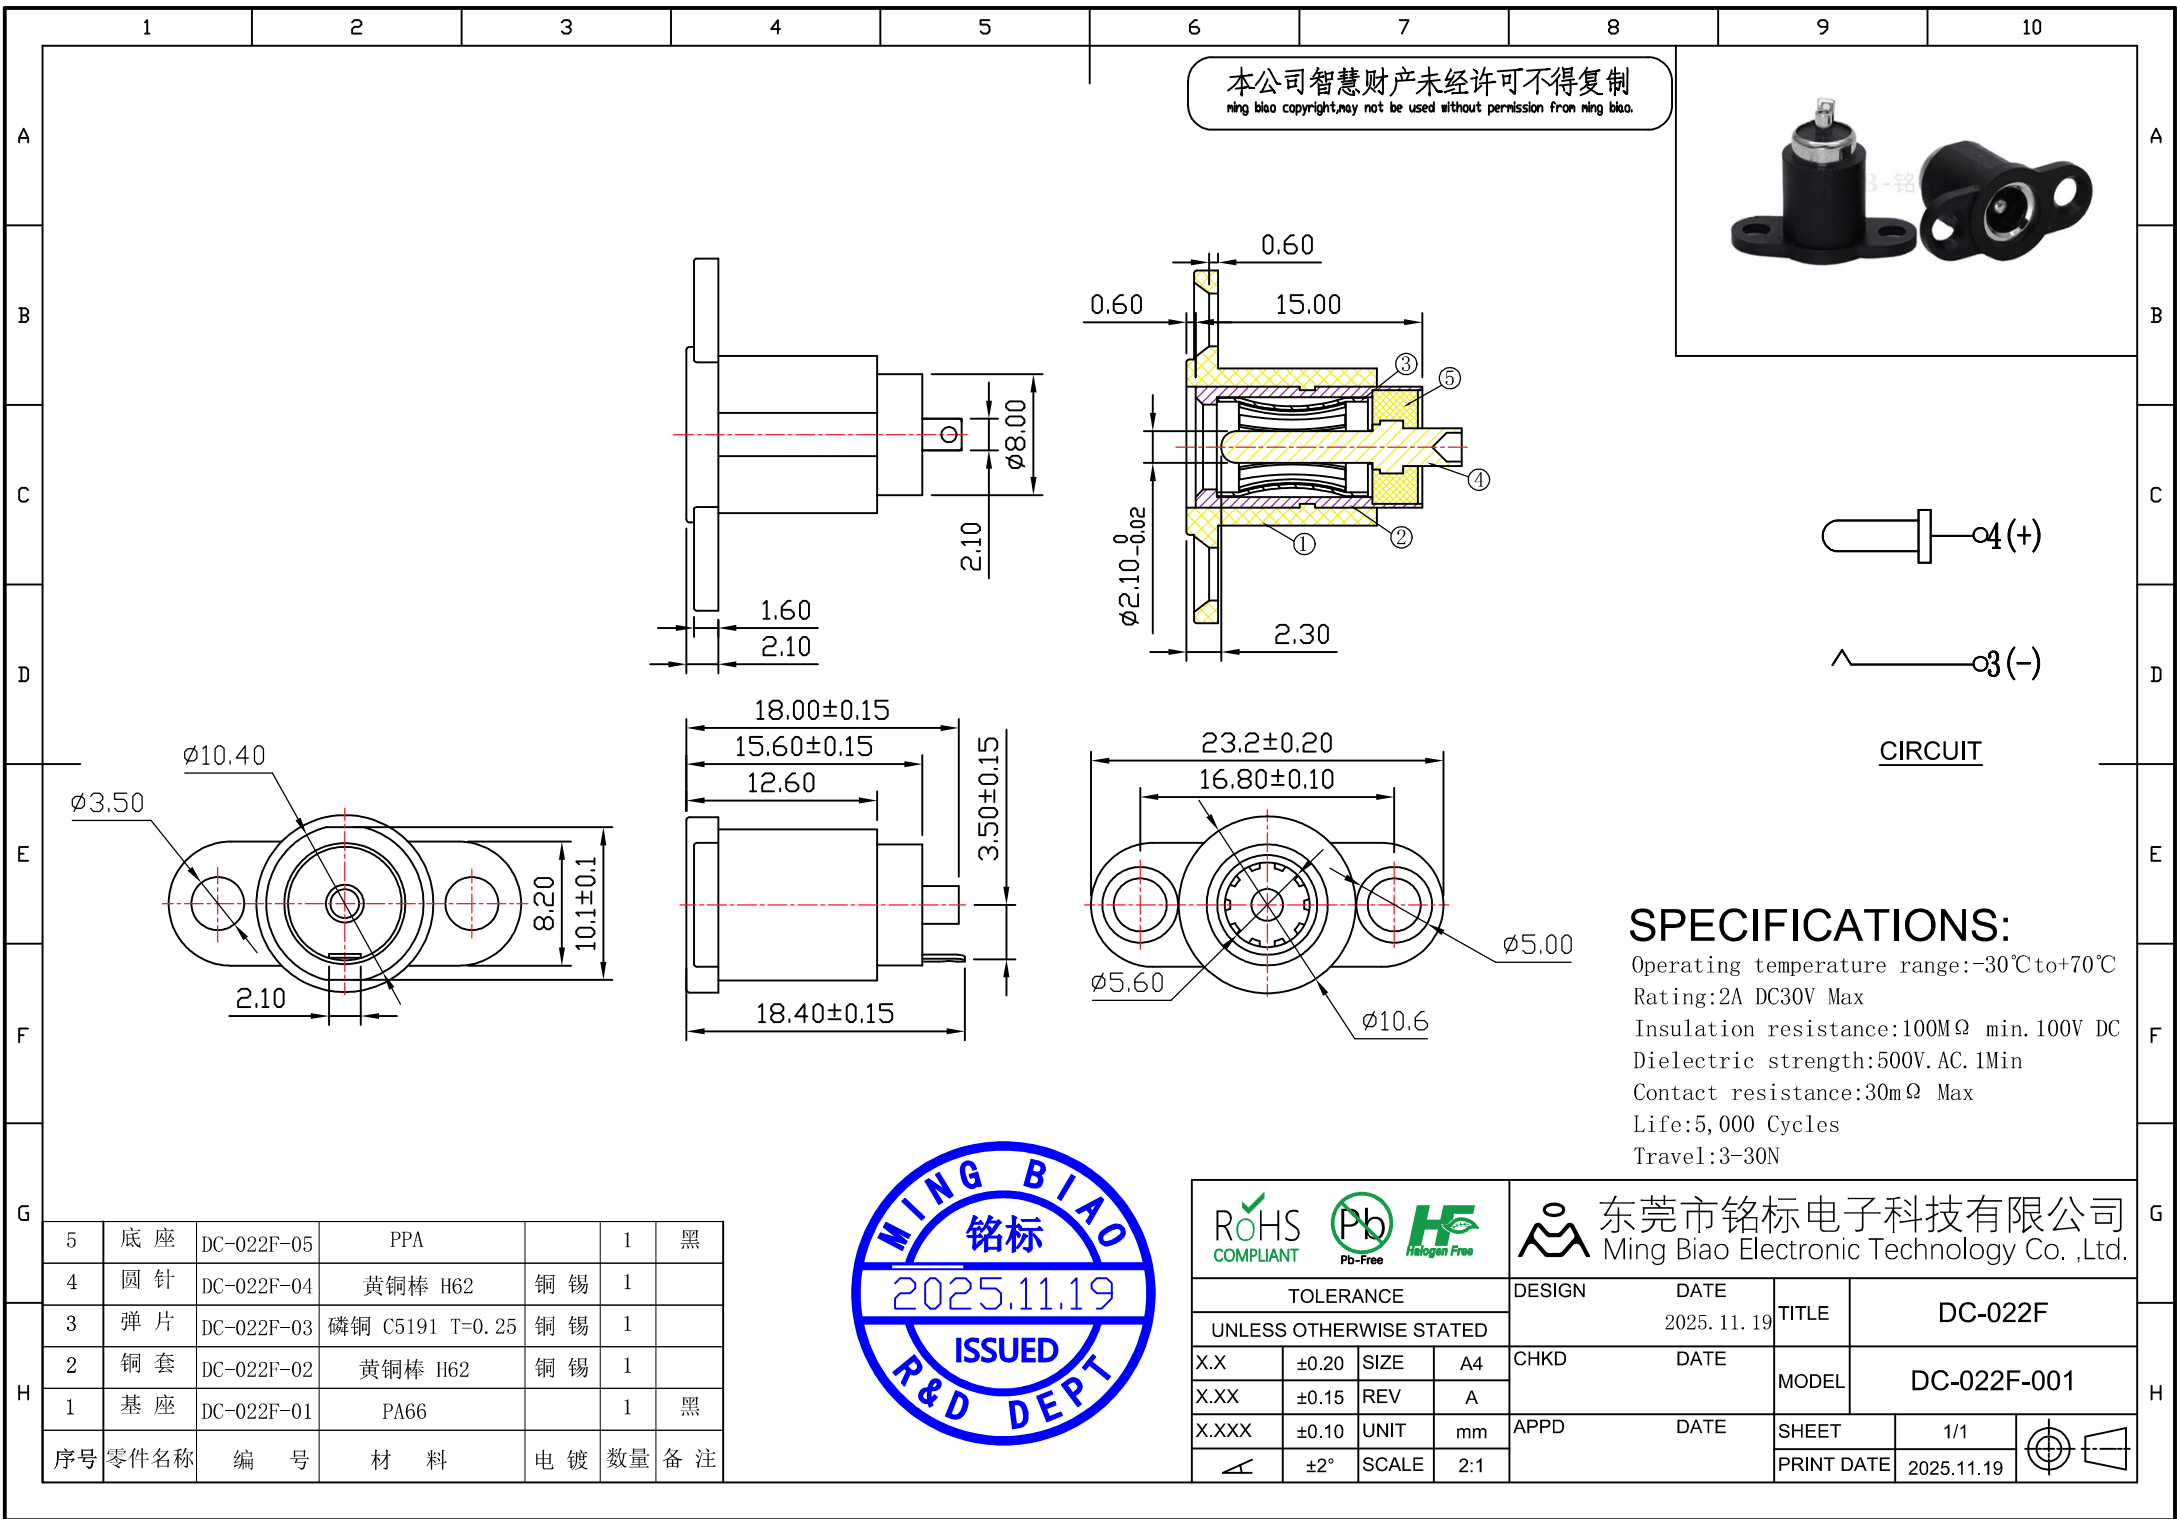




本公司智慧财产未经许可不得复制
ning biao copyright, may not be used without permission from ning biao.



CIRCUIT

SPECIFICATIONS:

Operating temperature range: -30°C to +70°C
Rating: 2A DC 30V Max
Insulation resistance: 100MΩ min. 100V DC
Dielectric strength: 500V. AC. 1Min
Contact resistance: 30mΩ Max
Life: 5,000 Cycles
Travel: 3-30N

5	底座	DC-022F-05	PPA		1	黑
4	圆针	DC-022F-04	黄铜棒 H62	铜锡	1	
3	弹片	DC-022F-03	磷铜 C5191 T=0.25	铜锡	1	
2	铜套	DC-022F-02	黄铜棒 H62	铜锡	1	
1	基座	DC-022F-01	PA66		1	黑
序号	零件名称	编号	材料	电镀	数量	备注



RoHS COMPLIANT Pb-Free Halogen Free	东莞市铭标电子科技有限公司 Ming Biao Electronic Technology Co., Ltd.			
TOLERANCE UNLESS OTHERWISE STATED	DESIGN	DATE	TITLE	DC-022F
X.X ±0.20 SIZE A4	CHKD	DATE	MODEL	DC-022F-001
X.XX ±0.15 REV A	APPD		SHEET	1/1
X.XXX ±0.10 UNIT mm	DATE		PRINT DATE	2025.11.19
SCALE 2:1				