

12345678910

A

B

C

D

E

F

G

H

A

B

C

D







E

F

G

H

本公司智慧财产未经许可不得复制
ning biao copyright may not be used without permission from ning biao.

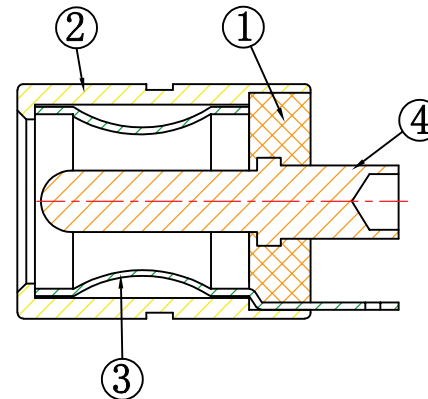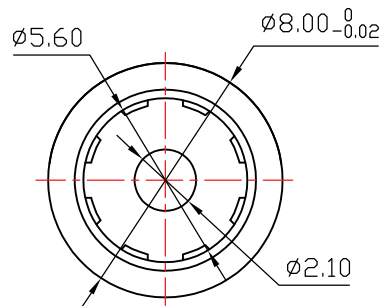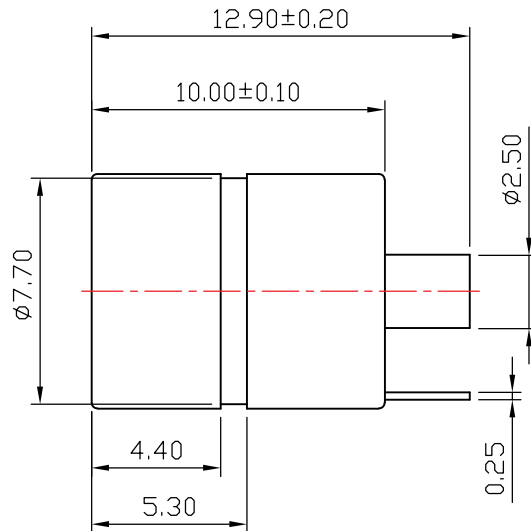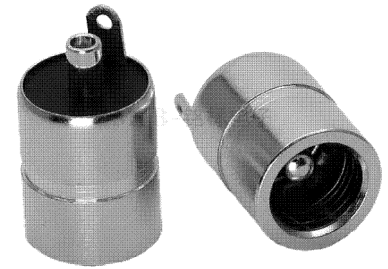

CIRCUIT

技术要求

- 额定值: DC 24V 2A;
- 接触电阻: $\leq 30\text{m}\Omega$;
- 绝缘电阻: $\geq 100\text{M}\Omega$;
- 耐压: AC500V (50Hz) 1min;
- 插拔力: 3-30N;
- 使用温度范围: $-30\sim 70^{\circ}\text{C}$;
- 使用寿命: 5000次;



4	圆 针	DC-084-04	黄铜棒 H62	铜 锡	1	
3	弹 片	DC-084-03	磷铜 C5191 T=0.25	铜 锡	1	
2	铜 套	DC-084-02	黄铜棒 H59 C3604	铜 锡	1	
1	基 座	DC-084-01	PPA		1	黑
序号	零件名称	编 号	材 料	电 镀	数 量	备 注

ROHS COMPLIANT Pb Pb-Free HF Halogen Free				东莞市铭标电子科技有限公司 Ming Biao Electronic Technology Co., Ltd.			
TOLERANCE				DESIGN	DATE	TITLE	DC-084(8X10)带接地
UNLESS OTHERWISE STATED					2024. 09. 05		
X.X	±0.20	SIZE	A4	CHKD	DATE	MODEL	DC-084-003
X.XX	±0.15	REV	A				
X.XXX	±0.10	UNIT	mm	APPD	DATE	SHEET	1/1
≤	±2°	SCALE	4:1			PRINT DATE	2025.02.13

